

(12) **United States Patent**  
Walker

(10) **Patent No.:** US 10,262,975 B1  
(45) **Date of Patent:** Apr. 16, 2019

(54) **PACKAGE INCLUDING A PLURALITY OF STACKED SEMICONDUCTOR DEVICES, AN INTERPOSER AND INTERFACE CONNECTIONS**

2224/16227 (2013.01); H01L 2224/17181 (2013.01); H01L 2225/06513 (2013.01); H01L 2225/06517 (2013.01);

(Continued)

(71) Applicant: **Darryl G. Walker**, San Jose, CA (US)

(58) **Field of Classification Search**

CPC ..... G11C 16/04  
USPC ..... 365/185.01-185.33  
See application file for complete search history.

(72) Inventor: **Darryl G. Walker**, San Jose, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,157,067 A 12/2000 Hsu et al.  
6,191,479 B1 2/2001 Herrell et al.

(Continued)

(21) Appl. No.: 16/130,962

(22) Filed: **Sep. 13, 2018**

**Related U.S. Application Data**

(63) Continuation of application No. 15/934,183, filed on Mar. 23, 2018, now Pat. No. 10,115,710, which is a (Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 15/934,183, filed Mar. 23, 2018, of which the present application is a Continuation.

(Continued)

(51) **Int. Cl.**

G11C 16/04 (2006.01)  
H01L 25/065 (2006.01)

(Continued)

Primary Examiner — Harry W Byrne



(52) **U.S. Cl.**

CPC ..... H01L 25/0657 (2013.01); G11C 5/025 (2013.01); G11C 5/10 (2013.01); G11C 5/147 (2013.01); G11C 11/4063 (2013.01); G11C 11/4074 (2013.01); G11C 11/4085 (2013.01); G11C 11/4093 (2013.01); G11C 11/4094 (2013.01); G11C 11/4099 (2013.01); H01L 21/76898 (2013.01); H01L 23/481 (2013.01); H01L 24/02 (2013.01); H01L 24/13 (2013.01); H01L 24/16 (2013.01); H01L 28/40 (2013.01); H01L 27/1087 (2013.01); H01L 2224/02372 (2013.01); H01L 2224/02381 (2013.01); H01L 2224/13024 (2013.01); H01L 2224/13025 (2013.01); H01L 2224/16146 (2013.01); H01L

(57) **ABSTRACT**

A system can include a first semiconductor device including a first capacitor with a first terminal coupled to receive a power supply potential; and a second semiconductor device including a first voltage generator coupled to the first terminal of the first capacitor, the first voltage generator provides a first voltage generator output potential at an output terminal. The first capacitor can include a first capacitor node and a second capacitor node, the first capacitor node and the second capacitor node each include at least one substantially vertically formed conductive portion in a substrate of the first semiconductor device that are separated from one another by at least one capacitor dielectric, the first capacitor node is electrically connected to the first terminal of the first capacitor.

22 Claims, 10 Drawing Sheets

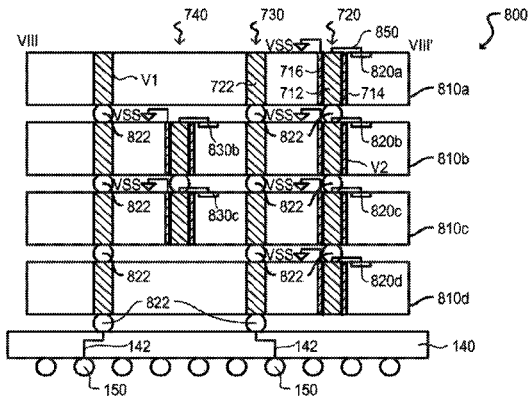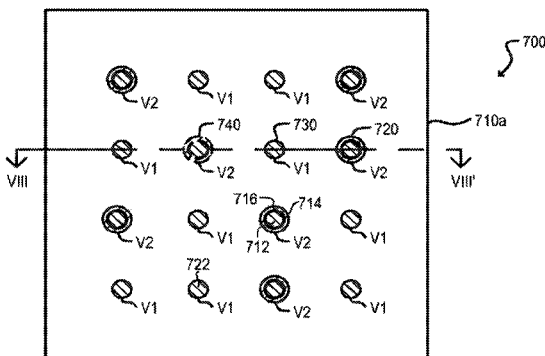

**Related U.S. Application Data**

continuation of application No. 15/836,851, filed on Dec. 9, 2017, now Pat. No. 9,929,127, which is a continuation of application No. 15/626,534, filed on Jun. 19, 2017, now Pat. No. 9,842,830, which is a continuation of application No. 15/469,448, filed on Mar. 24, 2017, now Pat. No. 9,685,427, which is a continuation of application No. 15/357,829, filed on Nov. 21, 2016, now Pat. No. 9,607,969, which is a continuation of application No. 15/245,563, filed on Aug. 24, 2016, now Pat. No. 9,508,692, which is a continuation of application No. 15/161,468, filed on May 23, 2016, now Pat. No. 9,431,088, which is a continuation of application No. 14/755,157, filed on Jun. 30, 2015, now Pat. No. 9,378,778.

(60) Provisional application No. 62/175,352, filed on Jun. 14, 2015.

(51) **Int. Cl.**

*GI1C 11/4099* (2006.01)  
*GI1C 5/14* (2006.01)  
*GI1C 11/4093* (2006.01)  
*H01L 23/00* (2006.01)  
*H01L 49/02* (2006.01)  
*H01L 23/48* (2006.01)  
*GI1C 5/02* (2006.01)  
*GI1C 11/4074* (2006.01)  
*GI1C 11/4094* (2006.01)  
*H01L 21/768* (2006.01)  
*GI1C 5/10* (2006.01)  
*GI1C 11/408* (2006.01)  
*GI1C 11/4063* (2006.01)  
*H01L 27/108* (2006.01)

(52) **U.S. Cl.**

CPC ..... *H01L 2225/06541* (2013.01); *H01L 2225/06544* (2013.01); *H01L 2924/1436* (2013.01); *H01L 2924/15311* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,828,666 B1 12/2004 Herrell et al.  
 6,936,877 B2 8/2005 Klee et al.

6,961,231 B1 11/2005 Alexander et al.  
 7,391,110 B2 6/2008 Cornelius  
 7,919,860 B2 4/2011 Murugan et al.  
 8,208,338 B2 6/2012 Kim  
 8,234,773 B2 8/2012 Bedair et al.  
 8,320,179 B2\* 11/2012 Norman ..... GI1C 8/16  
 365/185.05  
 8,325,539 B2\* 12/2012 Park ..... GI1C 7/1051  
 365/185.22  
 8,379,458 B1\* 2/2013 Or-Bach ..... H01L 21/76254  
 365/177  
 8,803,288 B1 8/2014 Marino et al.  
 9,101,068 B2 8/2015 Yun et al.  
 9,178,080 B2 11/2015 Kalnitsky et al.  
 9,257,834 B1 2/2016 Moghe et al.  
 9,548,288 B1 1/2017 Ramachandran et al.  
 2001/0025973 A1 10/2001 Yamada et al.  
 2002/0089810 A1 7/2002 Casper et al.  
 2003/0008469 A1 1/2003 Hwang et al.  
 2004/0080021 A1 4/2004 Casper et al.  
 2004/0188811 A1 9/2004 Vandentop et al.  
 2005/0239415 A1 10/2005 Sagae et al.  
 2007/0018298 A1 1/2007 Gamand  
 2007/0058308 A1 3/2007 Thijs et al.  
 2008/0185614 A1 8/2008 Gamand  
 2008/0185626 A1 8/2008 Cheng  
 2008/0284037 A1 11/2008 Andry et al.  
 2008/0285244 A1 11/2008 Knickerbocker  
 2009/0085217 A1 4/2009 Knickerbocker et al.  
 2009/0180236 A1 7/2009 Lee et al.  
 2009/0185327 A1 7/2009 Seymour  
 2009/0190236 A1 7/2009 Do  
 2010/0059879 A1 3/2010 Bielen  
 2010/0290292 A1\* 11/2010 Tanizaki ..... GI1C 16/10  
 365/185.22  
 2010/0327433 A1 12/2010 Sweeney et al.  
 2011/0108948 A1 5/2011 Kim et al.  
 2013/0100739 A1\* 4/2013 Tanizaki ..... GI1C 16/10  
 365/185.11  
 2013/0161792 A1 6/2013 Tran et al.  
 2016/0204110 A1 7/2016 Baskaran et al.  
 2016/0218046 A1 7/2016 Or-Bach et al.  
 2016/0268341 A1 9/2016 Nazarian et al.

OTHER PUBLICATIONS

Roozeboom et al., Ultrahigh-density (>0.4 uF/mm<sup>2</sup>) trench capacitors in silicon, First Int. Workshop on Power Supply on Chip (PowerSoC08), Sep. 22-24, 2008, Cork, Ireland.

\* cited by examiner

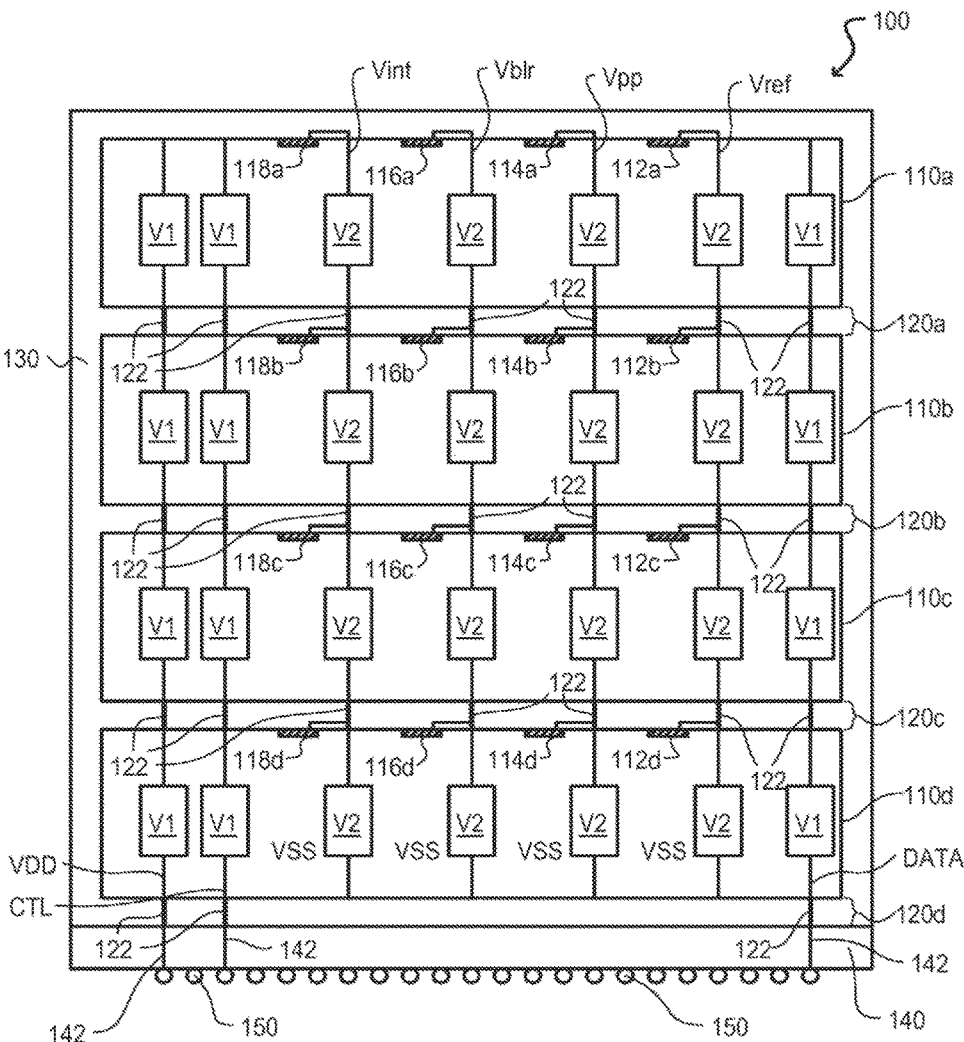


FIG. 1




FIG. 2A




FIG. 2B

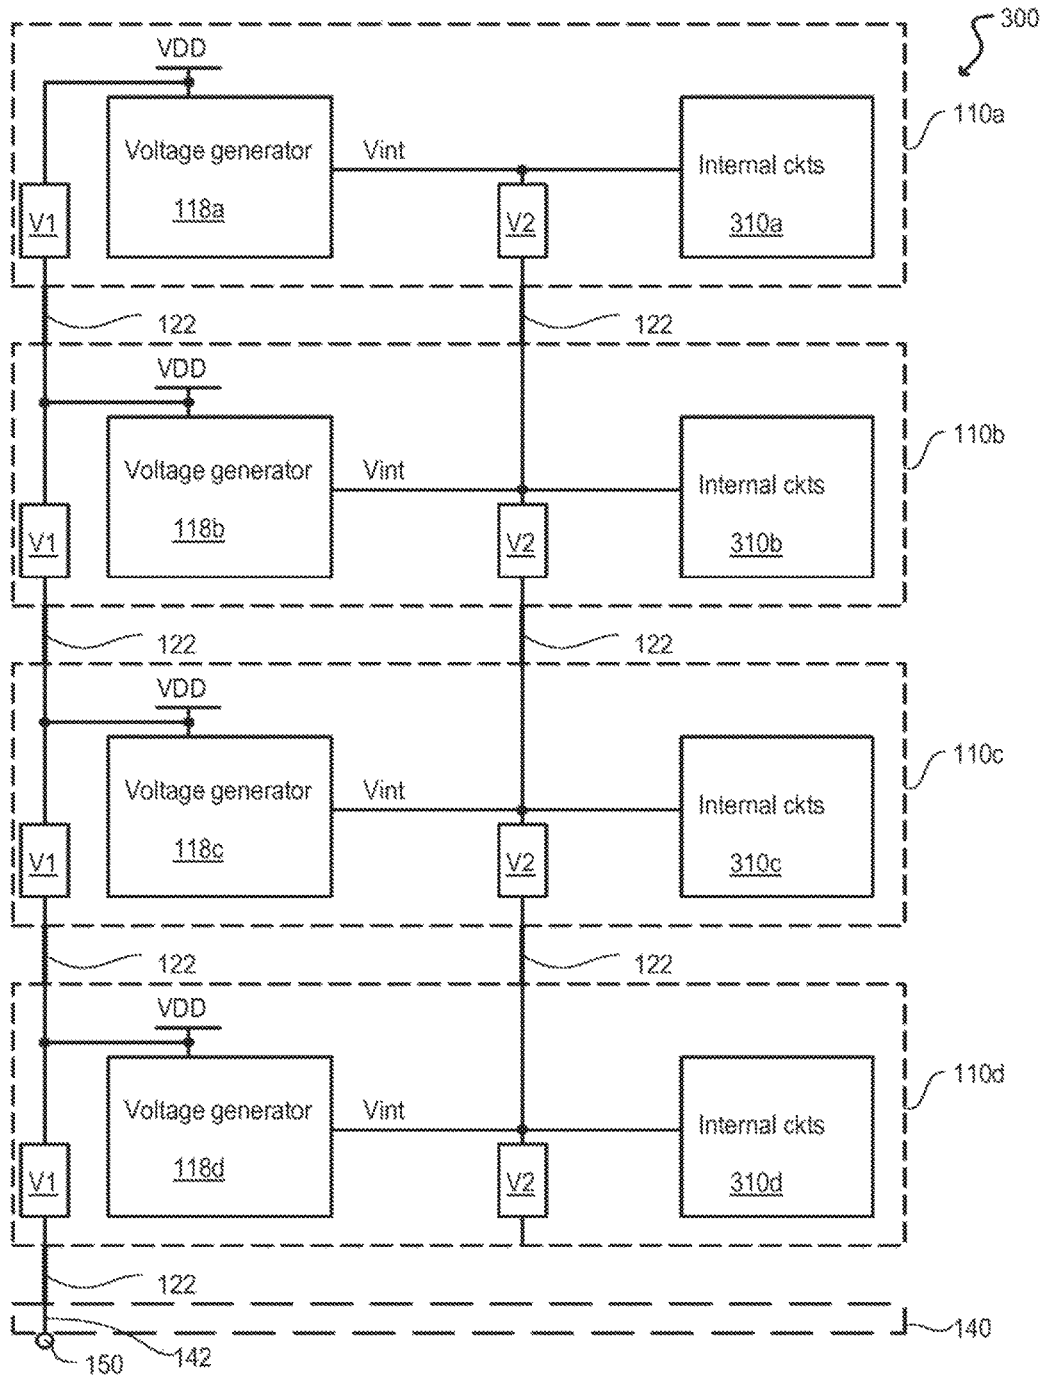


FIG. 3

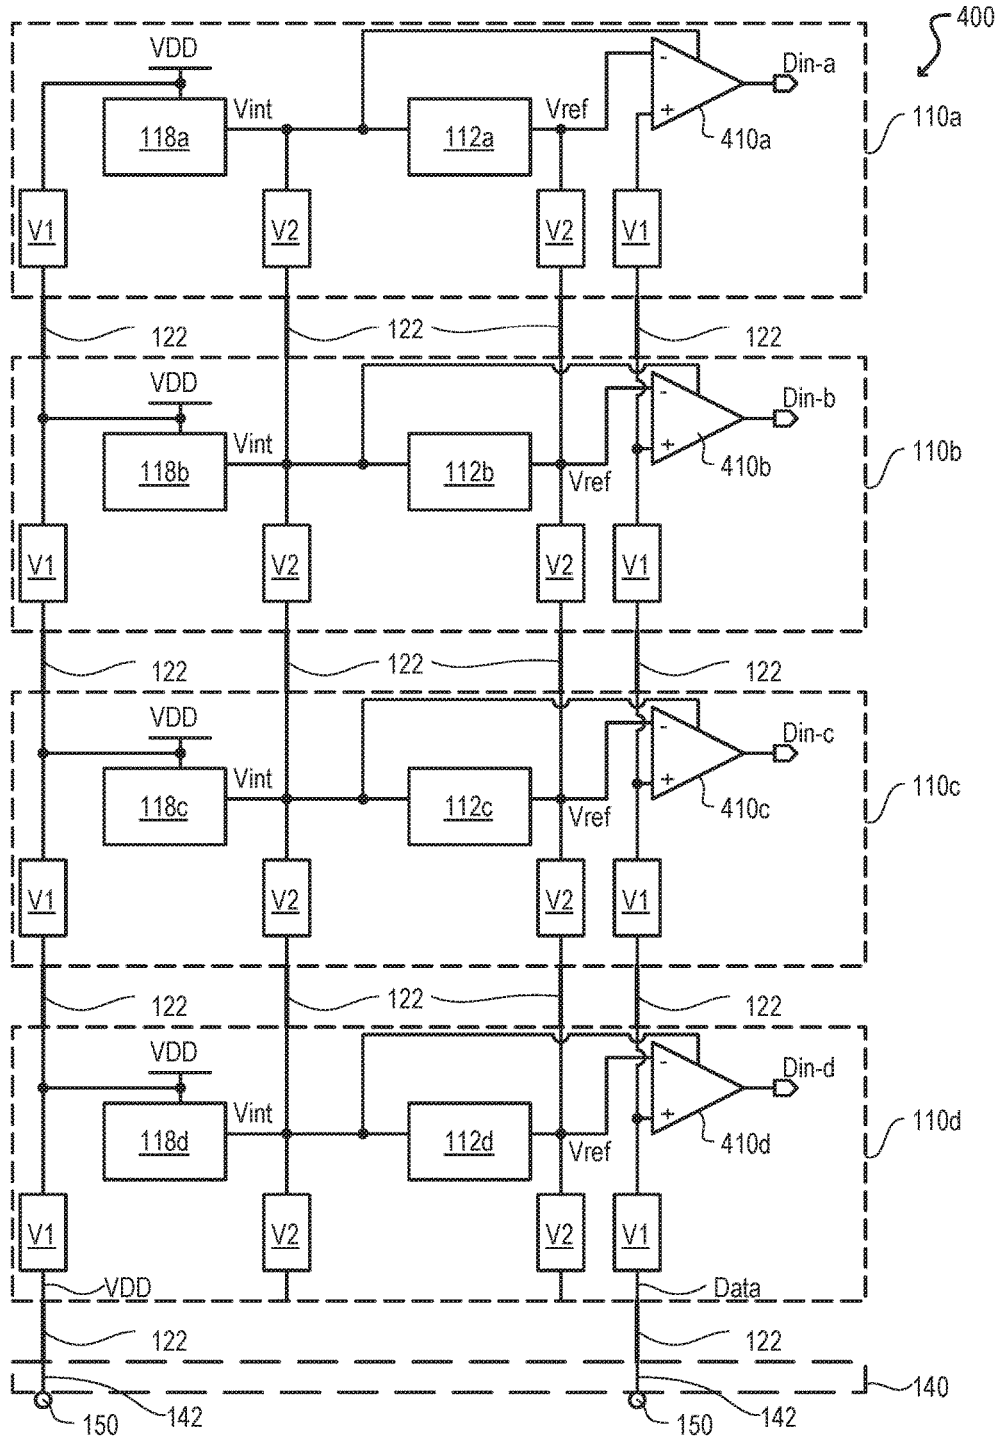


FIG. 4

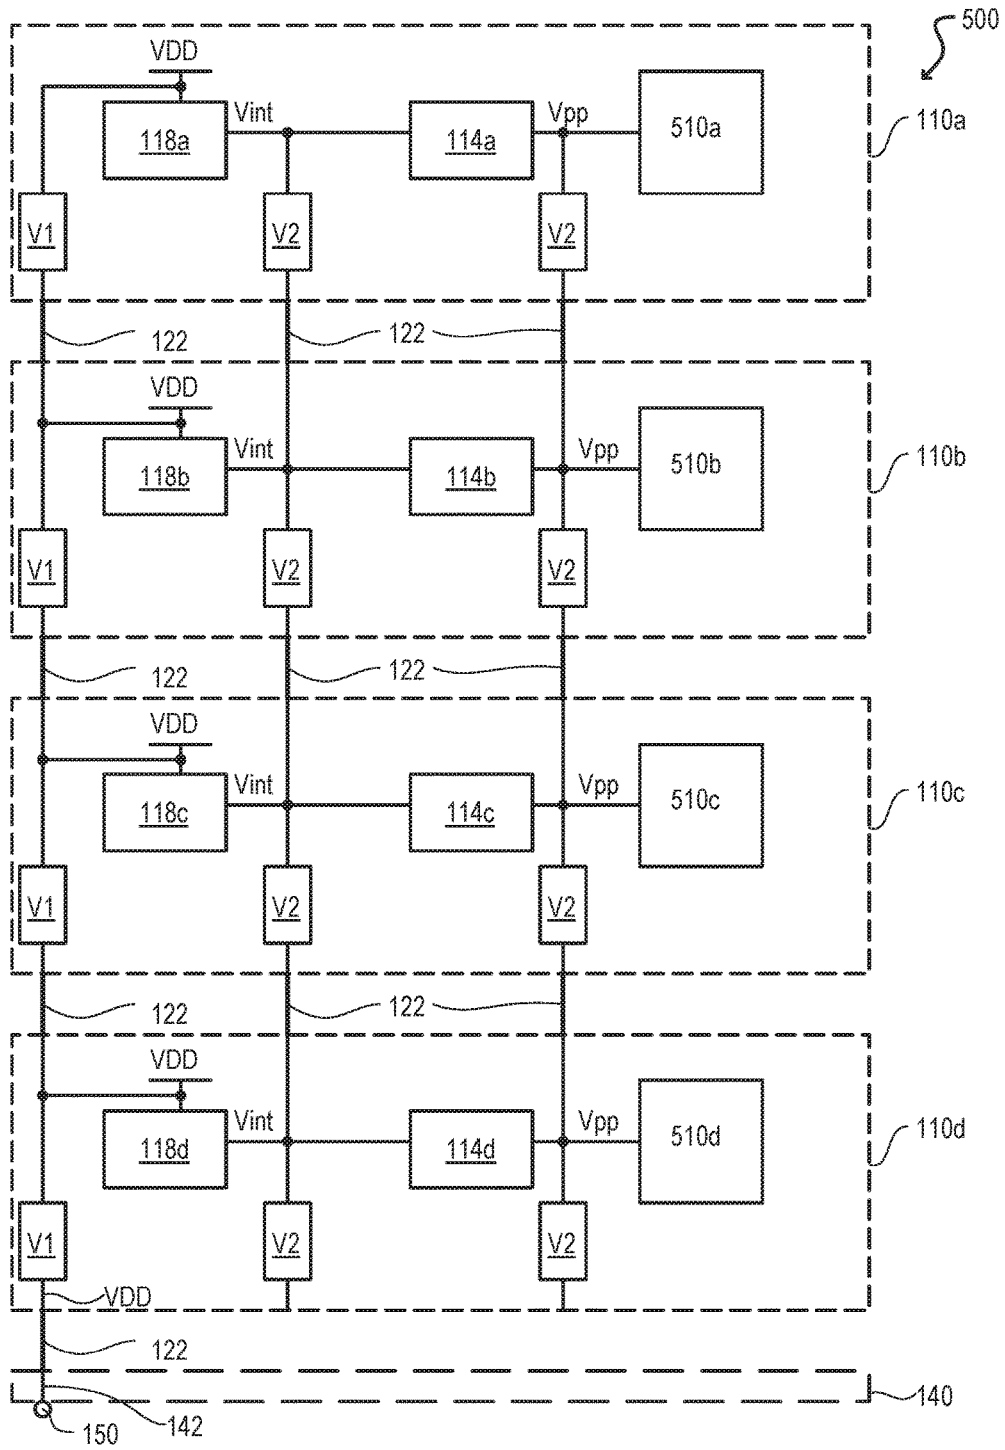


FIG. 5

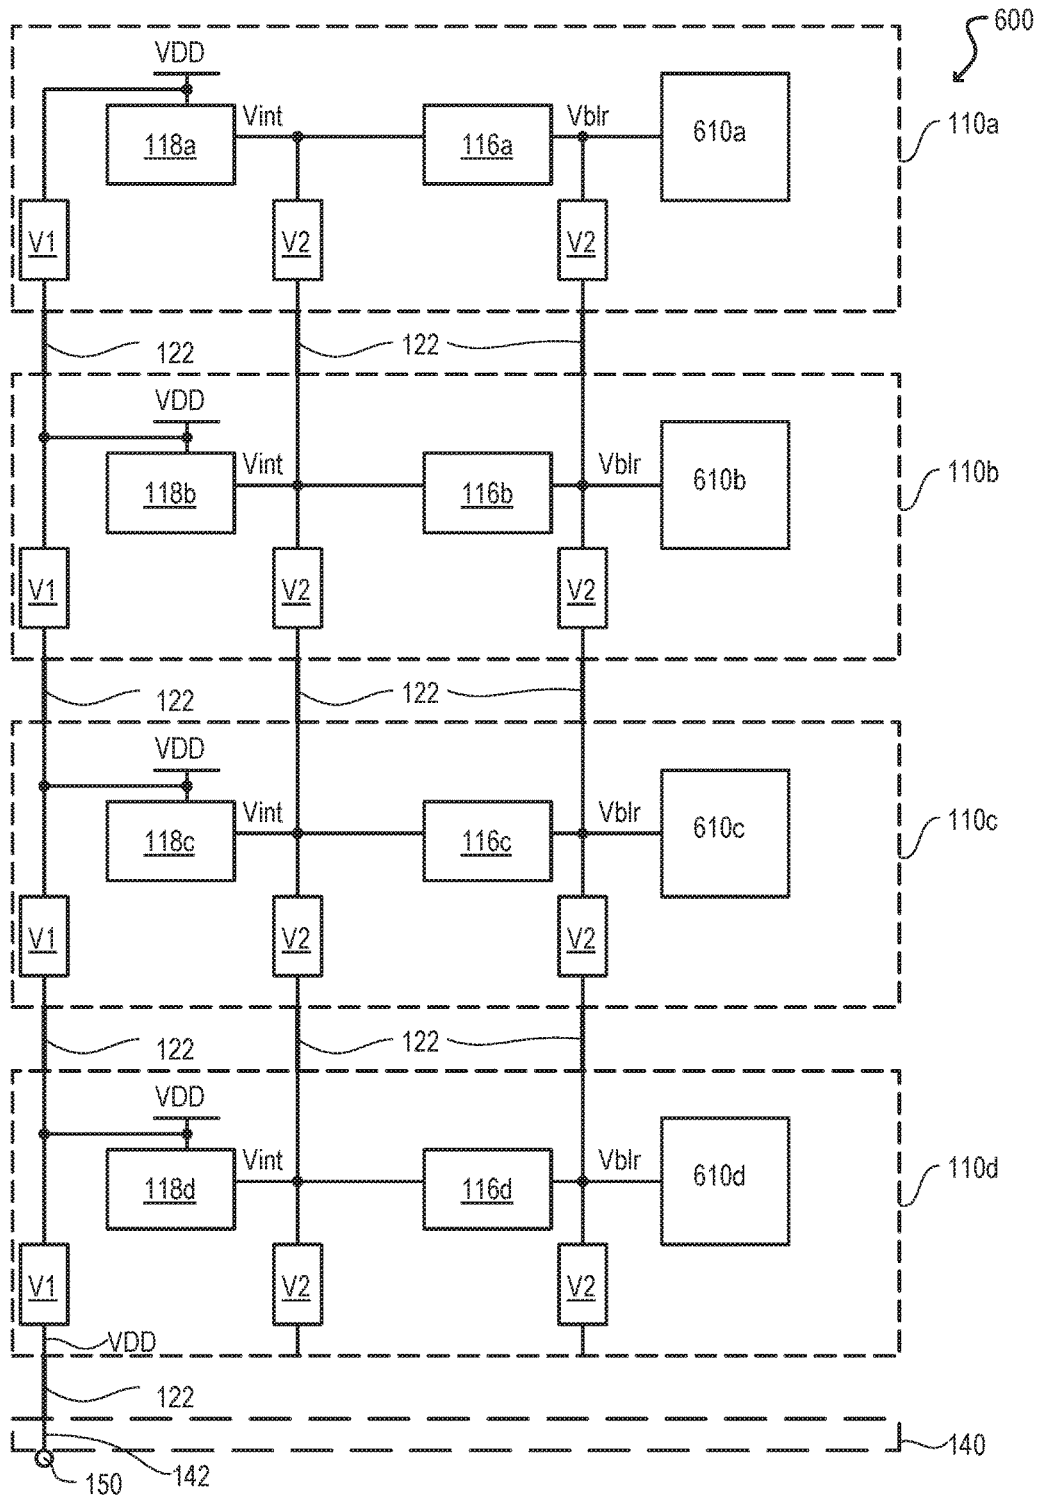


FIG. 6

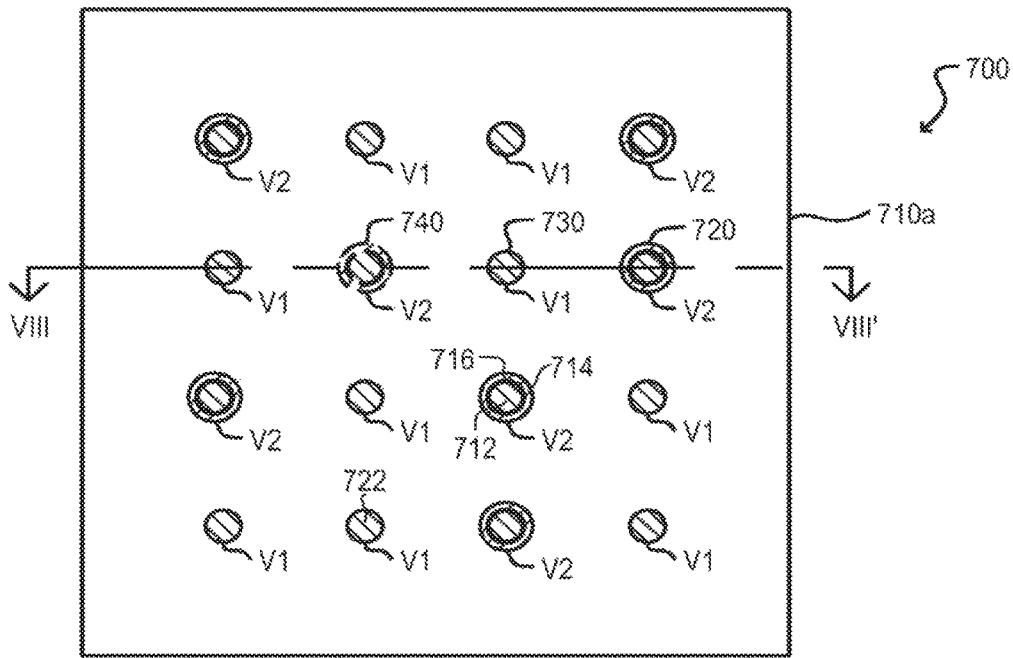


FIG. 7

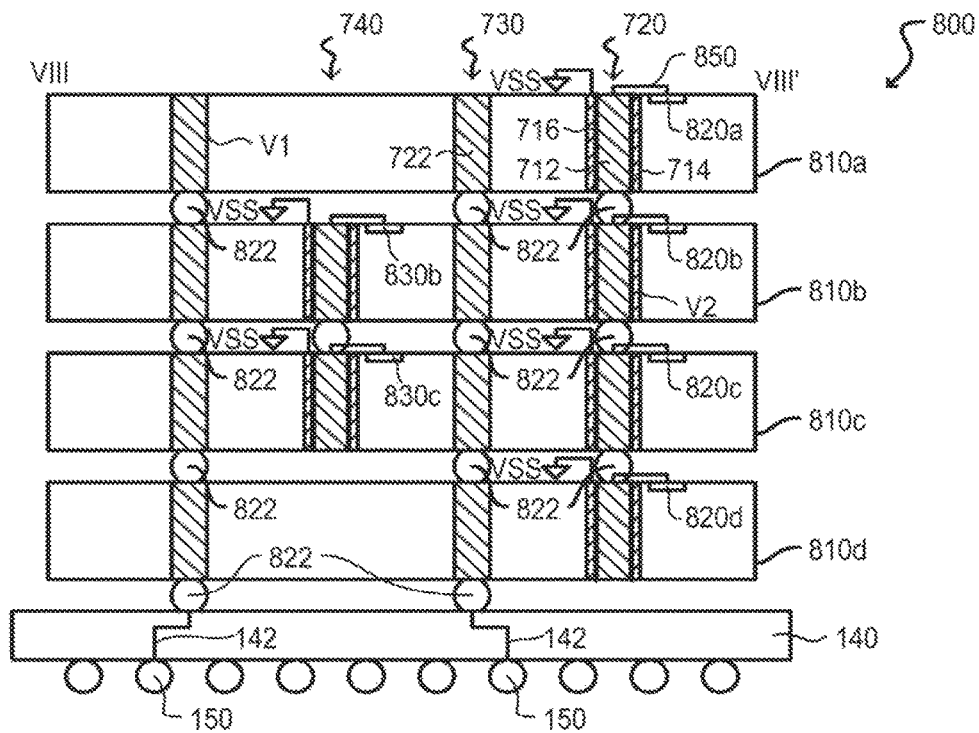
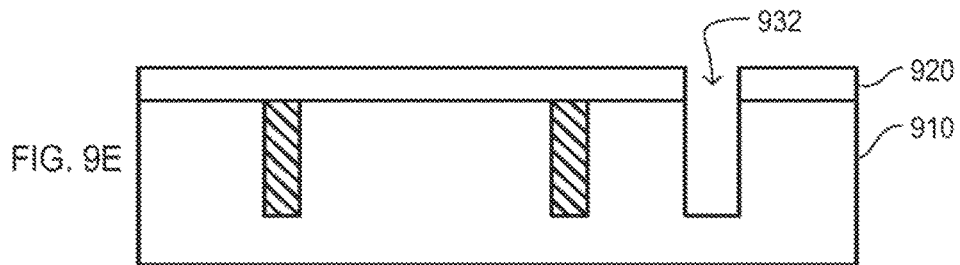
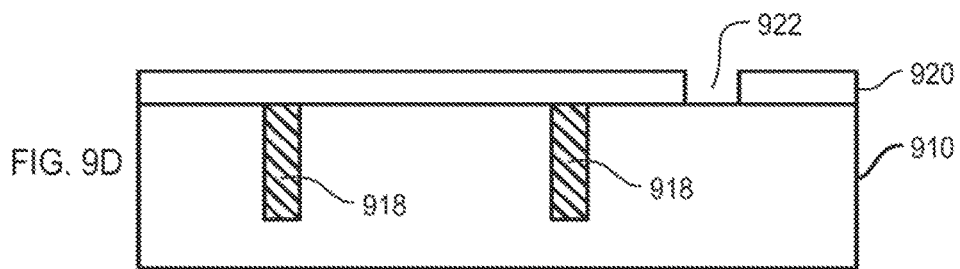
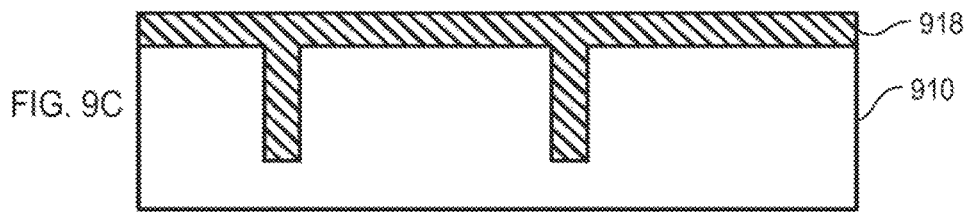
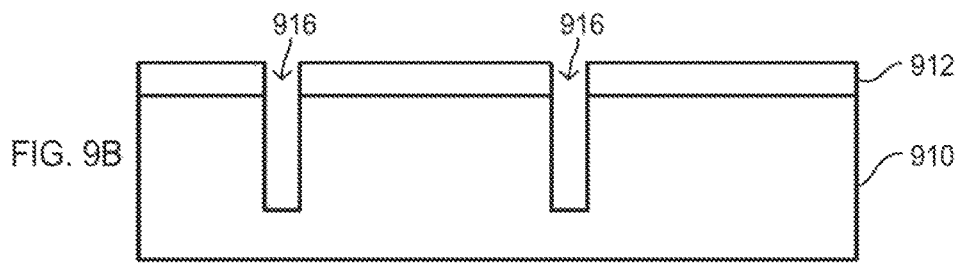
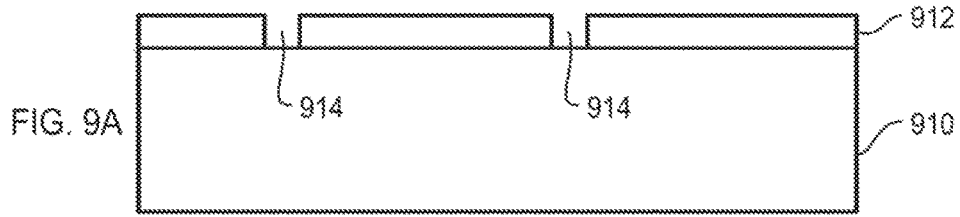
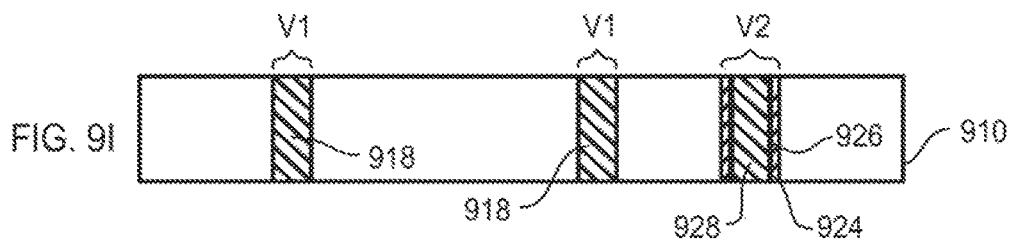
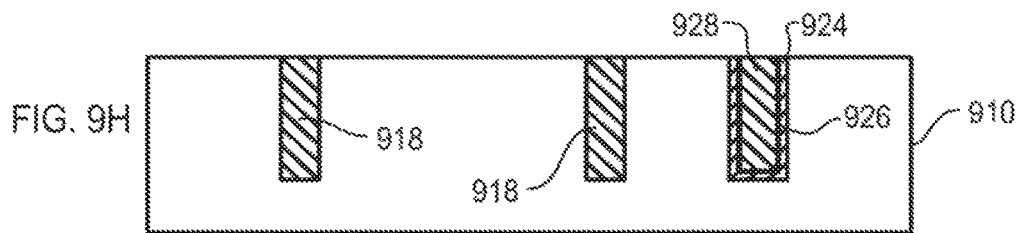
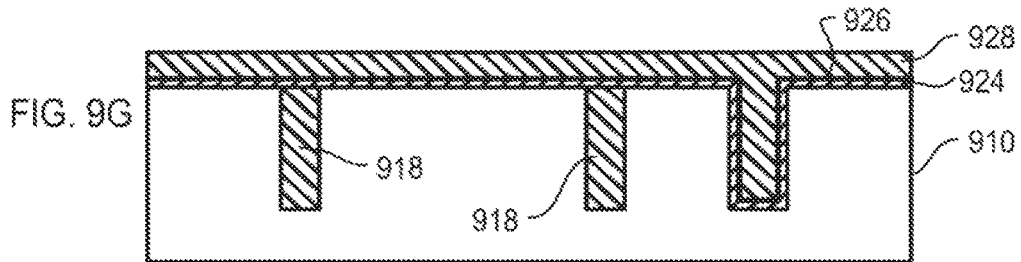
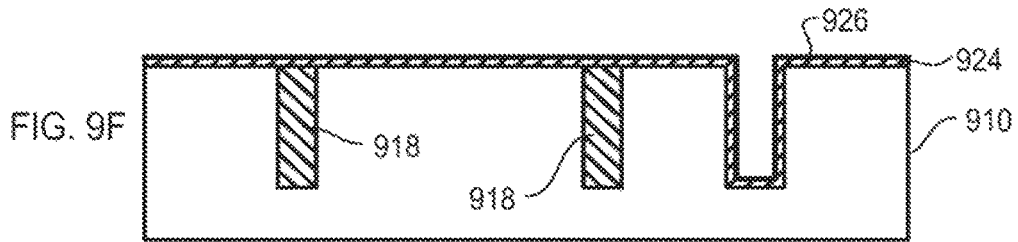


FIG. 8







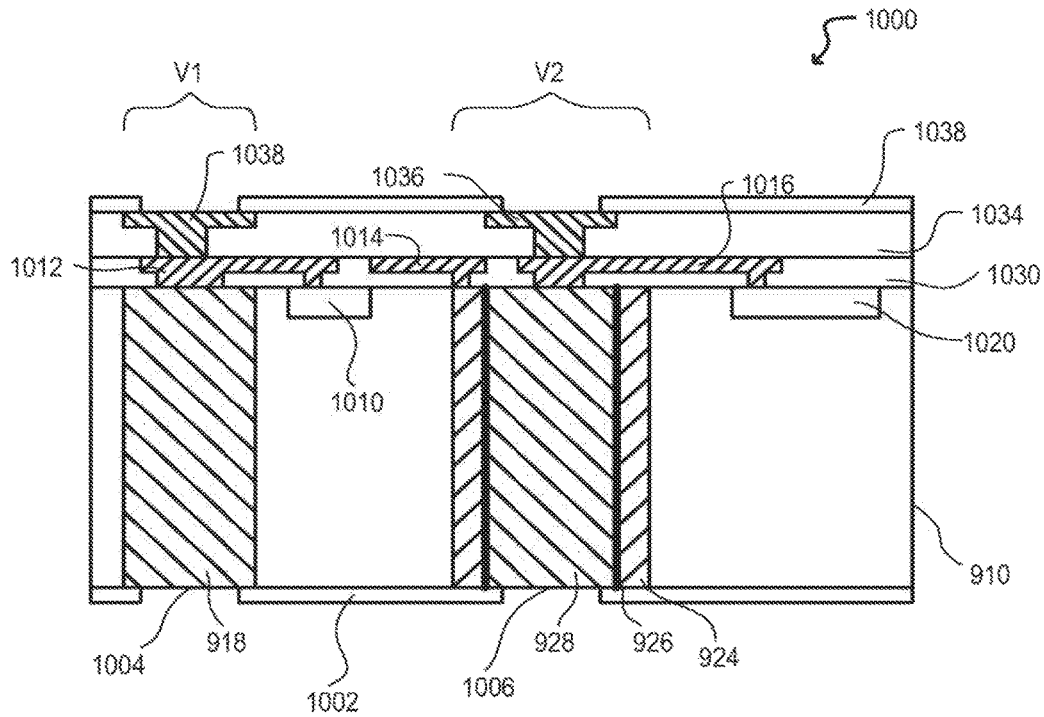


FIG. 10

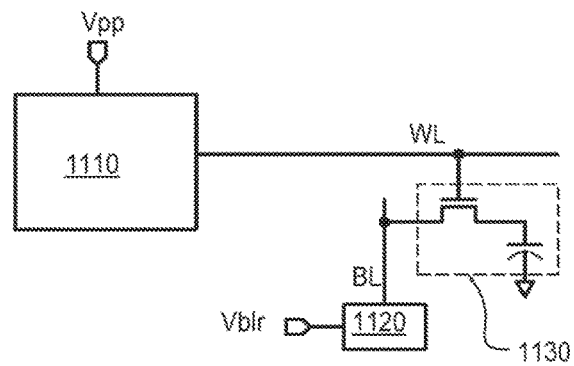


FIG. 11

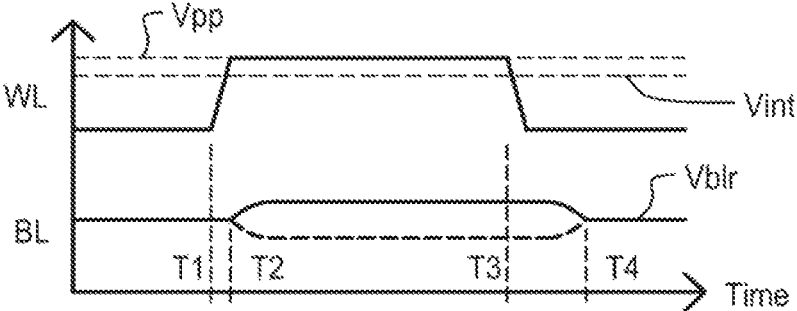


FIG. 12

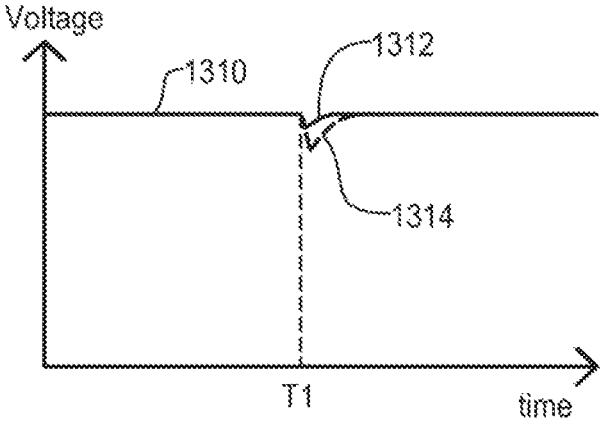


FIG. 13

1

**PACKAGE INCLUDING A PLURALITY OF  
STACKED SEMICONDUCTOR DEVICES, AN  
INTERPOSER AND INTERFACE  
CONNECTIONS**

PRIORITY CLAIMS

This application is a continuation of U.S. patent application Ser. No. 15/934,183, filed Mar. 23, 2018, which is a continuation of U.S. patent application Ser. No. 15/836,851, filed Dec. 9, 2017, issued as U.S. Pat. No. 9,929,127, which is a continuation of U.S. patent application Ser. No. 15/626,534 filed Jun. 19, 2017, issued as U.S. Pat. No. 9,842,830, which is a continuation of U.S. patent application Ser. No. 15/469,448 filed Mar. 24, 2017, issued as U.S. Pat. No. 9,685,427, which is a continuation of U.S. patent application Ser. No. 15/357,829 filed Nov. 21, 2016, issued as U.S. Pat. No. 9,607,969, which is a continuation of U.S. patent application Ser. No. 15/245,563 filed Aug. 24, 2016, issued as U.S. Pat. No. 9,508,692, which is a continuation of U.S. patent application Ser. No. 15/161,468 filed May 23, 2016, issued as U.S. Pat. No. 9,431,088, which is a continuation of U.S. patent application Ser. No. 14/755,157 filed Jun. 30, 2015, issued as U.S. Pat. No. 9,378,778, which claims the benefit of U.S. Provisional Patent Application Ser. No. 62/175,352, filed Jun. 14, 2015, the contents all of which are incorporated by reference herein.

TECHNICAL FIELD

The present invention relates generally to a multi-chip semiconductor device, and more particularly to conductive connections within a multi-chip semiconductor device.

BACKGROUND OF THE INVENTION

Multi-chip semiconductor packages can include reference voltages and power supply voltages generated on each semiconductor device. Such supplies may be susceptible to independent noise and/or current loads for each semiconductor device which can cause reference voltages and power supply voltages to greatly vary between devices.

In light of the above, it would be desirable to provide a method of generating power supply voltages and/or reference voltages that can be consistent among each semiconductor device in a multi-chip semiconductor device to improve reliability.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a package including a plurality of semiconductor devices according to an embodiment.

FIG. 2A is a circuit schematic diagram of a through via according to an embodiment.

FIG. 2B is a circuit schematic diagram of a capacitance enhanced through via according to an embodiment.

FIG. 3 is a block diagram of a package including a plurality of semiconductor devices according to an embodiment.

FIG. 4 is a block diagram of a package including a plurality of semiconductor devices according to an embodiment.

FIG. 5 is a block diagram of a package including a plurality of semiconductor devices according to an embodiment.

2

FIG. 6 is a block diagram of a package including a plurality of semiconductor devices according to an embodiment.

FIG. 7 is a top plan view of a package including a plurality of semiconductor devices according to an embodiment.

FIG. 8 is a cross sectional diagram of a package including a plurality of semiconductor devices according to an embodiment.

FIGS. 9A to 9I are cross-sectional diagrams of a semiconductor device at various process steps of forming through vias and capacitance enhanced through vias according to an embodiment.

FIG. 10 is a cross-section diagram of a semiconductor device including through vias and capacitance enhanced through vias according to an embodiment.

FIG. 11 is a circuit schematic diagram of a portion of a memory array circuit according to an embodiment.

FIG. 12 is a waveform diagram illustrating the operation of the memory array circuits according to an embodiment.

FIG. 13 is a waveform diagram illustrating a signal with a substantially stable voltage according to an embodiment.

DETAILED DESCRIPTION OF THE  
EMBODIMENTS

According to the embodiments set forth below, a package may include a plurality of semiconductor devices (chips). Each chip may include through vias (through silicon vias—TSV) that can provide an electrical connection between chips and between chips and external connections, such as solder connections or solder balls. The through vias may include capacitance enhanced through vias which may have a capacitance value at least an order of magnitude greater than the non-capacitance enhanced through vias. The capacitance enhanced through vias may be used to route common reference potentials and/or power supply potentials between a plurality of the semiconductor devices. In this way, each semiconductor device may commonly provide current drive for the common reference potentials and/or power supply potentials. Additionally, the capacitance enhanced through vias may include an increased capacitance value which can provide charge storage to provide an instant current to the common reference potential and or power supply potential. In this way, common reference potentials and/or power supply potentials may have reduced noise.

Referring now to FIG. 1, a package including a plurality of semiconductor devices according to an embodiment is set forth in a schematic diagram and given the general reference character **100**.

The package **100** can include semiconductor devices (**110a**, **110b**, **110c**, and **110d**) stacked vertically. Each semiconductor device (**110a**, **110b**, **110c**, and **110d**) can include through vias **V1** for providing an electrical connection between circuitry and an external connection **150** on a bottom surface of package **100**. Through vias **V1** can be formed to provide an electrical connection from a front side of a respective semiconductor device (**110a**, **110b**, **110c**, and **110d**) to a back side of the respective semiconductor device (**110a**, **110b**, **110c**, and **110d**).

Each semiconductor device (**110a**, **110b**, **110c**, and **110d**) may also include capacitance enhanced through vias **V2** for providing an electrical connection to commonly connected reference potentials and/or power supply potentials between the semiconductor devices (**110a**, **110b**, **110c**, and **110d**) from a front side to a back side of the respective semiconductor device (**110a**, **110b**, **110c**, and **110d**). Each semiconductor device (**110a**, **110b**, **110c**, and **110d**) may include

reference voltage generating circuitry and internal power supply generating circuitry. Semiconductor device **110a** may include a reference voltage generator circuit **112a** for generating a reference voltage  $V_{ref}$ , a power supply voltage generator circuit **114a** for generating a boosted power supply voltage  $V_{pp}$ , a reference voltage generator circuit **116a** for generating a bit line reference voltage  $V_{blr}$ , and an internal power supply voltage generator circuit **118a** for generating an internal power supply voltage  $V_{int}$ . Semiconductor device **110b** may include a reference voltage generator circuit **112b** for generating a reference voltage  $V_{ref}$ , a power supply voltage generator circuit **114b** for generating a boosted power supply voltage  $V_{pp}$ , a reference voltage generator circuit **116b** for generating a bit line reference voltage  $V_{blr}$ , and an internal power supply voltage generator circuit **118b** for generating an internal power supply voltage  $V_{int}$ . Semiconductor device **110c** may include a reference voltage generator circuit **112c** for generating a reference voltage  $V_{ref}$ , a power supply voltage generator circuit **114c** for generating a boosted power supply voltage  $V_{pp}$ , a reference voltage generator circuit **116c** for generating a bit line reference voltage  $V_{blr}$ , and an internal power supply voltage generator circuit **118c** for generating an internal power supply voltage  $V_{int}$ . Semiconductor device **110d** may include a reference voltage generator circuit **112d** for generating a reference voltage  $V_{ref}$ , a power supply voltage generator circuit **114d** for generating a boosted power supply voltage  $V_{pp}$ , a reference voltage generator circuit **116d** for generating a bit line reference voltage  $V_{blr}$ , and an internal power supply voltage generator circuit **118d** for generating an internal power supply voltage  $V_{int}$ .

Interface connections **122** may be formed in regions (**120a**, **120b**, and **120c**) between adjacent semiconductor devices (**110a-110b**, **110b-110c**, and **110c-110d**) to provide electrical connections between respective through vias **V1** and between respective capacitance enhanced through vias **V2** of adjacent semiconductor devices (**110a-110b**, **110b-110c**, and **110c-110d**). Interface connections **122** may also be formed in a region **120d** between semiconductor device **110d** and an interposer **140**. Interface connections **122** may include solder connections, such as solder balls and/or copper pillars, or the like.

Capacitance enhanced through vias **V2** can each include a capacitor formed inside a through hole in which the via resides.

Reference voltage generator circuit **112a** can generate a reference voltage  $V_{ref}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **112b** can generate a reference voltage  $V_{ref}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **112c** can generate a reference voltage  $V_{ref}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **112d** can generate a reference voltage  $V_{ref}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**.

Interface connections **122** may electrically connect all capacitance enhanced through vias **V2** carrying the reference voltage  $V_{ref}$  between semiconductor devices (**110a**, **110b**, **110c**, and **110d**). In this way, each reference voltage generator circuit (**112a**, **112b**, **112c**, and **112d**) may provide drive for a common reference voltage  $V_{ref}$  and additionally, the reference voltage  $V_{ref}$  may have an essentially matching potential between each semiconductor device (**110a**, **110b**, **110c**, and **110d**). Also, because capacitance enhanced

through vias **V2** have a substantially large capacitance value than a normal through via **V1**, a source for charge supply to circuitry receiving the reference voltage circuit  $V_{ref}$  may be provided to reduce noise on the reference voltage  $V_{ref}$ .

Power supply voltage generator circuit **114a** can generate a boosted power supply voltage  $V_{pp}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Power supply voltage generator circuit **114b** can generate a boosted power supply voltage  $V_{pp}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Power supply voltage generator circuit **114c** can generate a boosted power supply voltage  $V_{pp}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Power supply voltage generator circuit **114d** can generate a boosted power supply voltage  $V_{pp}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**.

Interface connections **122** may electrically connect all capacitance enhanced through vias **V2** carrying the boosted power supply voltage  $V_{pp}$  between semiconductor devices (**110a**, **110b**, **110c**, and **110d**). In this way, each power supply voltage generator circuit (**114a**, **114b**, **114c**, and **114d**) may provide drive for a common boosted power supply voltage  $V_{pp}$  and additionally, the boosted power supply voltage  $V_{pp}$  may have an essentially matching potential between each semiconductor device (**110a**, **110b**, **110c**, and **110d**). Also, because capacitance enhanced through vias **V2** have a substantially large capacitance value than a normal through via **V1**, a source for charge supply to circuitry receiving the boosted power supply voltage  $V_{pp}$  may be provided to reduce noise on the boosted power supply voltage  $V_{pp}$ .

Reference voltage generator circuit **116a** can generate a bit line reference voltage  $V_{blr}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **116b** can generate a bit line reference voltage  $V_{blr}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **116c** can generate a bit line reference voltage  $V_{blr}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Reference voltage generator circuit **116d** can generate a bit line reference voltage  $V_{blr}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**.

Interface connections **122** may electrically connect all capacitance enhanced through vias **V2** carrying the bit line reference voltage  $V_{blr}$  between semiconductor devices (**110a**, **110b**, **110c**, and **110d**). In this way, each reference voltage generator circuit (**116a**, **116b**, **116c**, and **116d**) may provide drive for a common bit line reference voltage  $V_{blr}$  and additionally, the bit line reference voltage  $V_{blr}$  may have an essentially matching potential between each semiconductor device (**110a**, **110b**, **110c**, and **110d**). Also, because capacitance enhanced through vias **V2** have a substantially large capacitance value than a normal through via **V1**, a source for charge supply to circuitry receiving the bit line reference voltage  $V_{blr}$  may be provided to reduce noise on the bit line reference voltage  $V_{blr}$ .

Internal power supply voltage generator circuit **118a** can generate an internal power supply voltage  $V_{int}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Internal power supply voltage generator circuit **118b** can generate an internal power supply voltage  $V_{int}$  which can be electrically connected with wiring layers to a capacitance enhanced through via **V2**. Internal power supply voltage generator circuit **118c** can generate an

internal power supply voltage  $V_{int}$  which can be electrically connected with wiring layers to a capacitance enhanced through via V2. Internal power supply voltage generator circuit 118d can generate an internal power supply voltage  $V_{int}$  which can be electrically connected with wiring layers to a capacitance enhanced through via V2.

Interface connections 122 may electrically connect all capacitance enhanced through vias V2 carrying the internal power supply voltage  $V_{int}$  between semiconductor devices (110a, 110b, 110c, and 110d). In this way, each internal power supply voltage generator circuit (118a, 118b, 118c, and 118d) may provide drive for a common internal power supply voltage  $V_{int}$  and additionally, the internal power supply voltage  $V_{int}$  may have an essentially matching potential between each semiconductor device (110a, 110b, 110c, and 110d). Also, because capacitance enhanced through vias V2 have a substantially large capacitance value than a normal through via V1, a source for charge supply to circuitry receiving the internal power supply voltage  $V_{int}$  may be provided to reduce noise on the internal power supply voltage  $V_{int}$ .

Signals and voltages that are provided to/from the package 100 and external connections 150 may be electrically connected to through vias V1 by way of wiring 142 formed in interposer 140 and interface connections 122 formed in regions (120a to 120d). Signals and voltages can include a power supply voltage VDD, control signals CTL, and data signals DATA.

Through vias V1 may provide an electrical connection for signals that may transition between logic states, such as control signals CTL and data signals DATA. Capacitance enhanced through vias V2 may provide an electrical connection from a first side to a second side of the respective semiconductor device for transmission of signals that remain substantially stable such as reference voltages ( $V_{ref}$  and  $V_{blr}$ ), power supply voltages ( $V_{int}$  and  $V_{pp}$ ) or the like. In this way, noise may be reduced and a reservoir of charge for circuits that provide a load for reference voltages and/or power supply voltages may be provided.

Referring now to FIG. 2A, a circuit schematic diagram of a through via V1 according to an embodiment is set forth. Through via V1 can include a wiring layer 210 having first and second terminals (212 and 214). The wiring layer 210 may also have a parasitic capacitance  $C_{par}$ . The parasitic capacitance  $C_{par}$  may essentially be a capacitance formed from the wiring layer 210 to a substrate of a semiconductor device. It may be desirable for parasitic capacitance  $C_{par}$  to be as small as possible so that signals may be transmitted and transition as fast as possible and current consumption may be reduced.

Referring now to FIG. 2B, a circuit schematic diagram of a capacitance enhanced through via V2 according to an embodiment is set forth. Capacitance enhanced through via V2 can include a wiring layer 220 having first and second terminals (222 and 224). The wiring layer 210 may also have a capacitance  $C_{ev}$ . The capacitance  $C_{ev}$  may be a capacitance formed using the wiring layer 220 as a first capacitor terminal and a second conductor layer as a second capacitor terminal. The wiring layer 220 and the conductor layer may be separated by a thin dielectric layer. The conductor layer may be connected to a ground potential VSS. In this way, capacitance  $C_{ev}$  of capacitance enhanced through via V2 may have a capacitance value that is substantially greater than parasitic capacitance  $C_{par}$  of through via V1. In particular, the capacitance value of capacitance  $C_{ev}$  of capacitance enhanced through via V2 may be at least an order of

magnitude (i.e.  $10\times$ ) greater than the capacitance value of parasitic capacitance  $C_{par}$  of through via V1.

Referring now to FIG. 3, a package including a plurality of semiconductor devices according to an embodiment is set forth in a block schematic diagram and given the general reference character 300. Package 300 can include similar constituents as package 100 of FIG. 1, such constituents may be referred to by the same reference character. FIG. 3 illustrates aspects of internal power supply voltage generator circuits (118a to 118d) for package 100 of FIG. 1.

Package 300 can include semiconductor devices (110a, 110b, 110c, and 110d) and an interposer 140. Semiconductor device 110a may include through vias V1, capacitance enhanced through vias V2, an internal power supply voltage generator circuit 118a, and internal circuits 310a. Internal power supply voltage generator 118a can be electrically connected to receive a power supply voltage VDD from through via V1 and may provide an internal power supply voltage  $V_{int}$  as an output. Internal circuits 310a may be electrically connected to receive internal power supply voltage  $V_{int}$ . Internal power supply voltage  $V_{int}$  may be electrically connected to capacitance enhanced through via V2. Semiconductor device 110b may include through vias V1, capacitance enhanced through vias V2, an internal power supply voltage generator circuit 118b, and internal circuits 310b. Voltage generator circuit 118b can be electrically connected to receive a power supply voltage VDD from through via V1 and may provide an internal power supply voltage  $V_{int}$  as an output. Internal circuits 310b may be electrically connected to receive internal power supply voltage  $V_{int}$ . Internal power supply voltage  $V_{int}$  may be electrically connected to capacitance enhanced through via V2. Semiconductor device 110c may include through vias V1, capacitance enhanced through vias V2, an internal power supply voltage generator 118c, and internal circuits 310c. Internal power supply voltage generator circuit 118c can be electrically connected to receive a power supply voltage VDD from through via V1 and may provide an internal power supply voltage  $V_{int}$  as an output. Internal circuits 310c may be electrically connected to receive internal power supply voltage  $V_{int}$ . Internal power supply voltage  $V_{int}$  may be electrically connected to capacitance enhanced through via V2. Semiconductor device 110d may include through vias V1, capacitance enhanced through vias V2, an internal power supply voltage generator circuit 118d, and internal circuits 310d. Internal power supply voltage generator circuit 118d can be electrically connected to receive a power supply voltage VDD from through via V1 and may provide an internal power supply voltage  $V_{int}$  as an output. Internal circuits 310d may be electrically connected to receive internal power supply voltage  $V_{int}$ . Internal power supply voltage  $V_{int}$  may be electrically connected to capacitance enhanced through via V2.

Package 300 may receive power supply voltage VDD, externally from an external connection 150. Only one external connection 150 is illustrated to avoid unduly cluttering up the figure. Power supply voltage VDD may be electrically connected to respective internal power supply voltage generator circuits (118a, 118b, 118c, and 118d) by way of wiring 142 through interposer 140, interface connections 122, and through vias V1.

Internal power supply voltage generator circuits (118a, 118b, 118c, and 118d) may operate to collectively and in parallel provide a commonly connected internal power supply voltage  $V_{int}$ . Internal power supply voltage  $V_{int}$  may be commonly connected by way of interface connections 122 and capacitance enhanced through vias V2. By commonly

generating and commonly connecting internal power supply voltage  $V_{int}$  using internal power supply voltage generator circuits (**118a**, **118b**, **118c**, and **118d**), each internal power supply voltage generator circuit (**118a**, **118b**, **118c**, and **118d**) may be made smaller (i.e. lower drive strength) than in conventional semiconductor devices because each internal power supply voltage generator circuit (**118a**, **118b**, **118c**, and **118d**) may only provide a portion of the current required by an active internal circuit.

Because internal circuits (**310a**, **310b**, **310c**, and **310d**) are commonly electrically connected to receive internal power supply voltage  $V_{int}$ , the load may be distributed.

Due to increased capacitance value of capacitance enhanced through vias **V2** electrically connected to receive and transmit internal power supply voltage  $V_{int}$ , essentially instantaneous charge may be locally available for each semiconductor device (**110a**, **110b**, **110c**, and **110d**) and noise may be reduced and/or attenuated.

Referring now to FIG. 4, a package including a plurality of semiconductor devices according to an embodiment is set forth in a block schematic diagram and given the general reference character **400**. Package **400** can include similar constituents as package **100** of FIG. 1, such constituents may be referred to by the same reference character. FIG. 4 illustrates aspects of internal power supply voltage generator circuits (**112a** to **112d**) and reference voltage generator circuits (**112a** to **112d**) for package **100** of FIG. 1.

Package **400** can include semiconductor devices (**110a**, **110b**, **110c**, and **110d**). Each semiconductor device (**110a** to **110d**) can respectively include internal power supply voltage generator circuits (**118a** to **118d**) arranged as discussed above with respect to package **300** of FIG. 3. Each semiconductor device (**110a** to **110d**) can respectively include a respective reference voltage generator circuit (**112a** to **112d**) and input buffer circuit (**410a** to **410d**).

In semiconductor device **110a**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator **112a**. Reference voltage generator circuit **112a** can provide a reference voltage  $V_{ref}$ . An input buffer circuit **410a** may receive reference voltage  $V_{ref}$  at a first input terminal (a negative input terminal). Input buffer circuit **410a** may receive a data signal **DATA** at a second input terminal (a positive input terminal). Data signal **DATA** may be provided externally from an external connection **150** and through electrical connection **142**, interface connections **122** and through vias **V1**. Input buffer circuit **410a** may provide a data signal **Din-a** as an output.

In semiconductor device **110b**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator **112b**. Reference voltage generator circuit **112b** can provide a reference voltage  $V_{ref}$ . An input buffer circuit **410b** may receive reference voltage  $V_{ref}$  at a first input terminal (a negative input terminal). Input buffer circuit **410b** may receive a data signal **DATA** at a second input terminal (a positive input terminal). Data signal **DATA** may be provided externally from an external connection **150** and through electrical connection **142**, interface connections **122** and through vias **V1**. Input buffer circuit **410b** may provide a data signal **Din-b** as an output.

In semiconductor device **110c**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator circuit **112c**. Reference voltage generator circuit **112c** can provide a reference voltage  $V_{ref}$ . An input buffer circuit **410c** may receive reference voltage  $V_{ref}$  at a first input terminal (a negative input terminal). Input buffer circuit **410c** may receive a data signal **DATA** at a second input terminal (a positive input terminal). Data signal **DATA** may

be provided externally from an external connection **150** and through electrical connection **142**, interface connections **122** and through vias **V1**. Input buffer circuit **410c** may provide a data signal **Din-c** as an output.

In semiconductor device **110d**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator **112d**. Reference voltage generator circuit **112d** can provide a reference voltage  $V_{ref}$ . An input buffer circuit **410d** may receive reference voltage  $V_{ref}$  at a first input terminal (a negative input terminal). Input buffer circuit **410d** may receive a data signal **DATA** at a second input terminal (a positive input terminal). Data signal **DATA** may be provided externally from an external connection **150** and through electrical connection **142**, interface connections **122** and through vias **V1**. Input buffer circuit **410d** may provide a data signal **Din-d** as an output.

Reference voltage generator circuits (**112a**, **112b**, **112c**, and **112d**) may operate to collectively and in parallel provide a commonly connected reference voltage  $V_{ref}$ . Reference voltage  $V_{ref}$  may be commonly connected by way of interface connections **122** and capacitance enhanced through vias **V2**. By commonly generating and commonly connecting reference voltage  $V_{ref}$  using reference voltage generator circuits (**112a**, **112b**, **112c**, and **112d**), each reference voltage generator circuit (**112a**, **112b**, **112c**, and **112d**) may be made smaller (i.e. lower drive strength) than in conventional semiconductor devices because each reference voltage generator circuit (**112a**, **112b**, **112c**, and **112d**) may only provide a portion of the current required by an active internal circuit.

Because input buffer circuits (**410a**, **410b**, **410c**, and **410d**) are commonly electrically connected to receive reference voltage  $V_{ref}$  and data signal **DATA**, input levels of data signal **DATA** may be read consistently among the different semiconductor devices (**110a**, **110b**, **110c**, and **110d**). In this way, input noise margin levels may be improved and data reliability may be improved.

Due to increased capacitance value of capacitance enhanced through vias **V2** electrically connected to receive and transmit reference voltage  $V_{int}$ , essentially instantaneous charge may be locally available for each semiconductor device (**110a**, **110b**, **110c**, and **110d**) and noise may be reduced and/or attenuated.

Referring now to FIG. 5, a package including a plurality of semiconductor devices according to an embodiment is set forth in a block schematic diagram and given the general reference character **500**. Package **500** can include similar constituents as package **100** of FIG. 1, such constituents may be referred to by the same reference character. FIG. 5 illustrates aspects of power supply voltage generator circuits (**114a** to **114d**) and power supply voltage generator circuits (**114a** to **114d**) for package **100** of FIG. 1.

Package **500** can include semiconductor devices (**110a**, **110b**, **110c**, and **110d**). Each semiconductor device (**110a** to **110d**) can respectively include voltage generator circuits (**118a** to **118d**) arranged as discussed above with respect to package **300** of FIG. 3. Each semiconductor device (**110a** to **110d**) can respectively include a power supply voltage generator circuit (**114a** to **114d**) and memory array circuits (**510a** to **510d**).

In semiconductor device **110a**, internal power supply voltage  $V_{int}$  may be provided to power supply voltage generator circuit **114a**. Power supply voltage generator circuit **114a** can provide a boosted power supply voltage  $V_{pp}$ . A memory array circuit **510a** may receive boosted power supply voltage  $V_{pp}$ . Boosted power supply voltage  $V_{pp}$  may be used to drive word lines (not shown) in memory array circuit **510a**.



In semiconductor device **110b**, internal power supply voltage  $V_{int}$  may be provided to power supply voltage generator circuit **114b**. Power supply voltage generator circuit **114b** can provide a boosted power supply voltage  $V_{pp}$ . A memory array circuit **510b** may receive boosted power supply voltage  $V_{pp}$ . Boosted power supply voltage  $V_{pp}$  may be used to drive word lines (not shown) in memory array circuit **510b**.

In semiconductor device **110c**, internal power supply voltage  $V_{int}$  may be provided to power supply voltage generator circuit **114c**. Power supply voltage generator circuit **114c** can provide a boosted power supply voltage  $V_{pp}$ . A memory array circuit **510c** may receive boosted power supply voltage  $V_{pp}$ . Boosted power supply voltage  $V_{pp}$  may be used to drive word lines (not shown) in memory array circuit **510c**.

In semiconductor device **110d**, internal power supply voltage  $V_{int}$  may be provided to power supply voltage generator circuit **114d**. Power supply voltage generator circuit **114d** can provide a boosted power supply voltage  $V_{pp}$ . A memory array circuit **510d** may receive boosted power supply voltage  $V_{pp}$ . Boosted power supply voltage  $V_{pp}$  may be used to drive word lines (not shown) in memory array circuit **510d**.

Power supply voltage generator circuits (**114a**, **114b**, **114c**, and **114d**) may operate to collectively and in parallel provide a commonly connected boosted power supply voltage  $V_{pp}$ . Boosted power supply voltage  $V_{pp}$  may be commonly connected by way of interface connections **122** and capacitance enhanced through vias **V2**. By commonly generating and commonly connecting boosted power supply voltage  $V_{pp}$  using power supply voltage generator circuits (**114a**, **114b**, **114c**, and **114d**), each power supply voltage generator circuit (**114a**, **114b**, **114c**, and **114d**) may be made smaller (i.e. lower drive strength) than in conventional semiconductor devices because each boosted power supply voltage generator circuit (**114a**, **114b**, **114c**, and **114d**) may only provide a portion of the current required by an active internal circuit.

Boosted power supply voltage  $V_{pp}$  may provide a high level of a word line in memory array circuits (**510a** to **510d**). Because boosted power supply voltage  $V_{pp}$  is commonly connected between semiconductor devices (**110a**, **110b**, **110c**, and **110d**), a similar potential may be written into memory cells (dynamic random access memory cells) in memory array circuits (**510a**, **510b**, **510c**, and **510d**). In this way, parameters such as pause-refresh timing may be consistent between devices and reliability may be improved.

Due to increased capacitance value of capacitance enhanced through vias **V2** electrically connected to receive and transmit boosted power supply voltage  $V_{pp}$ , essentially instantaneous charge may be locally available for each semiconductor device (**110a**, **110b**, **110c**, and **110d**) and noise may be reduced and/or attenuated.

Boosted power supply voltage  $V_{pp}$  may have a potential greater than internal power supply potential  $V_{int}$  and power supply voltage generator circuits (**114a**, **114b**, **114c**, and **114d**) may include voltage pumps including boost capacitors.

Referring now to FIG. 6, a package including a plurality of semiconductor devices according to an embodiment is set forth in a block schematic diagram and given the general reference character **600**. Package **600** can include similar constituents as package **100** of FIG. 1, such constituents may be referred to by the same reference character. FIG. 6 illustrates aspects of voltage generator circuits (**118a** to

**118d**) and reference voltage generator circuits (**116a** to **116d**) for package **100** of FIG. 1.

Package **600** can include semiconductor devices (**110a**, **110b**, **110c**, and **110d**). Each semiconductor device (**110a** to **110d**) can respectively include voltage generator circuits (**118a** to **118d**) arranged as discussed above with respect to package **300** of FIG. 3. Each semiconductor device (**110a** to **110d**) can respectively include a reference voltage generator circuit (**116a** to **116d**) and memory array circuits (**610a** to **610d**).

In semiconductor device **110a**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator circuit **116a**. Reference voltage generator circuit **116a** can provide a bit line reference voltage  $V_{blr}$ . A memory array circuit **610a** may receive bit line reference voltage  $V_{blr}$ . Bit line reference voltage  $V_{blr}$  may be used to precharge bit lines (not shown) in memory array circuit **610a**.

In semiconductor device **110b**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator circuit **116b**. Reference voltage generator circuit **116b** can provide a bit line reference voltage  $V_{blr}$ . A memory array circuit **610b** may receive bit line reference voltage  $V_{blr}$ . Bit line reference voltage  $V_{blr}$  may be used to precharge word lines (not shown) in memory array circuit **610b**.

In semiconductor device **110c**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator circuit **116c**. Reference voltage generator circuit **116c** can provide a bit line reference voltage  $V_{blr}$ . A memory array circuit **610c** may receive bit line reference voltage  $V_{blr}$ . Bit line reference voltage  $V_{blr}$  may be used to precharge word lines (not shown) in memory array circuit **610c**.

In semiconductor device **110d**, internal power supply voltage  $V_{int}$  may be provided to reference voltage generator circuit **116d**. Reference voltage generator circuit **116d** can provide a bit line reference voltage  $V_{blr}$ . A memory array circuit **610d** may receive bit line reference voltage  $V_{blr}$ . Bit line reference voltage  $V_{blr}$  may be used to precharge word lines (not shown) in memory array circuit **610d**.

Reference voltage generator circuits (**116a**, **116b**, **116c**, and **116d**) may operate to collectively and in parallel provide a commonly connected bit line reference voltage  $V_{blr}$ . Bit line reference voltage  $V_{blr}$  may be commonly connected by way of interface connections **122** and capacitance enhanced through vias **V2**. By commonly generating and commonly connecting bit line reference voltage  $V_{blr}$  using reference voltage generator circuits (**116a**, **116b**, **116c**, and **116d**), each reference voltage generator circuit (**116a**, **116b**, **116c**, and **116d**) may be made smaller (i.e. lower drive strength) than in conventional semiconductor devices because each reference voltage generator circuit (**116a**, **116b**, **116c**, and **116d**) may only provide a portion of the current required by an active internal circuit.

Bit line reference voltage  $V_{blr}$  may provide a precharge potential to bit lines in memory array circuits (**610a** to **610d**). Because bit line reference voltage  $V_{blr}$  is commonly connected between semiconductor devices (**110a**, **110b**, **110c**, and **110d**), a similar potential may be precharged in bit lines in memory array circuits (**610a**, **610b**, **610c**, and **610d**). In this way, parameters such as data integrity and pause-refresh timing may be consistent between devices and reliability may be improved.

Due to increased capacitance value of capacitance enhanced through vias **V2** electrically connected to receive and transmit bit line reference voltage  $V_{blr}$ , essentially instantaneous charge may be locally available for each semiconductor device (**110a**, **110b**, **110c**, and **110d**) and noise may be reduced and/or attenuated.

Bit line reference voltage  $V_{blr}$  may have a potential less than internal power supply potential  $V_{int}$  and have a potential that is essentially midway between internal power supply potential  $V_{int}$  and a reference potential such as a ground potential.

Referring now to FIG. 7, a top plan view of a package including a plurality of semiconductor devices according to an embodiment is set forth and given the general reference character **700**.

The top view of package **700** illustrates a top surface of an upper most semiconductor device **710a**.

Package **700** includes through vias **V1** and capacitance enhanced through vias **V2** arranged in an array.

Each through via **V1** can include a conductive material **722** providing an electrical connection through a semiconductor device.

Each capacitance enhanced through via **V2** can include a conductive material **712**, a conductive material **714**, and a dielectric material **716**. The conductive material **712** can provide an electrical connection through a semiconductor device. The conductive material **712** can provide a first capacitor node and the conductive material **714** can provide a second capacitor node. Dielectric material **716** can be formed between conductive material **712** and conductive material **714**. In this way, each capacitance enhance through via **V2** may include a capacitor having a first terminal formed from conductive material **712** and a second terminal formed by conductive material **714**.

Conductive material **714** may be an annular shape surrounding conductive material **712** and separated by dielectric material **716**. Conductive material **712** may have an annular outer surface. Dielectric material **716** may have an annular shape.

Package **700** includes a capacitance enhanced through via formed in region **720**, a through via formed in region **730**, and a capacitance enhance through via formed in region **740** shown along the line VIII-VIII'.

Referring now to FIG. 8, a cross sectional diagram of a package including a plurality of semiconductor devices according to an embodiment is set forth and given the general reference character **800**. Package **800** of FIG. 8 illustrates a cross-section of package **700** along the line VIII-VIII'.

Package **800** can include a semiconductor device **810a**, a semiconductor device **810b**, a semiconductor device **810c**, and a semiconductor device **810d**. Semiconductor device **810a** may correspond to semiconductor device **710a** in package **700** of FIG. 7. Package **800** may also include an interposer **140**.

Semiconductor device **810a** may include a capacitance enhanced through via **V2** formed in region **720** and a through via **V1** formed in region **730**. Each capacitance enhanced through via **V2** may include a first conductive material **712** and a second conductive material **714**, with a dielectric layer **716** formed there between. The second conductive material **714** may be electrically connected to a ground potential **VSS**. In this way, second conductive material **714** may provide a first terminal for a capacitor and first conductive material **712** may provide both a second terminal for a capacitor and a conductive trace for a voltage, such as an internal power supply voltage  $V_{int}$ , a boosted power supply voltage  $V_{pp}$ , a reference voltage  $V_{ref}$ , and/or a bit line reference voltage  $V_{blr}$ , or the like that may be commonly generated by and provided to semiconductor devices (**810a**, **810b**, **810c**, and **810d**).

Interface connections **822** may provide electrical connections between vertically adjacent through vias **V1** and

between vertically adjacent capacitance enhanced through vias **V2**. In particular, interface connections **822** may provide electrical connections between first conductive material **712** of vertically adjacent capacitance enhanced through vias **V2** and interface connections **822** may provide electrical connections between conductive material **722** of vertically adjacent through vias **V1**.

Through vias **V1** in conjunction with interface connections **822**, wiring **142** and external connections **150** may provide an electrical connection to external signals (such as data and control signals) and supply potentials such as power supply **VDD** and ground potential **VSS**.

Each semiconductor device (**810a**, **810b**, **810c**, and **810d**) may include a respective internal circuit (**820a**, **820b**, **820c**, and **820d**). Each internal circuit (**820a**, **820b**, **820c**, and **820d**) may be electrically connected to a capacitance enhanced through via **V2** by way of a wiring **850**. Internal circuits (**820a**, **820b**, **820c**, and **820d**) may correspond with a respective internal power supply generator circuit (**118a**, **118b**, **118c**, and **118d**), power supply generator circuit (**114a**, **114b**, **114c**, and **114d**), reference generator circuit (**112a**, **112b**, **112c**, and **112d**), and/or bit line reference generator circuit (**116a**, **116b**, **116c**, and **116d**) illustrated in FIG. 1.

Semiconductor devices (**810b** and **810c**) may include internal circuits (**830b** and **830c**), respectively. Internal circuits (**830b** and **830c**) may be electrically connected to a respective capacitance enhanced through via **V2** by way of wiring **850**. In this way, second conductive material **714** may provide a first terminal for a capacitor and first conductive material **712** may provide both a second terminal for a capacitor and a conductive trace for a voltage, such as an internal power supply voltage  $V_{int}$ , a boosted power supply voltage  $V_{pp}$ , a reference voltage  $V_{ref}$ , and/or a bit line reference voltage  $V_{blr}$ , or the like that can be commonly generated by and provided to semiconductor devices (**810b** and **810c**), exclusively.

Capacitance enhance through via **V2** formed in the bottom semiconductor device **810d** of the stack of semiconductor devices (**810a** to **810d**) may not be electrically connected to an interface connection **822** on a bottom surface of the semiconductor device **810d**.

FIGS. 9A to 9I are cross-sectional diagrams of a semiconductor device at various process steps of forming through vias and capacitance enhanced through vias according to an embodiment.

Referring now to FIG. 9A, in a first step, a mask layer **912** may be formed and patterned on a substrate **910** to form openings **914** in mask layer **912**.

Referring now to FIG. 9B, in a next step, a deep trench **916** may be etched in the substrate **910** through openings **914** in an anisotropic process. The deep trench **916** may have an annular shape from a top view.

Referring now to FIG. 9C, in a next step, mask layer **912** may be removed and an oxide layer (not shown) may be deposited or grown on the surface including a surface of deep trench **916** followed by the deposition of a conductive material **918** being deposited over the entire surface of substrate **910** to fill deep trench **916**. Conductive material **918** may include at least one material selected from the group consisting of: polysilicon, copper, aluminum, cobalt, nickel, and titanium.

Referring now to FIG. 9D, in a next step, a chemical mechanical polishing process may be used to remove the conductive material **918** from the upper surface of substrate **910**, leaving conductive material **918** in the deep trench. In

13

a next step, a mask layer **920** may be formed and patterned on the upper surface of substrate **910** to form openings **922** in mask layer **920**.

Referring now to FIG. 9E, in a next step, a deep trench **932** may be etched in the substrate **910** through openings **922** in an anisotropic process. Deep trench **932** may have an annular shape from a top view.

Referring now to FIG. 9F, in a next step, mask layer **920** may be removed and an oxide layer (not shown) may be deposited or grown on the surface including a surface of deep trench **932** followed by the deposition of a conductive material **924** being deposited over the entire surface of substrate **910** including the surface of deep trench **932**. Next, a dielectric material **926** may be deposited over the entire surface of conductive material with an atomic layer deposition method. Conductive material **924** may include at least one material selected from the group consisting of: polysilicon, copper, aluminum, cobalt, nickel, and titanium. Dielectric material **926** may include at least one material selected from the group consisting of: silicon dioxide, nitride, zirconium oxide, aluminum oxide, and hafnium oxide.

Referring now to FIG. 9G, a conductive material **928** may be deposited over the entire surface of substrate **910** including filling the remainder of deep trench **932**. Conductive material **928** may include at least one material selected from the group consisting of: polysilicon, copper, aluminum, cobalt, nickel, and titanium.

Referring now to FIG. 9H, in a next step, a chemical mechanical polishing process may be used to remove the conductive material **924**, dielectric material **926**, and conductive material **928** from the upper surface of substrate **910**, leaving conductive material **924**, dielectric material **926**, and conductive material **928** in the deep trench **932**.

Referring now to FIG. 9I, in a next step, a substrate **910** may be thinned (a step of thinning) by grinding the back surface to remove the lower portions of substrate **910**, conductive material **918**, conductive material **924**, dielectric material **926**, and conductive material **928**. In this way, through vias **V1** and capacitance enhanced through vias **V2** may be formed by exposing conductive material **928**. Through vias **V1** may include conductive material **918** to provide an electrical connection through a semiconductor device including substrate **910**. Capacitance enhance through vias **V2** may include conductive material **924** providing a first terminal for a capacitor, dielectric material **926** providing a dielectric layer for a capacitor, and conductive material **928** providing a second terminal for a capacitor and an electrical connection through a semiconductor device including substrate **910**.

Referring now to FIG. 10, a semiconductor device including through vias and capacitance enhance through vias according to an embodiment is set forth in a cross-sectional diagram. The semiconductor device in FIG. 10 illustrates subsequent interconnect wiring after through via **V1** and capacitance enhance through via **V2** structures have been formed.

In particular, the semiconductor device **1000** may further include a first circuit **1010** and a second circuit **1020**. First circuit **1010** may correspond to any of internal power supply voltage generator circuits (**118a** to **118d**), as just one example. Second circuit **1020** may correspond to any of reference voltage generator circuits (**112a** to **112d**), boosted power supply voltage generator circuits (**114a** to **114d**), bit line reference voltage generator circuits (**116a** to **116d**), or internal power supply voltage generator circuits (**118a** to **118d**), as just a few examples.

14

In a step, an insulating layer **1030** may be deposited and patterned. In a next step, a conductive material may be formed in the patterned areas of insulating layer **1030** to form interconnects (**1012**, **1014**, and **1016**).

In a next step, an insulating layer **1034** may be deposited and patterned. In a next step, a conductive material may be formed in the patterned areas of insulating layer **1034** to form a contact pad **1036** and a contact pad **1038**.

In a step, an insulating layer **1038** may be patterned and etched to provide openings to contact pads (**1036** and **1038**).

In a step, an insulating layer **1002** may be patterned and etched to provide openings to contact pads (**1004** and **1006**), respectively, formed on a bottom surface of through via **V1** and capacitance enhanced through via **V2**.

Contact pads (**1036** and **1038**) may be electrically connected to interface connections **122** (FIG. 1) on an upper surface of semiconductor device **1000** as needed and contact pads (**1004** and **1006**) may be electrically connected to interface connections **122** (FIG. 1) on bottom surface of semiconductor device **1000** as needed.

All of the steps illustrated in FIGS. 9A-9I and FIG. 10 may be performed simultaneously on a plurality of semiconductor devices on a contiguous wafer.

Subsequent to the process steps illustrated in FIGS. 9A-9I and FIG. 10, the wafer including semiconductor devices may be diced. Interface connections **122** may be placed on contact pads (**1036** and **1038**) or surface of semiconductor device **1000** as needed and contact pads (**1004** and **1006**). Interface connections **122** may be solder balls, solder bumps, or copper pillars, or the like. A plurality of semiconductor devices may then be stacked on an interposer **140**, encapsulated, and external connections **150** may be placed to form a package of including a plurality of semiconductor devices (**100**, **300**, **400**, **500**, **600**, **700**, and/or **800**).

Referring now to FIG. 11, a portion of memory array circuit according to an embodiment is set forth in a circuit schematic diagram.

The portion of a memory array circuit of FIG. 11 may include elements of memory array circuits (**510a**, **510b**, **510c**, and **510d**) in FIG. 5 and/or elements of memory array circuits (**610a**, **610b**, **610c**, and **610d**) in FIG. 6.

The portion of a memory array circuit of FIG. 11 may include a word line driver circuit **1110**, a bit line precharge circuit **1120**, and a memory cell **1130**. Memory cell **1130** may be a dynamic random access memory (DRAM) cell including a transistor (an insulated gate field effect transistor (IGFET)) and a capacitor.

Word line driver circuit **1110** may receive boosted power supply voltage  $V_{pp}$  and may have an output connected to a word line **WL**. Bit line precharge circuit **1120** may receive a bit line reference voltage  $V_{blr}$  and may have an output connected to a bit line **BL**. Memory cell **1130** may be connected to word line **WL** and bit line **BL** at a cross point.

Referring now to FIG. 12, a waveform diagram illustrating the operation of the memory array circuits of FIG. 11 according to an embodiment is set forth.

The waveform diagram of FIG. 12 includes waveforms for word line **WL** and bit line **BL**.

Initially, bit line **BL** may be precharged to the potential of the bit line reference voltage  $V_{blr}$  by bit line precharge circuit **1120**. After a memory access, word line driver circuit **1110** may drive word line **WL** from a logic low to a logic high at time  $T_1$ . At this time, word line **WL** may driven to a boosted power supply voltage  $V_{pp}$ . A transistor in memory cell **MC** may be turned on to transfer charge from a capacitor in memory cell **MC** to bit line **BL**. At time  $T_2$ , a sense

## 15

amplifier (not shown) may drive the bit line to a logic high (solid line) or logic low (dashed line) in response to the charge that was transferred from the memory cell MC to bit line BL.

At a time T3, word line driver circuit 1110 may drive word line WL back to a logic low level. At a time T4, bit line precharge circuit 1120 may precharge bit line BL back to a bit line reference voltage Vblr.

Referring now to FIG. 13, a waveform diagram illustrating a signal with a substantially stable voltage is set forth.

The waveform diagram of FIG. 13 includes a signal 1310 that is intended to be a substantially stable voltage. Signal 1310 may be internal power supply voltage Vint, boosted power supply voltage Vpp, bit line reference voltage Vblr, reference voltage Vref, or the like. At time T1, a load attached to signal 1310 can draw an instantaneous current causing noise in the way of a dip. Dip 1312 can represent a case in which semiconductor devices (110a, 110b, 110c, and 110d) include capacitance enhance vias V2 and provide the voltage generators (112a-112d, 114a-114d, 116a-116d, and 118a-118d), respectively. Dip 1314 may represent a case in which a semiconductor device may generate the signal 1310 without the parallel driving of voltage generators commonly to a plurality of semiconductor devices or the use of capacitance enhanced vias V2. In particular, if a reference voltage Vref is used as a reference potential in an input buffer, incoming signals, such as data signal DATA or control signals CTL may be erroneously read when noise causes substantial variations in voltage level. Likewise, if substantial variations in voltage level occur in a bit line reference voltage Vblr, data in a dynamic random access memory (DRAM) cell may be erroneously read. If substantial variations in a voltage level occur in a boosted power supply voltage Vpp, proper levels may not be written into a DRAM cell and pause times may be compromised. If substantial variations in a voltage level occur in an internal power supply voltage Vint, internal circuits may not operate properly. Furthermore, internal power supply voltage Vint may be used to generate other voltages, such as boosted power supply voltage Vpp, bit line reference voltage Vblr, and reference voltage Vref, which can compound erroneous operations of a semiconductor device.

According to the embodiments, through vias V1 may provide an electrical connection for signals that may transition between logic states, such as control signals CTL and data signals DATA. Capacitance enhanced through vias V2 may provide an electrical connection from a first side to a second side of the respective semiconductor device for transmission of signals that remain substantially stable such as reference voltages (Vref and Vblr), power supply voltages (Vint and Vpp) or the like. Such reference voltages may remain substantially stable when a respective semiconductor device is in a normal (first) mode of operation, such as an active mode, for example, a read or write mode of operation in a semiconductor memory device. In this way, noise may be reduced and a reservoir of charge for circuits that provide a load for reference voltages and/or power supply voltages may be provided.

By distributing power supply generator circuits (114a to 114d and 118a to 118d) and reference voltage generator circuits (112a to 112d and 116a to 116d) throughout a package of a plurality of semiconductor devices (110a to 110d), adverse temperature effects may be reduced by distributing hot spots.

A voltage may be expressed as a potential. Internal power supply voltage Vint may be considered an internal power supply potential. Boosted power supply voltage Vpp may be

## 16

considered a boosted power supply potential. Bit line reference voltage Vblr may be considered a bit line reference potential. Reference voltage Vref may be considered a reference potential.

Other electrical apparatus other than semiconductor devices may benefit from the invention.

While various particular embodiments set forth herein have been described in detail, the present invention could be subject to various changes, substitutions, and alterations without departing from the spirit and scope of the invention. Accordingly, the present invention is intended to be limited only as defined by the appended claims.

What is claimed is:

1. A system, comprising:

a first semiconductor device including a first capacitor, the first capacitor including a first terminal coupled to receive a power supply potential; and

a second semiconductor device including a first voltage generator coupled to the first terminal of the first capacitor, the first voltage generator provides a first voltage generator output potential at an output terminal; wherein

the first capacitor includes a first capacitor node and a second capacitor node, the first capacitor node and the second capacitor node each include at least one substantially vertically formed conductive portion in a substrate of the first semiconductor device that are separated from one another by at least one capacitor dielectric, the first capacitor node is electrically connected to the first terminal of the first capacitor.

2. The system of claim 1, further including:

a third semiconductor device including a second capacitor, the second capacitor including a first terminal coupled to receive the power supply potential; wherein the second capacitor includes a first capacitor node and a second capacitor node, the first capacitor node and the second capacitor node each include substantially vertically formed conductive portions in a substrate of the third semiconductor device that are separated from one another by at least one capacitor dielectric, the first capacitor node of the second capacitor is electrically connected to the first terminal of the second capacitor.

3. The system of claim 2, further including:

a fourth semiconductor device including a third capacitor, the third capacitor including a first terminal coupled to receive the power supply potential; wherein

the third capacitor includes a first capacitor node and a second capacitor node, the first capacitor node and the second capacitor node each include substantially vertically formed conductive portions in a substrate of the fourth semiconductor device that are separated from one another by at least one capacitor dielectric, the first capacitor node of the third capacitor is electrically connected to the first terminal of the third capacitor.

4. The system of claim 1, wherein:

the at least one substantially vertically formed conductive portion of the first and second capacitor nodes includes a first conductive material vertically disposed in the substrate of the first semiconductor device, a second conductive material vertically disposed in the substrate of the first semiconductor device, and the at least one dielectric formed between the first and second conductive materials.

5. The system of claim 4, wherein the first or second conductive material is selected from the group of: polysilicon, copper, aluminum, cobalt, nickel, and titanium.

17

6. The system of claim 4, wherein the first or second conductive material has an annular shape.

7. The system of claim 1, wherein the second capacitor node is electrically connected to a reference potential.

8. The system of claim 1, wherein the at least one dielectric is selected from the group of: silicon dioxide, nitride, zirconium oxide, aluminum oxide, and hafnium oxide.

9. The system of claim 1, further including:  
 the first semiconductor device is disposed in a first direction from the second semiconductor device;  
 a first semiconductor memory device is disposed in a second direction, opposite to the first direction, from the second semiconductor device; and  
 at least one conductive data path coupled between the first semiconductor memory device and the second semiconductor device.

10. The system of claim 9, further including a second semiconductor memory device is disposed in the second direction from the second semiconductor device.

11. The system of claim 9, wherein the first semiconductor memory device is coupled to receive the power supply potential.

12. The system of claim 9, wherein the first semiconductor memory device is a dynamic random access memory (DRAM) device.

13. The system of claim 9, wherein the first semiconductor memory device includes a second voltage generator coupled to the first terminal of the first capacitor, the second voltage generator provides a second voltage generator output potential at a second output terminal.

14. The system of claim 13, wherein the second voltage generator output is selected from the group of: a reference voltage provided to an input buffer on the first semiconductor memory device, a power supply voltage for the first semiconductor memory device, and a bit line reference voltage for the first semiconductor memory device.

18

15. The system of claim 1, wherein the first voltage generator output potential is a reference voltage provided to an input buffer on the second semiconductor device.

16. The system of claim 1, wherein the first voltage generator output potential is a power supply voltage for internal circuits formed on the second semiconductor device.

17. The system of claim 1, wherein the first voltage generator output potential is a boosted power supply voltage.

18. The system of claim 1, further including an interface connection coupled between the second semiconductor device and the first terminal of the first capacitor.

19. The system of claim 18, wherein the interface connection comprises a material selected from the group of: solder or copper.

20. The system of claim 1, wherein  
 the second semiconductor device includes an active mode of operation; and  
 the first capacitor is configured to provide a power supply potential that is substantially stable when the second semiconductor device is in the active mode of operation.

21. The system of claim 1, further including:  
 a first semiconductor memory device  
 the first semiconductor device is disposed between the first semiconductor memory device and the second semiconductor device; and  
 at least one conductive data path coupled between the first semiconductor memory device and the second semiconductor device.

22. The system of claim 21, further including a second semiconductor memory device, the first semiconductor memory device is disposed between the second semiconductor memory device and the second semiconductor device.

\* \* \* \* \*