



US009745018B2

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 9,745,018 B2**
(45) **Date of Patent:** **Aug. 29, 2017**

(54) **WHEEL HUB MOTOR AND MOTOR HOUSING OF WHEEL HUB MOTOR**

(58) **Field of Classification Search**
CPC B60B 27/0015; B60K 7/0007; H02K 5/04;
H02K 7/14; B62M 6/60
See application file for complete search history.

(71) Applicant: **HON HAI PRECISION INDUSTRY CO., LTD.**, New Taipei (TW)

(72) Inventors: **Yen-Chi Chen**, New Taipei (TW);
Chang-Yuan Shih, New Taipei (TW);
Shih-Hsin Hsu, New Taipei (TW)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignee: **HON HAI PRECISION INDUSTRY CO., LTD.**, New Taipei (TW)

7,137,315 B2* 11/2006 Chang B60K 7/0015
180/308

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 69 days.

FOREIGN PATENT DOCUMENTS

TW M440930 U 11/2012

* cited by examiner

(21) Appl. No.: **14/790,315**

Primary Examiner — John Walters

(22) Filed: **Jul. 2, 2015**

Assistant Examiner — James Triggs

(65) **Prior Publication Data**

US 2016/033994 A1 Nov. 24, 2016

(74) *Attorney, Agent, or Firm* — Steven Reiss

(30) **Foreign Application Priority Data**

May 18, 2015 (TW) 104115810 A

(57) **ABSTRACT**


(51) **Int. Cl.**
B62M 6/60 (2010.01)
B60B 27/00 (2006.01)
B60K 7/00 (2006.01)
H02K 5/04 (2006.01)
H02K 7/14 (2006.01)

A wheel hub motor includes a motor housing and a motor received in the motor housing. The motor housing includes a first holder, a second holder coupled to the first holder, and a protective ring detachably coupled to the second holder. The motor is received in the first holder and the second holder. An inner diameter of the second holder is equal to an outer diameter of the motor. An outer diameter of the protective ring is greater than the outer diameter of the motor. An inner diameter of the protective ring is smaller than the outer diameter of the motor.

(52) **U.S. Cl.**
CPC **B62M 6/60** (2013.01); **B60B 27/0015** (2013.01); **B60K 7/0007** (2013.01); **H02K 5/04** (2013.01); **H02K 7/14** (2013.01); **B60K 2007/0092** (2013.01)

12 Claims, 8 Drawing Sheets

100 →

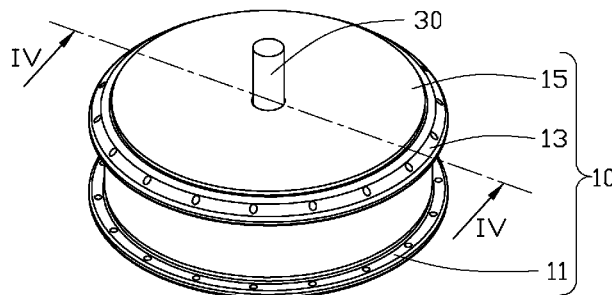

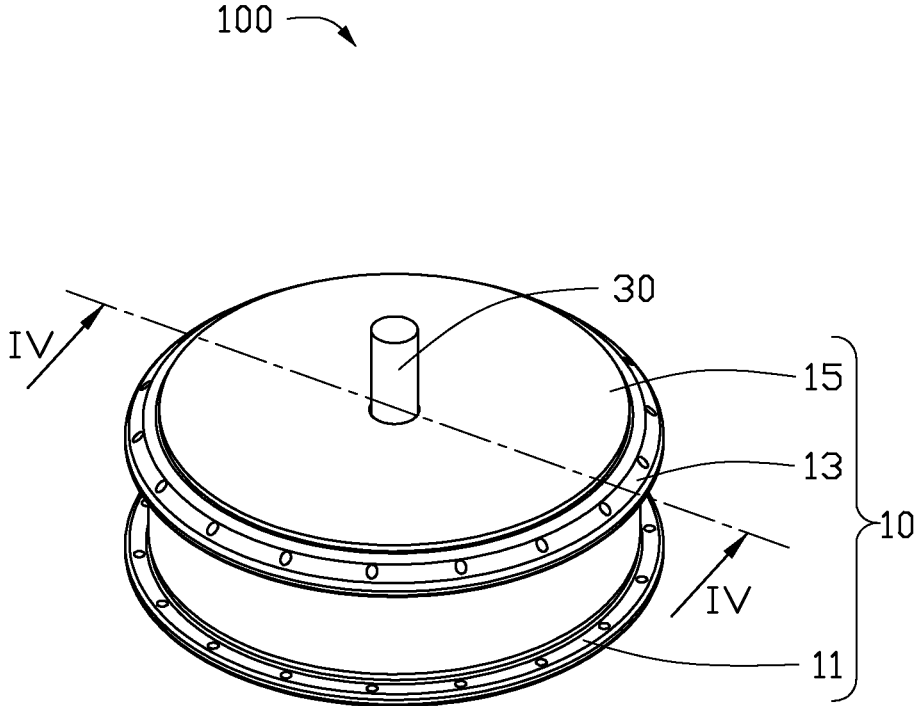


FIG. 1

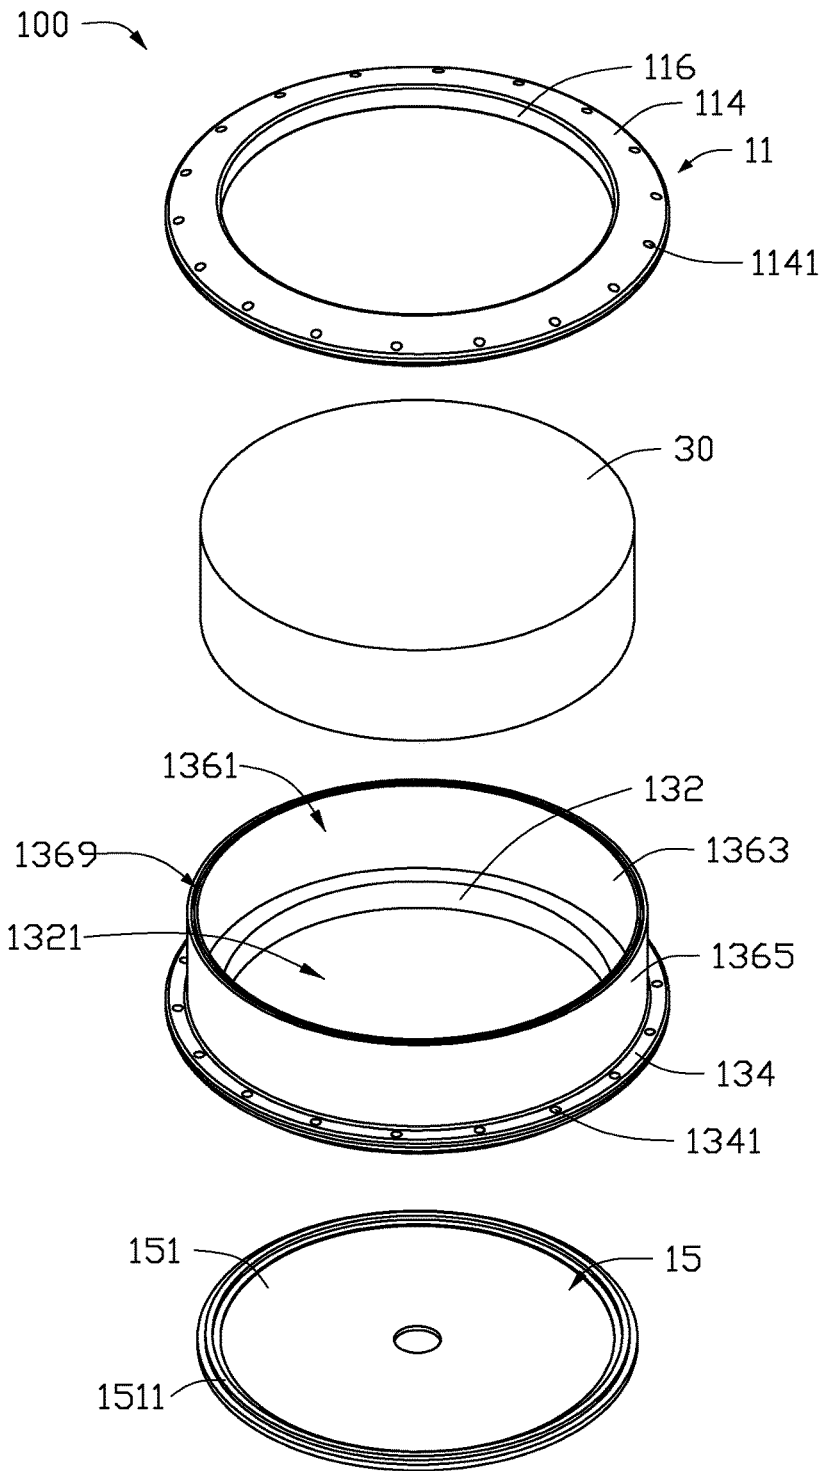


FIG. 2

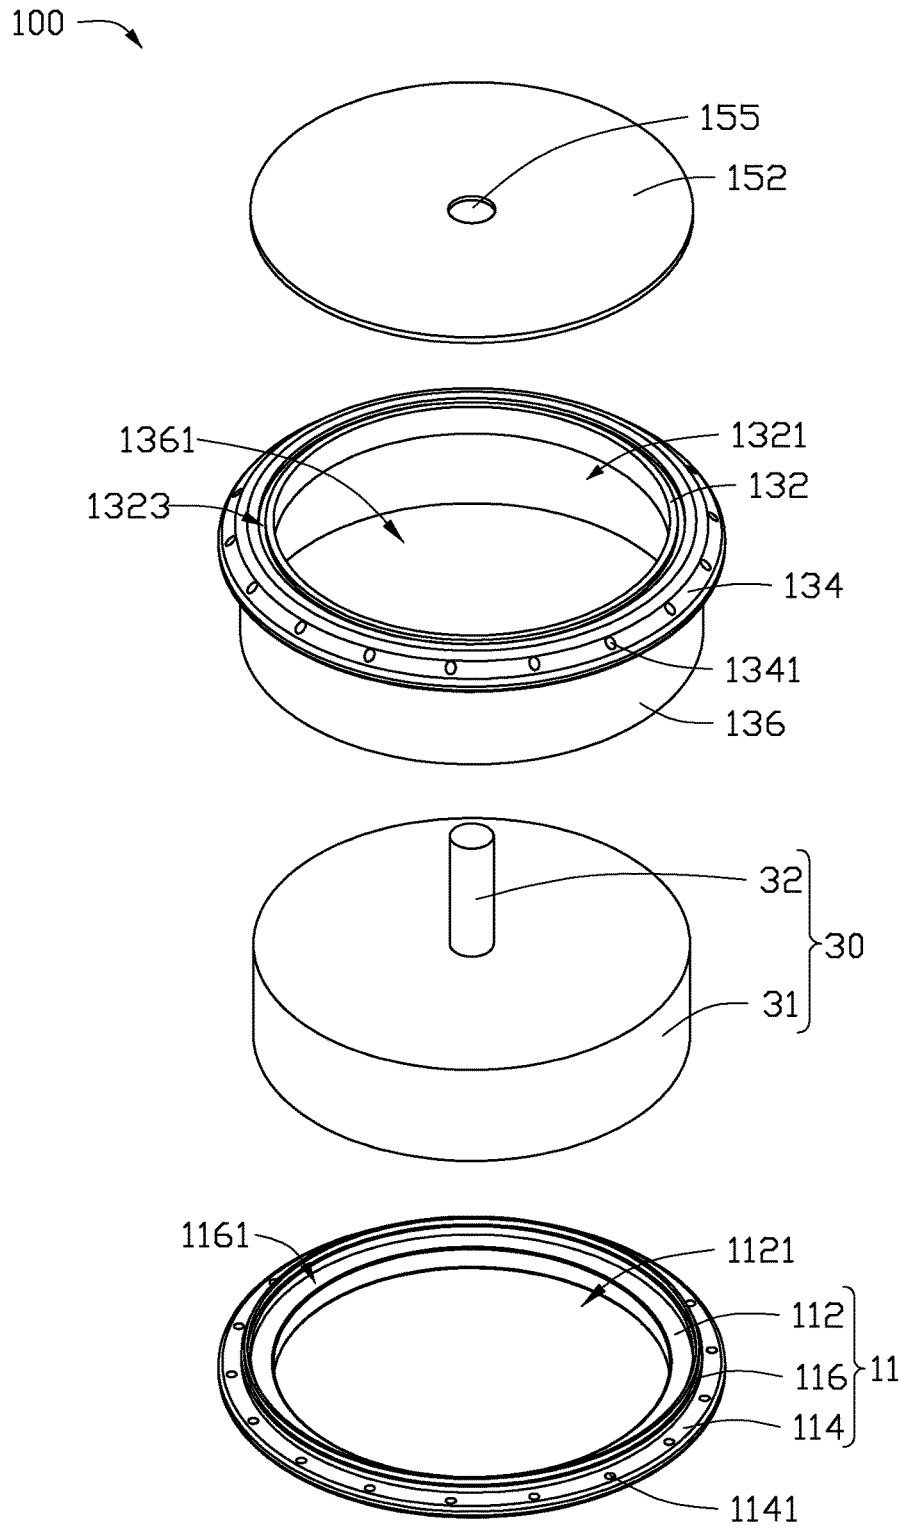


FIG. 3

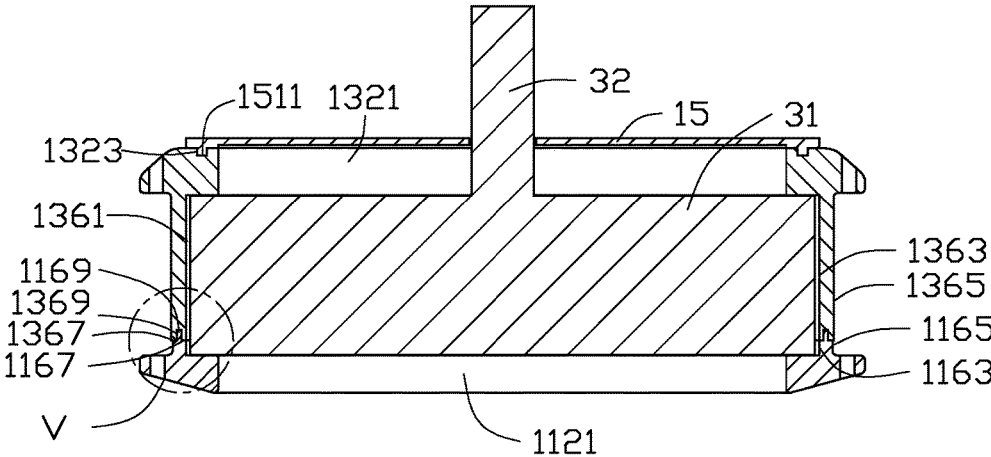


FIG. 4

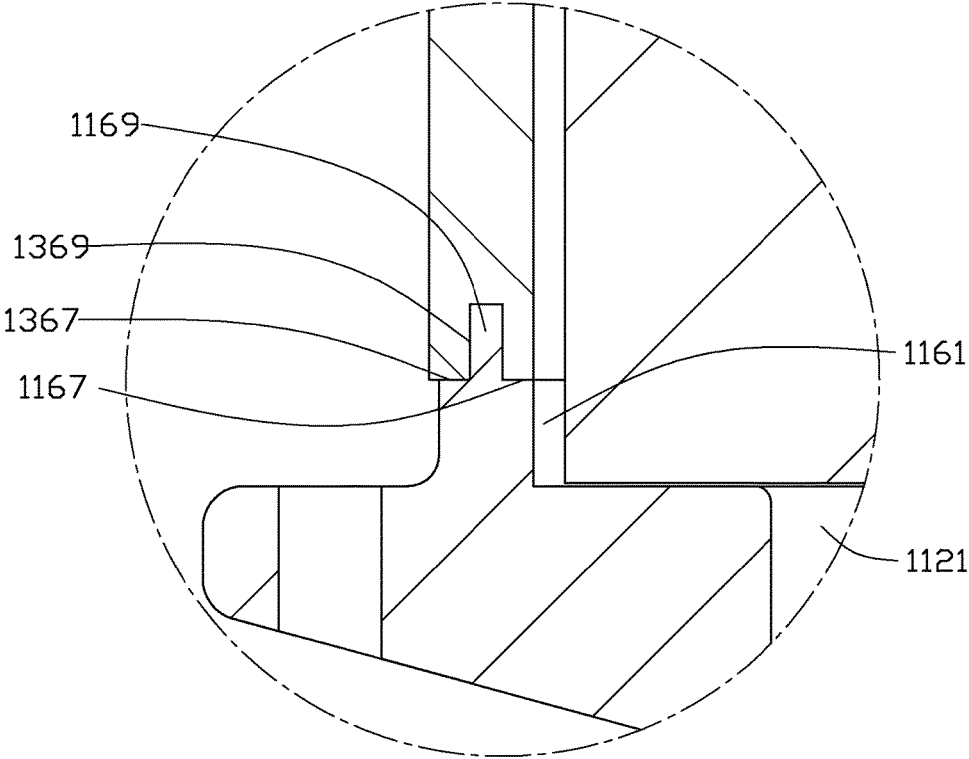


FIG. 5

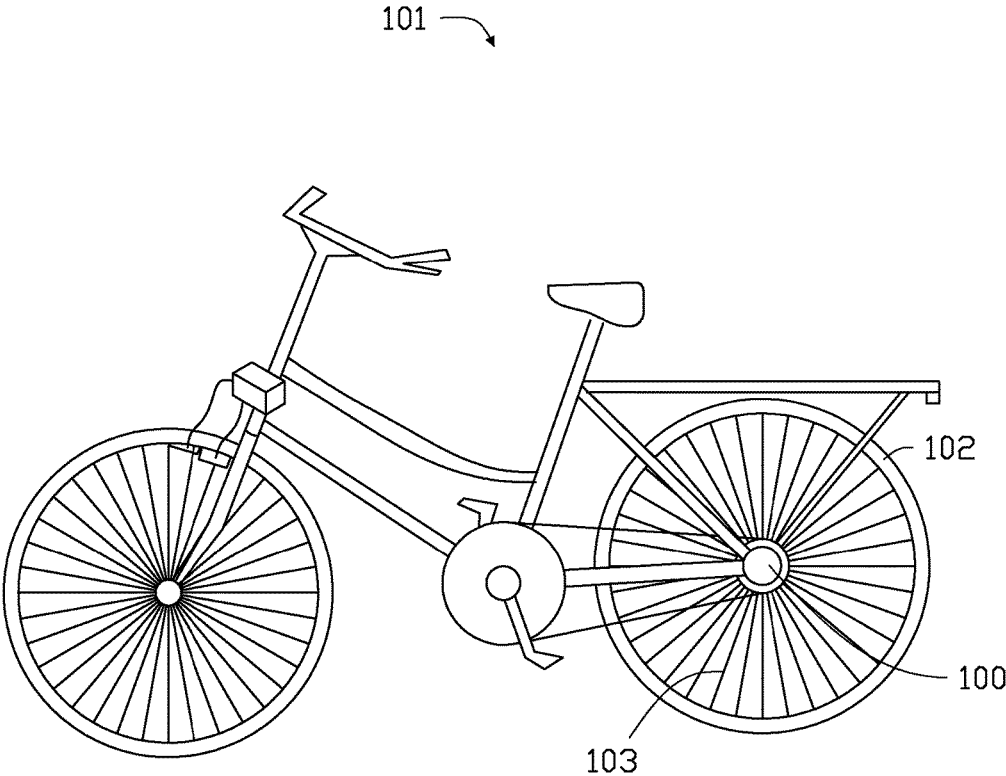


FIG. 6

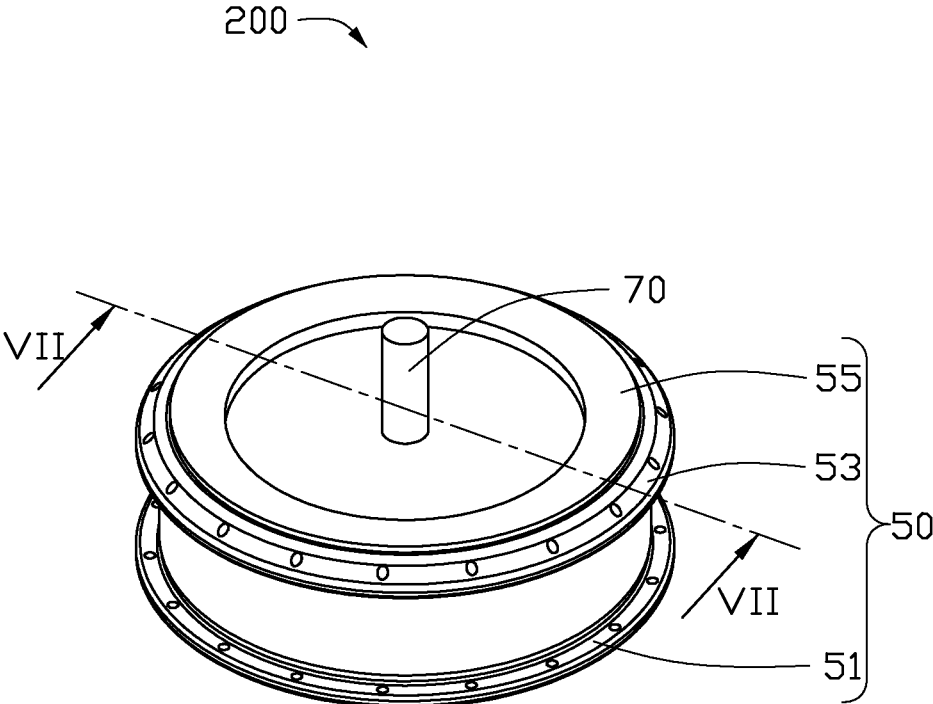


FIG. 7

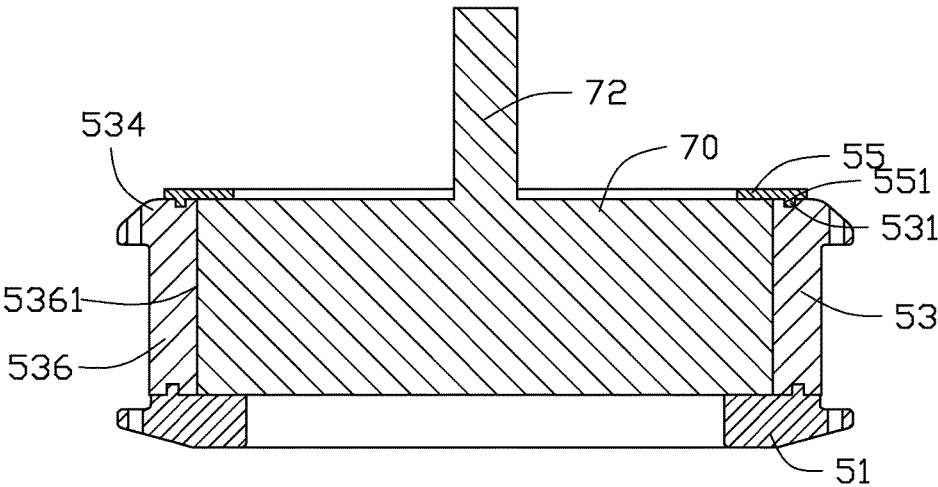


FIG. 8

1

WHEEL HUB MOTOR AND MOTOR HOUSING OF WHEEL HUB MOTOR

FIELD

The subject matter herein generally relates to wheel hub motors, and particularly to a wheel hub motor for a vehicle using electric power and a motor housing for holding a motor.

BACKGROUND

Vehicles using electric power, such as electric bicycles, are very popular, especially for young people. A wheel hub motor is provided in an electric bicycle for driving the electric bicycle.

BRIEF DESCRIPTION OF THE DRAWINGS

Implementations of the present technology will now be described, by way of example only, with reference to the attached figures.

FIG. 1 is an isometric view of a first embodiment of a wheel hub motor.

FIG. 2 is an exploded, isometric view of the wheel hub motor of FIG. 1.

FIG. 3 is similar to FIG. 2, but viewed from another angle.

FIG. 4 is a cross-sectional view of the wheel hub motor of FIG. 1, taken along line IV-IV.

FIG. 5 is an enlarged view of a circle V of FIG. 4.

FIG. 6 is a side view of a bicycle having the wheel hub motor of FIG. 1.

FIG. 7 is an isometric view of a second embodiment of a wheel hub motor.

FIG. 8 is a cross-sectional view of the wheel hub motor of FIG. 6, taken along line VII-VII.

DETAILED DESCRIPTION

It will be appreciated that for simplicity and clarity of illustration, where appropriate, reference numerals have been repeated among the different figures to indicate corresponding or analogous elements. In addition, numerous specific details are set forth in order to provide a thorough understanding of the embodiments described herein. However, it will be understood by those of ordinary skill in the art that the embodiments described herein can be practiced without these specific details. In other instances, methods, procedures, and components have not been described in detail so as not to obscure the related relevant feature being described. Also, the description is not to be considered as limiting the scope of the embodiments described herein. The drawings are not necessarily to scale and the proportions of certain parts may be exaggerated to better illustrate details and features of the present disclosure.

Several definitions that apply throughout this disclosure will now be presented.

The term “coupled” is defined as connected, whether directly or indirectly through intervening components, and is not necessarily limited to physical connections. The connection can be such that the objects are permanently connected or releasably connected. The term “substantially” is defined to be essentially conforming to the particular dimension, shape, or other feature that the term modifies, such that the component need not be exact. For example, “substantially cylindrical” means that the object resembles a cylinder, but can have one or more deviations from a true

2

cylinder. The term “comprising,” when utilized, means “including, but not necessarily limited to”; it specifically indicates open-ended inclusion or membership in the so-described combination, group, series and the like.

The present disclosure is in relation to a wheel hub motor can include a motor housing and a motor. The motor housing can include a first holder, a second holder detachably coupled to the first holder, and a protective ring detachably coupled to the second holder. The second holder can be positioned between the first holder and the protective ring. The motor can include a motor body and a rotatable shaft protruding from the motor body and extending out from the protective ring. The motor body can be received between the first holder and the second holder.

The present disclosure is in relation to a wheel hub motor can include a motor and a motor housing. The motor housing can include first and second holders detachably coupled to each other to define a cavity there between. The first and second holders each have an inwardly extending ledge that supports an end of the motor in the cavity. One of the first and second holders has a groove and the other of said first and second holders has a mating convex. The groove and convex engage to couple the first and second holders together. The first and second holders each have an outwardly facing ledge with holes therein. The holes are configured to receive at least one line member to secure the wheel hub motor to another object to be driven by the motor.

FIG. 1 illustrates an isometric view of a first embodiment of a wheel hub motor **100**. The wheel hub motor **100** can include a motor housing **10** and a motor **30**. The motor housing **10** can be a detachable structure. The motor **30** can be received in the motor housing **10**. Since to the motor housing **10** is detachable, the motor **30** can be replaced by another motor of different performance. The wheel hub motor **100** can be used in a vehicle using electric power. In the illustrated embodiment, the wheel hub motor **100** is used in an electric bicycle.

The motor housing **10** can include a first holder **11**, a second holder **13**, and a protective ring **15**. The first holder **11** and the second holder **13** can be detachably coupled to each other to define a cavity therebetween. The motor **30** can be received between the first holder **11** and the second holder **13**. The protective ring **15** can be detachably coupled to the second holder **13**, and configured to protect the motor **30**. The second holder **13** can be sandwiched between the first holder **11** and the protective ring **15**. In the illustrated embodiment, the first holder **11**, the second holder **13**, and the protective ring **15** can be substantially ring-shaped.

FIG. 2 illustrates that the first holder **11** can include an inwardly extending ledge **112**, an outwardly facing ledge **114**, and an annular protrude portion **116**. The inwardly extending ledge **112** can be an inner ring of the first holder **11**, and the outwardly facing ledge **114** can be an outer ring of the first holder **11**. The outwardly facing ledge **114** can be positioned at an outer periphery of the inwardly extending ledge **112**. The inwardly extending ledge **112** can be coaxial with the outwardly facing ledge **114**. The annular protrude portion **116** can protrude from a boundary of the inwardly extending ledge **112** and the outwardly facing ledge **114**. The annular protrude portion **116** can be substantially perpendicular to the inwardly extending ledge **112** and the outwardly facing ledge **114**. In the illustrated embodiment, the inwardly extending ledge **112**, the outwardly facing ledge **114**, and the annular protrude portion **116** can be integrated into one-piece.

The inwardly extending ledge **112** can define a first through hole **1121**. The annular protrude portion **116** can

define a first receiving hole **1161**. An inner diameter of the annular protrude portion **116** (that is a diameter of the first receiving hole **1161**) can be larger than an inner diameter of the inwardly extending ledge **112** (that is a diameter of the first through hole **1121**). The inner diameter of the annular protrude portion **116** can be equal to an outer diameter of the motor **30**. Thus, the motor **30** can be put into the first holder **11** from the first receiving hole **1161** until touching the annular support member **112**. The outwardly facing ledge **114** can define a plurality of coupling holes **1141** arranged around a periphery of the outwardly facing ledge **114**. The coupling holes **1141** are configured to pass one or more line members of a wheel, thus the one or more line members can be fixed to the outwardly facing ledge **114**. The one or more line members can be one or more steel wires.

A structure of the second holder **13** can be similar to a structure of the first holder **11**. The second holder **13** can include an inwardly extending ledge **132**, an outwardly facing ledge **134**, and an annular protrude portion **136**. The inwardly extending ledge **132** can be an inner ring of the second holder **13**, and the outwardly facing ledge **134** can be an outer ring of the second holder **13**. The outwardly facing ledge **134** can be position at an outer periphery of the inwardly extending ledge **132**. The inwardly extending ledge **132** can be coaxial with the outwardly facing ledge **134**. The annular protrude portion **136** can protrude from a boundary of the inwardly extending ledge **132** and the outwardly facing ledge **134**. The annular protrude portion **136** can be substantially perpendicular to the inwardly extending ledge **132** and the outwardly facing ledge **134**. In the illustrated embodiment, the inwardly extending ledge **132**, the outwardly facing ledge **134**, and the annular protrude portion **136** can be integrated into one-piece.

The inwardly extending ledge **132** can define a second through hole **1321**. The annular protrude portion **136** can define a second receiving hole **1361**. When the first holder **11** is coupled to the second holder **13**, the second receiving hole **1361** and the first receiving hole **1161** can corporately define the cavity between the first holder **11** and the second holder **13**. An inner diameter of the annular protrude portion **136** (that is a diameter of the second receiving hole **1361**) can be larger than an inner diameter of the inwardly extending ledge **132** (that is a diameter of the second through hole **1321**). The inner diameter of the annular protrude portion **136** can be equal to an outer diameter of the motor **30**. Thus, the motor **30** can be put into the second holder **13** from the second receiving hole **1361** until touching the annular support member **132**. The outwardly facing ledge **134** can define a plurality of coupling holes **1341** arranged around a periphery of the outwardly facing ledge **134**. The coupling holes **1341** are configured to pass one or more line members of a wheel passing through, thus the one or more line members can be fixed to the outwardly facing ledge **134**. The one or more line members can be one or more steel wires.

FIGS. 3 to 5 illustrate that the annular protrude portion **116** of the first holder **11** can include an inner wall **1163**, an outer wall **1165**, and an end wall **1167**. The inner wall **1163** and the outer wall **1165** can be concentric ring walls. The end wall **1167** can be ring-shaped, and substantially perpendicular to the inner wall **1163** and the outer wall **1165**. A convex **1169** can protrude from the end wall **1167**.

The inwardly extending ledge **132** can define an annular positioning groove **1323** for coupling the protective ring **15**. The annular protrude portion **136** of the second holder **11** can include an inner wall **1363**, an outer wall **1365**, and an end wall **1367**. The inner wall **1363** and the outer wall **1365** can be concentric ring walls. The end wall **1367** can be

ring-shaped, and substantially perpendicular to the inner wall **1363** and the outer wall **1365**. The end wall **1367** can be substantially parallel to the inwardly extending ledge **132** and the outwardly facing ledge **134**. The end wall **1367** can define a latching groove **1369** for detachably latched with the convex **1169**.

The protective ring **15** can include a first surface **151** and a second surface **152** opposite to the first surface **151**. The first surface **151** can be parallel to the second surface **152**. An annular positioning protrusion **1511** can protrude from the first surface **151**, and configured to be detachably coupled to the positioning groove **1323**. Thus, the protective ring **15** can be detachably coupled to the second holder **13**. The protective ring **15** can define a third through hole **155**. The third through hole **155** can run through the first surface **151** and the second surface **152**.

The motor **30** can include a drive body **31** and a rotatable shaft **32** protruding from the drive body **31**. The drive body **31** can be received between the first holder **11** and the second holder **13**, and the rotatable shaft **32** can extend out from the third through hole **155** of the protective ring **15**. The inwardly extending ledge **112** of the first holder **11** and the inwardly extending ledge **132** of the second holder **13** can respectively block opposite ends of the motor **30**, to prevent the motor **30** from dropping out of motor housing **10**.

When the motor **30** needs to be replaced, the first holder **11** and the second holder **13** can be detached. After another motor is replaced, the first holder **11** and the second holder **13** can be coupled together again. The protective ring **15** can be alternatively detached from the second holder **13** during replacing the motor. When the protective ring **15** is detached during replacing the motor, an user can see whether a size of a replaced motor is suitable from the second through hole **1321**.

FIG. 6 illustrates a bicycle **101** having the wheel hub motor **100**. The wheel hub motor **100** can be coupled to a tire **102** of the bicycle **101** via a plurality of steel wires **103**. The coupling holes **1341** and the coupling holes **1141** are configured to pass one or more steel wires **103**, thus the steel wires **103** can be fixed to the outwardly facing ledge **134** and the outwardly facing ledge **114**. Thus, the motor **30** can drive the tire **102** via the steel wires **103**.

FIG. 7 illustrates an isometric view of a second embodiment of a wheel hub motor **200**. A structure of the wheel hub motor **200** can be similar to a structure of the wheel hub motor **100** of the first embodiment. The wheel hub motor **200** can include a motor housing **50** and a motor **70**. The motor housing **50** can include a first holder **51**, a second holder **53**, and a protective ring **55**. Differences of the wheel hub motor **200** relative to the wheel hub motor **100** of the first embodiment are illustrated as the following. FIG. 8 illustrates that the second holder **53** fails to include an inwardly extending ledge, and an inner diameter of the second holder **53** can be equal to an outer diameter of the motor **70**. Thus, the second holder **53** can only include an outwardly facing ledge **534**, and an annular protrude portion **536** protruding from the outwardly facing ledge **534**. The annular protrude portion **536** can axially define a receiving chamber **5361** running through the second holder **53**. A diameter of the receiving chamber **5361** can be equal to the outer diameter of the motor **70**.

A motor body of the motor **70** can be wholly received in the receiving chamber **5361**. An outer diameter of the protective ring **55** can be larger than the outer diameter of the motor **70**. An inner diameter of the protective ring **55** can be smaller than the outer diameter of the motor **70**. A positioning groove **531** can be defined at an outer wall of the second

5

holder **53**. The positioning groove **531** can be configured to detachably couple a positioning protrusion **551** of the protective ring **55**. In the second embodiment, the protective ring **55** can prevent the motor **70** from dropping out of the motor housing **50**. In the illustrated embodiment, a diameter of a rotatable shaft **72** of the motor **70** can be smaller than the inner diameter of the protective ring **55**. The inner diameter of the protective ring **55** can be larger than double of the diameter of the rotatable shaft **72**. The positioning groove **531** can be defined at the outwardly facing ledge **534** of the second holder **53**.

The motor **70** of the wheel hub motor **200** can also be replaced easily. In an alternative embodiment, the first holder **51** can be fixedly coupled to the second holder **53**. Then the motor **70** can be put into the motor housing **50** from the receiving chamber **5361** when the protective ring **55** being detached away.

The embodiments shown and described above are only examples. Many details are often found in the art such as the other features of a wheel hub motor and a motor housing. Therefore, many such details are neither shown nor described. Even though numerous characteristics and advantages of the present technology have been set forth in the foregoing description, together with details of the structure and function of the present disclosure, the disclosure is illustrative only, and changes may be made in the details, including in matters of shape, size, and arrangement of the parts within the principles of the present disclosure, up to and including the full extent established by the broad general meaning of the terms used in the claims. It will therefore be appreciated that the embodiments described above may be modified within the scope of the claims.

What is claimed is:

1. A wheel hub motor, comprising:
 - a motor housing, comprising:
 - a first holder, comprising
 - an inwardly extending ledge;
 - an outwardly facing ledge positioned at an outer periphery of the inwardly extending ledge and coaxial with the inwardly extending ledge, and
 - an annular protrude portion substantially perpendicularly protruding from a boundary of the inwardly extending ledge and the outwardly facing ledge, wherein the annular protrude portion comprises an inner wall, an outer wall, and an end wall, the inner wall and the outer wall are concentric ring walls, the end wall is substantially perpendicular to the inner wall and the outer wall, a convex protrudes from the end wall;
 - a second holder detachably coupled to the convex of the first holder, and
 - a protective ring detachably coupled to the second holder, wherein the second holder is positioned between the first holder and the protective ring; and
 - a motor comprising:
 - a motor body received between the first holder and the second holder, and blocked by the inwardly extending ledge, and
 - a rotatable shaft protruding from the motor body and extending out from the protective ring.
2. The wheel hub motor of claim **1**, wherein the inwardly extending ledge defines a first through hole, the annular protrude portion defines a first receiving hole, a diameter of the first receiving hole is greater than a diameter of the first through hole, the diameter of the first receiving hole is substantially equal to an outer diameter of the motor.

6

3. The wheel hub motor of claim **1**, wherein the outwardly facing ledge defines a plurality of coupling holes arranged around a periphery of the outwardly facing ledge.

4. The wheel hub motor of claim **1**, wherein the second holder comprises:

- an inwardly extending ledge configured to block the motor,
- an outwardly facing ledge positioned at an outer periphery of the inwardly extending ledge and coaxial with the inwardly extending ledge, and
- an annular protrude portion substantially perpendicularly protruding from a boundary of the inwardly extending ledge and the outwardly facing ledge, the annular protrude portion defines a latching groove for detachably latching the convex of the first holder.

5. The wheel hub motor of claim **4**, wherein the inwardly extending ledge of the second holder defines a positioning groove, a positioning protrusion protrudes from the protective ring, the positioning protrusion is detachably latched to the positioning groove.

6. The wheel hub motor of claim **1**, wherein the second holder comprises:

- an outwardly facing ledge, and
- an annular protrude portion protruding from the outwardly facing ledge, the annular protrude portion axially defines a receiving chamber, a diameter of the receiving chamber is substantially equal to an outer diameter of the motor.

7. The wheel hub motor of claim **1**, wherein an inner diameter of the second holder is substantially equal to an outer diameter of the motor, an outer diameter of the protective ring is greater than the outer diameter of the motor, an inner diameter of the protective ring is smaller than the outer diameter of the motor.

8. A motor housing, comprising:

- a first holder, comprising:
 - an inwardly extending ledge,
 - an outwardly facing ledge positioned at an outer periphery of the inwardly extending ledge and coaxial with the inwardly extending ledge, and
 - an annular protrude portion substantially perpendicularly protruding from a boundary of the inwardly extending ledge and the outwardly facing ledge, wherein the annular protrude portion comprises an inner wall, an outer wall, and an end wall, the inner wall and the outer wall are concentric ring walls, the end wall is substantially perpendicular to the inner wall and the outer wall, a convex protrudes from the end wall;

a second holder detachably coupled to the convex of the first holder, and

- a protective ring detachably coupled to the second holder, wherein the second holder is positioned between the first holder and the protective ring.

9. The motor housing of claim **8**, wherein the inwardly extending ledge defines a first through hole, the annular protrude portion defines a first receiving hole, a diameter of the first receiving hole is greater than a diameter of the first through hole.

10. The motor housing of claim **8**, wherein the second holder comprises:

- an inwardly extending ledge,
- an outwardly facing ledge positioned at an outer periphery of the inwardly extending ledge and coaxial with the inwardly extending ledge, and
- an annular protrude portion substantially perpendicularly protruding from a boundary of the inwardly extending

ledge and the outwardly facing ledge, the annular protrude portion defines a latching groove for detachably latching the convex of the first holder.

11. The motor housing of claim **8**, wherein the second holder comprises: 5

an outwardly facing ledge, and
an annular protrude portion protruding from the outwardly facing ledge, the annular protrude portion axially defines a receiving chamber.

12. The motor housing of claim **11**, wherein an outer diameter of the protective ring is greater than a diameter of the receiving chamber, an inner diameter of the protective ring is smaller than the diameter of the receiving chamber. 10

* * * * *