



US010315727B2

(12) **United States Patent**
Nishimoto

(10) **Patent No.:** **US 10,315,727 B2**

(45) **Date of Patent:** **Jun. 11, 2019**

- (54) **BICYCLE REAR SPROCKET ASSEMBLY** 5,816,377 A * 10/1998 Nakamura B62M 9/10
192/64
- (71) Applicant: **Shimano Inc.**, Sakai, Osaka (JP) 6,264,575 B1 7/2001 Lim et al.
- (72) Inventor: **Naohiro Nishimoto**, Osaka (JP) 2003/0064844 A1 4/2003 Lin
- (73) Assignee: **Shimano Inc.**, Osaka (JP) 2008/0058144 A1* 3/2008 Oseto B62M 9/10
474/160
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 247 days. 2009/0243250 A1 10/2009 Chiang
- 2013/0017914 A1* 1/2013 Braedt B62M 9/10
474/160
- 2017/0057598 A1* 3/2017 Thrash B62M 9/10

* cited by examiner

(21) Appl. No.: **15/434,542**

Primary Examiner — Michael R Mansen

(22) Filed: **Feb. 16, 2017**

Assistant Examiner — Robert T Resse

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Global IP Counselors, LLP

US 2018/0229801 A1 Aug. 16, 2018

(51) **Int. Cl.**
B62M 9/10 (2006.01)
F16H 55/30 (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.**
CPC **B62M 9/10** (2013.01); **F16H 55/30**
(2013.01)

A bicycle rear sprocket assembly is basically provided that includes a first sprocket assembly and a second sprocket assembly. The first sprocket assembly includes at least one first sprocket and a first torque transmitting profile. The second sprocket assembly includes at least one second sprocket and a second torque transmitting profile. The second torque transmitting profile is configured to engage the first torque transmitting profile to transmit torque between the first sprocket assembly and the second sprocket assembly. A threaded portion is provided to one of the first sprocket assembly and the second sprocket assembly. The threaded portion is configured to threadedly engage a bicycle rear hub assembly.


(58) **Field of Classification Search**
CPC B62M 9/10; F16H 55/30
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 4,102,215 A * 7/1978 Nagano B62M 9/10
192/64
- 4,127,038 A * 11/1978 Browning B62M 9/10
280/236

19 Claims, 12 Drawing Sheets

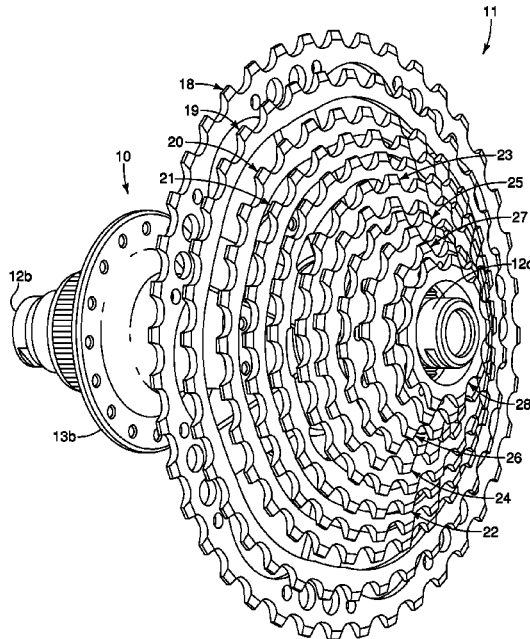

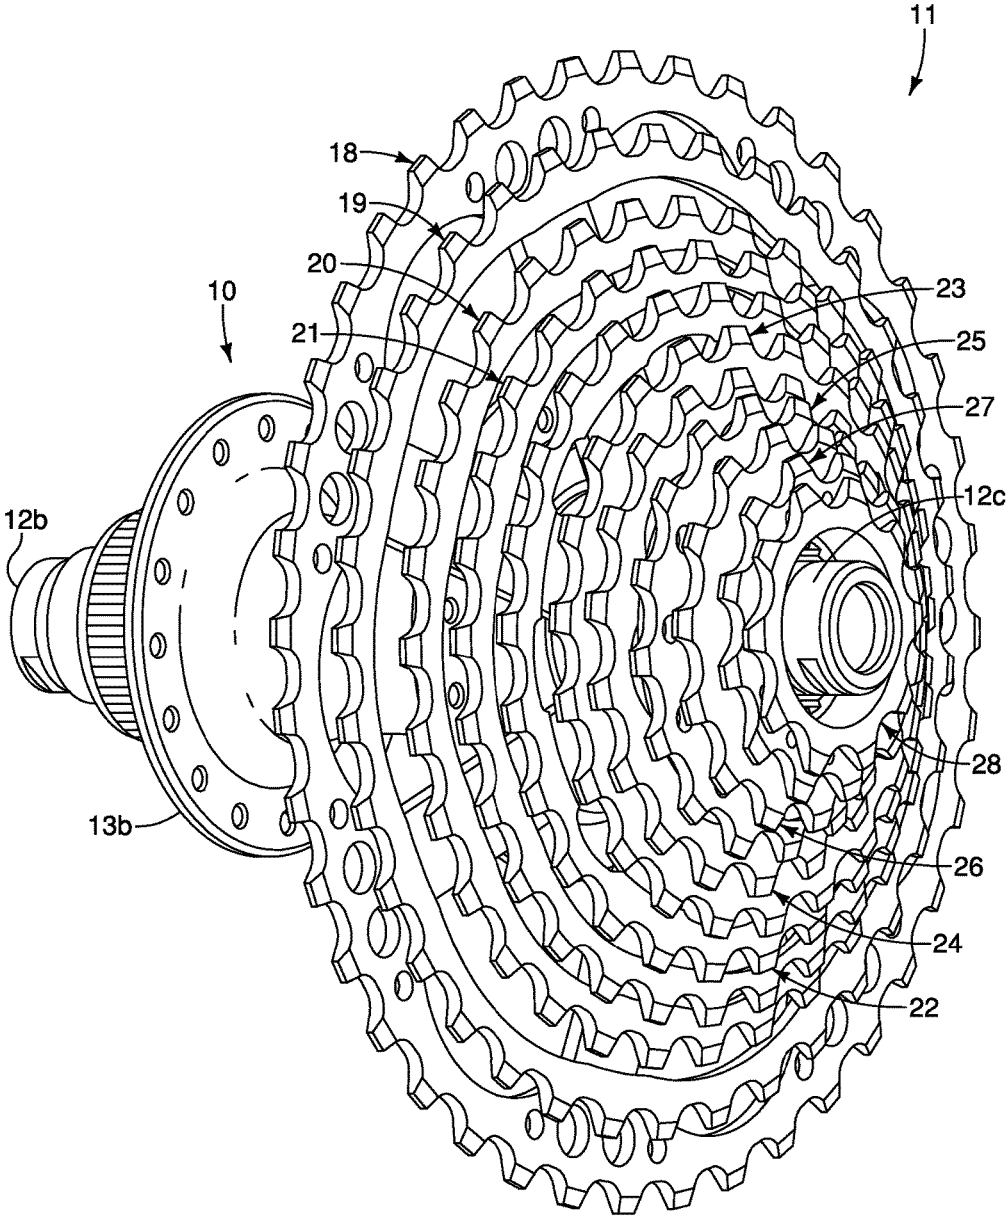


FIG. 1

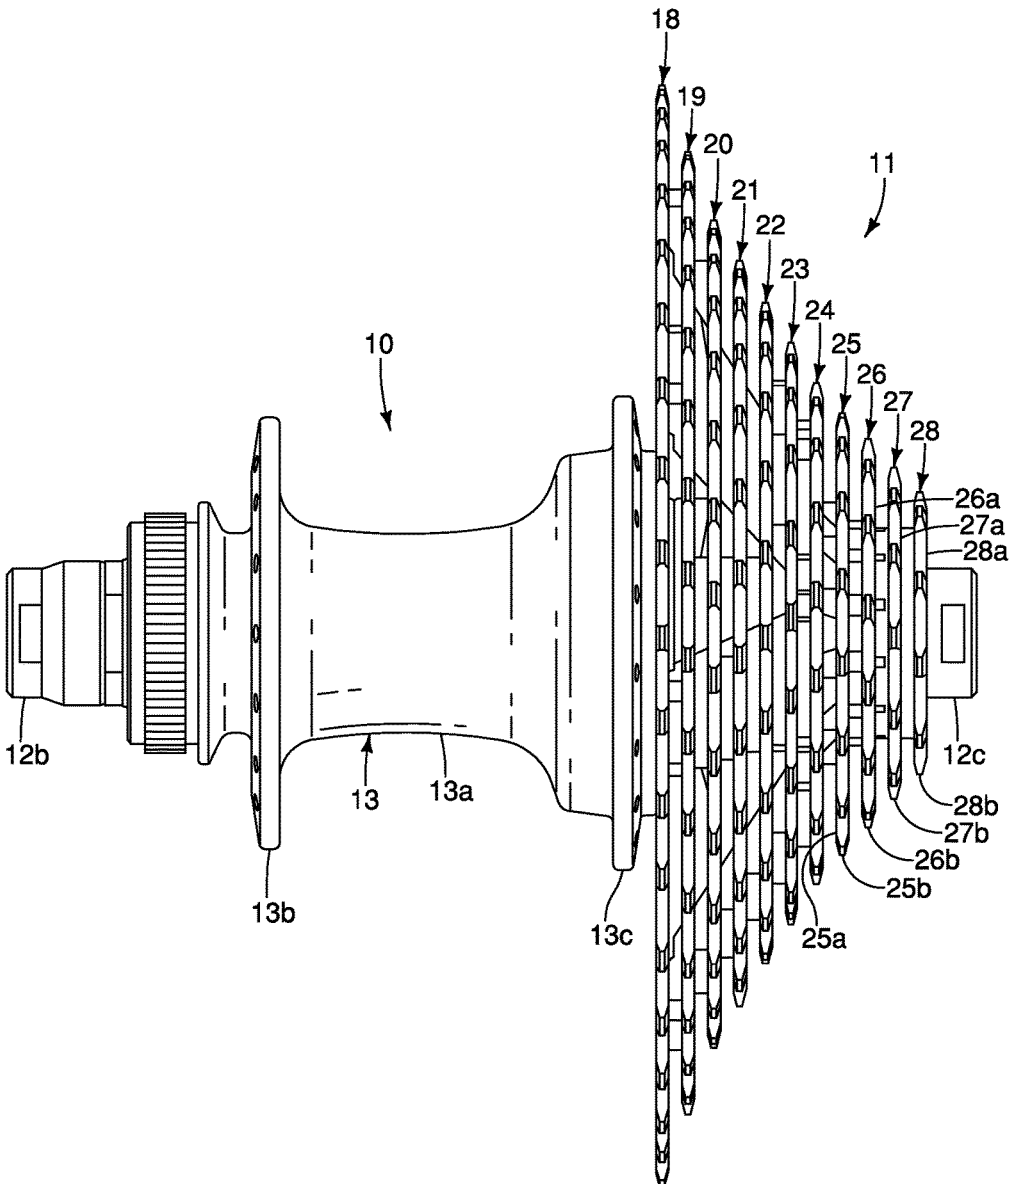


FIG. 2

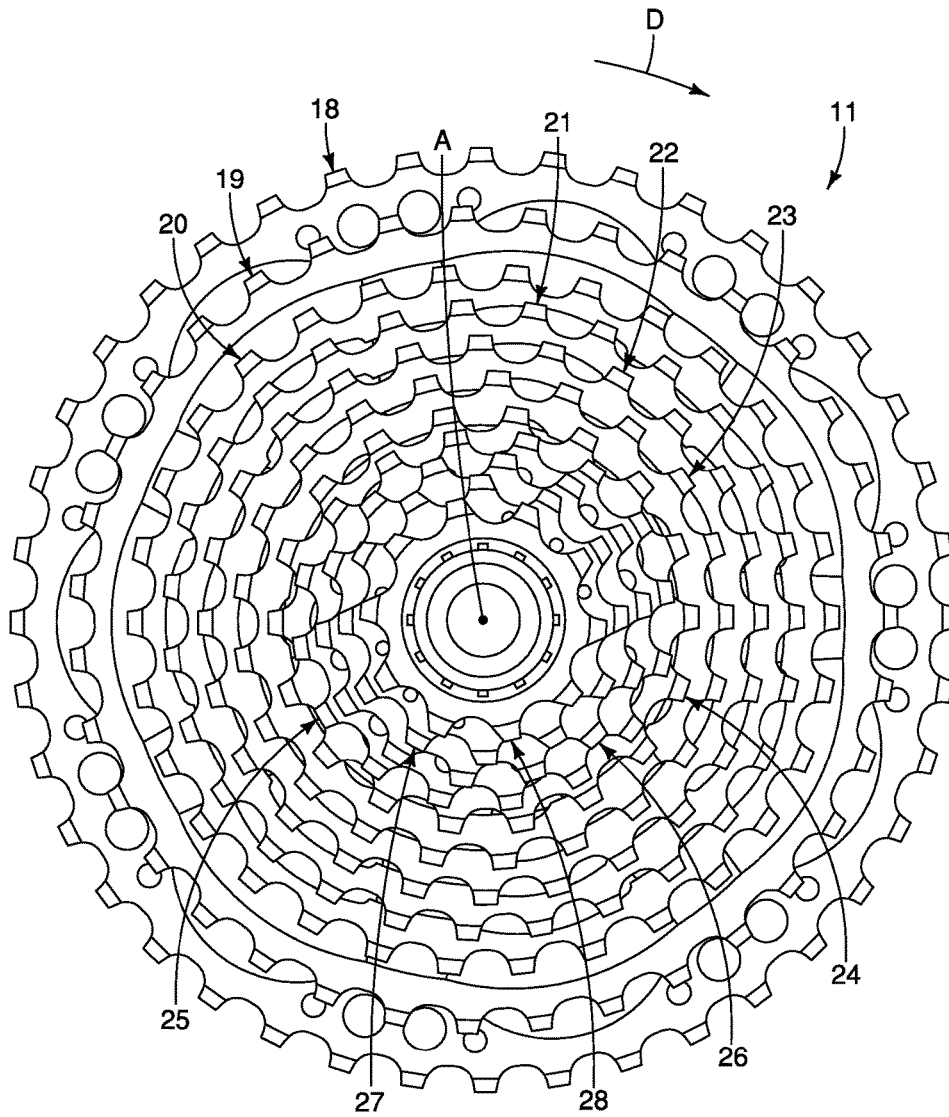


FIG. 3

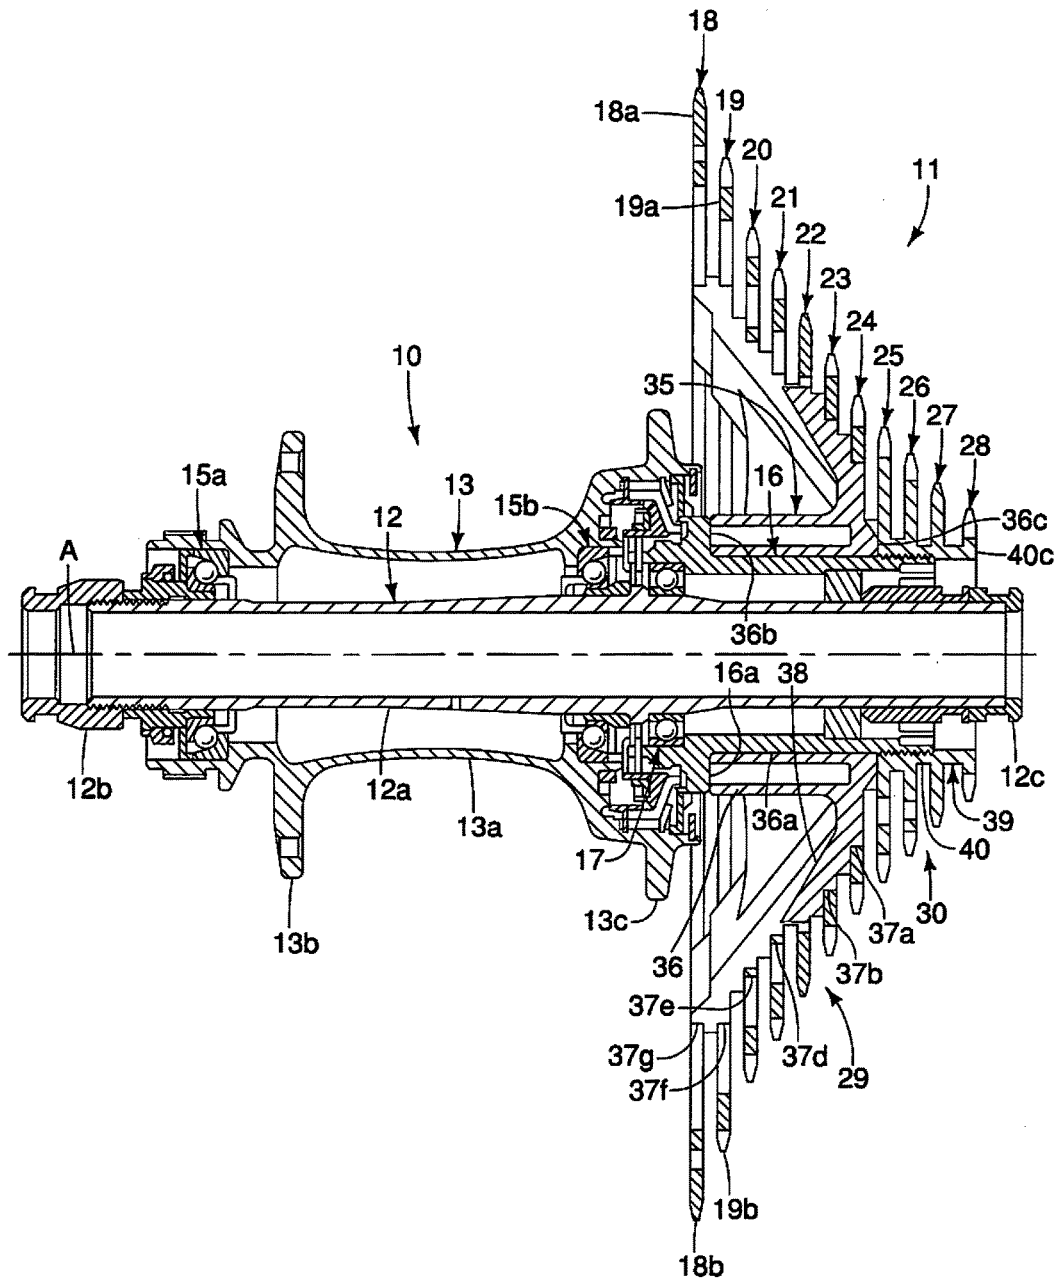


FIG. 4

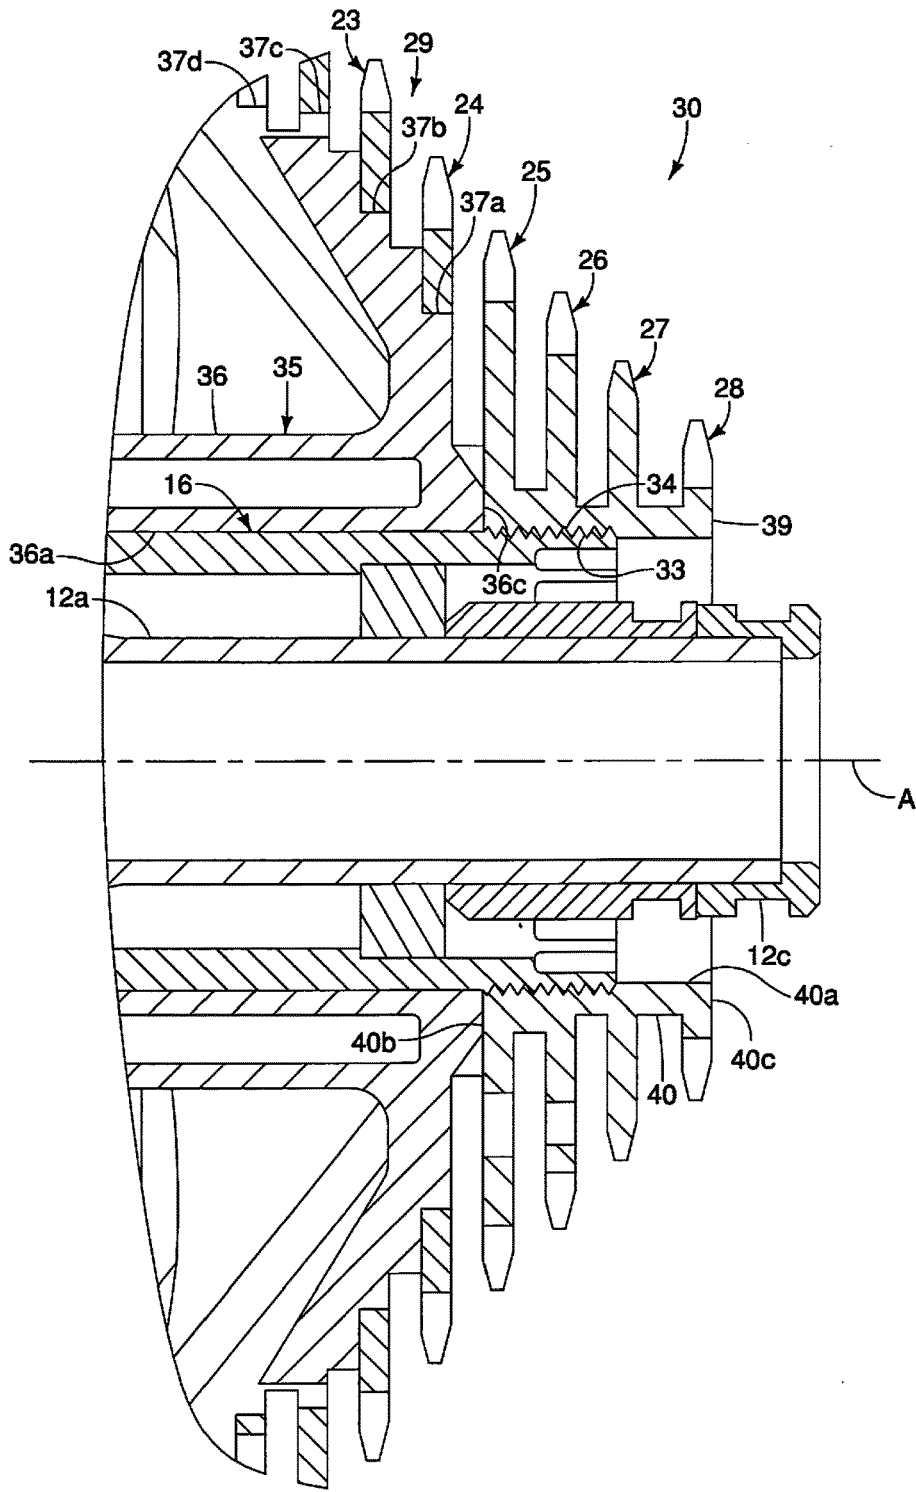


FIG. 5

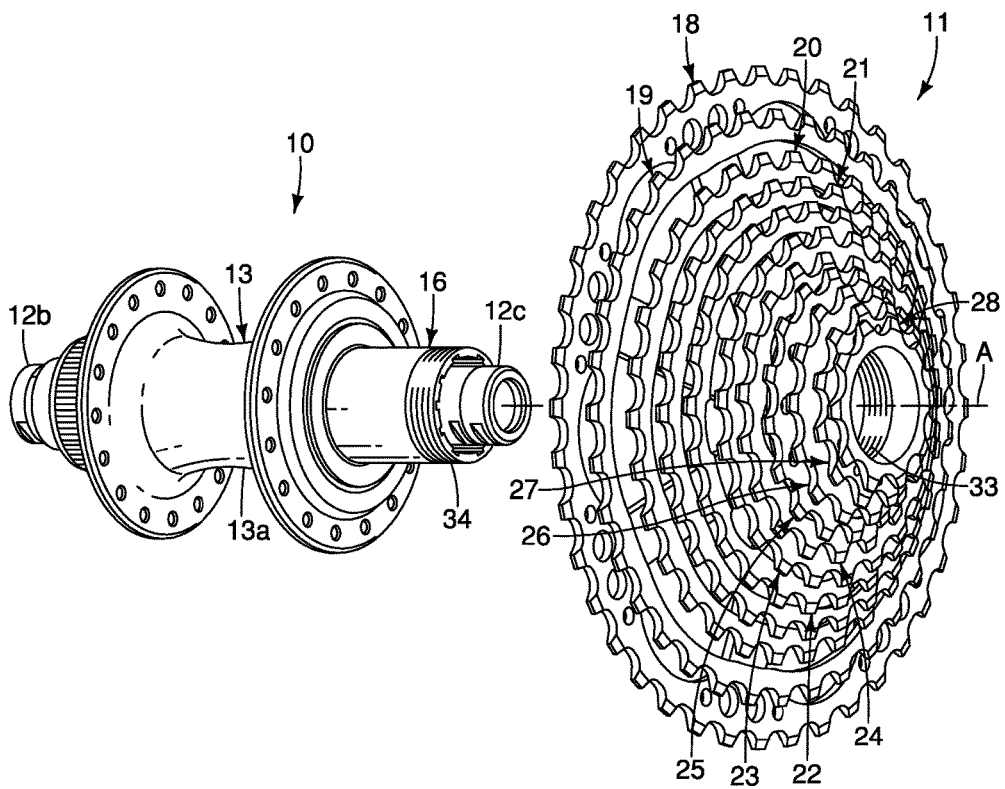


FIG. 6

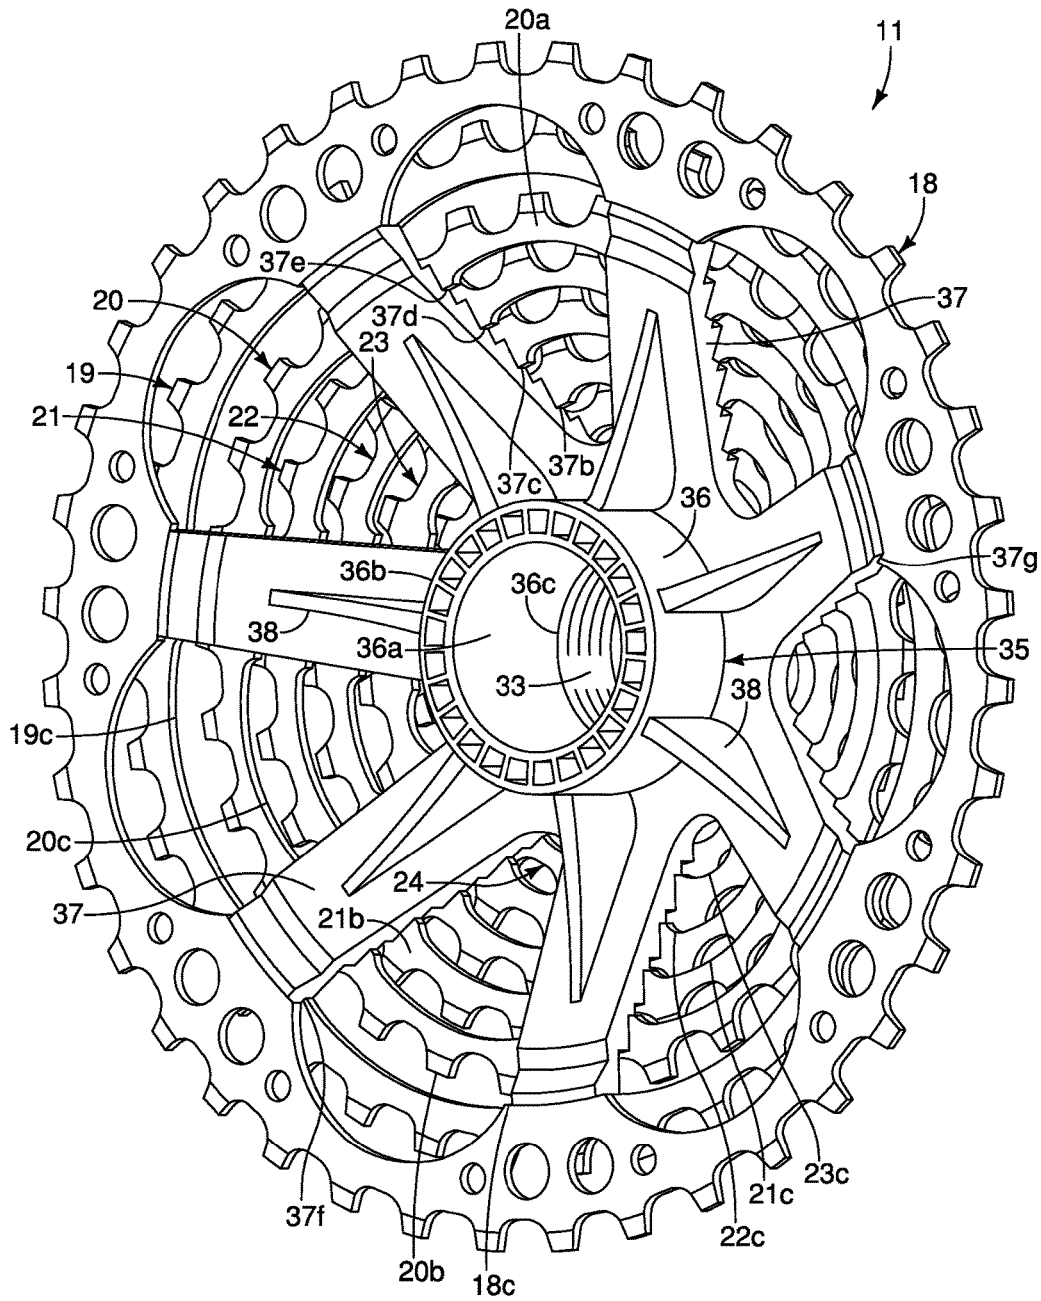


FIG. 7

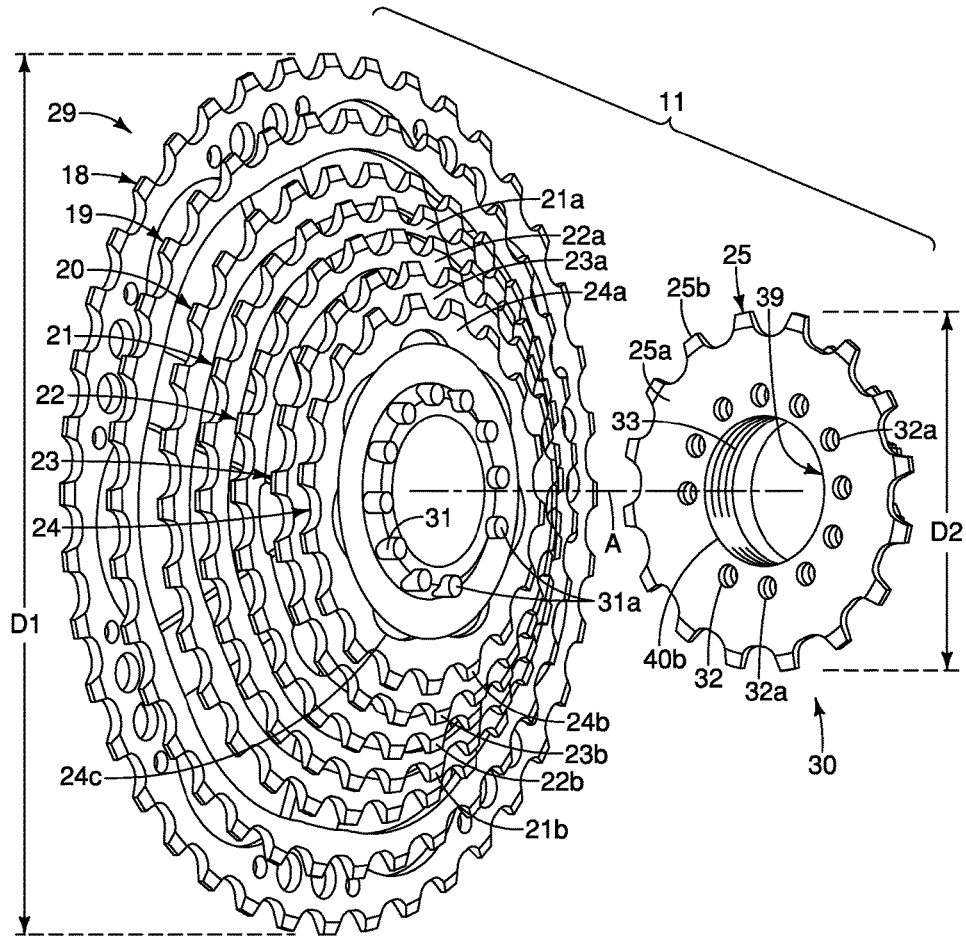


FIG. 8

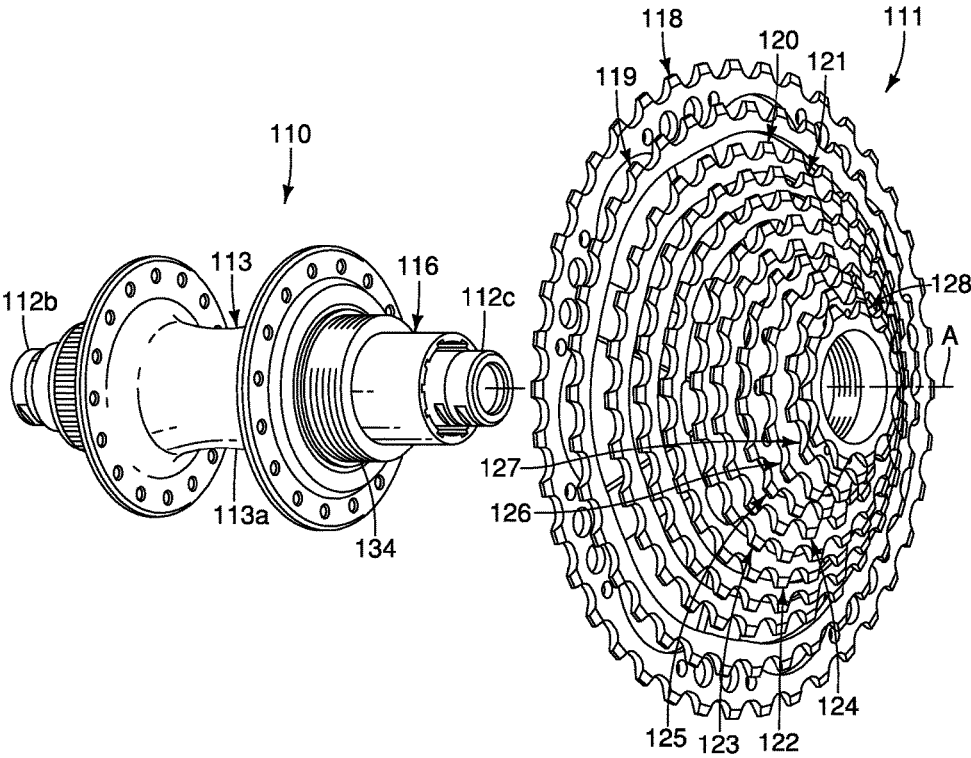


FIG. 9

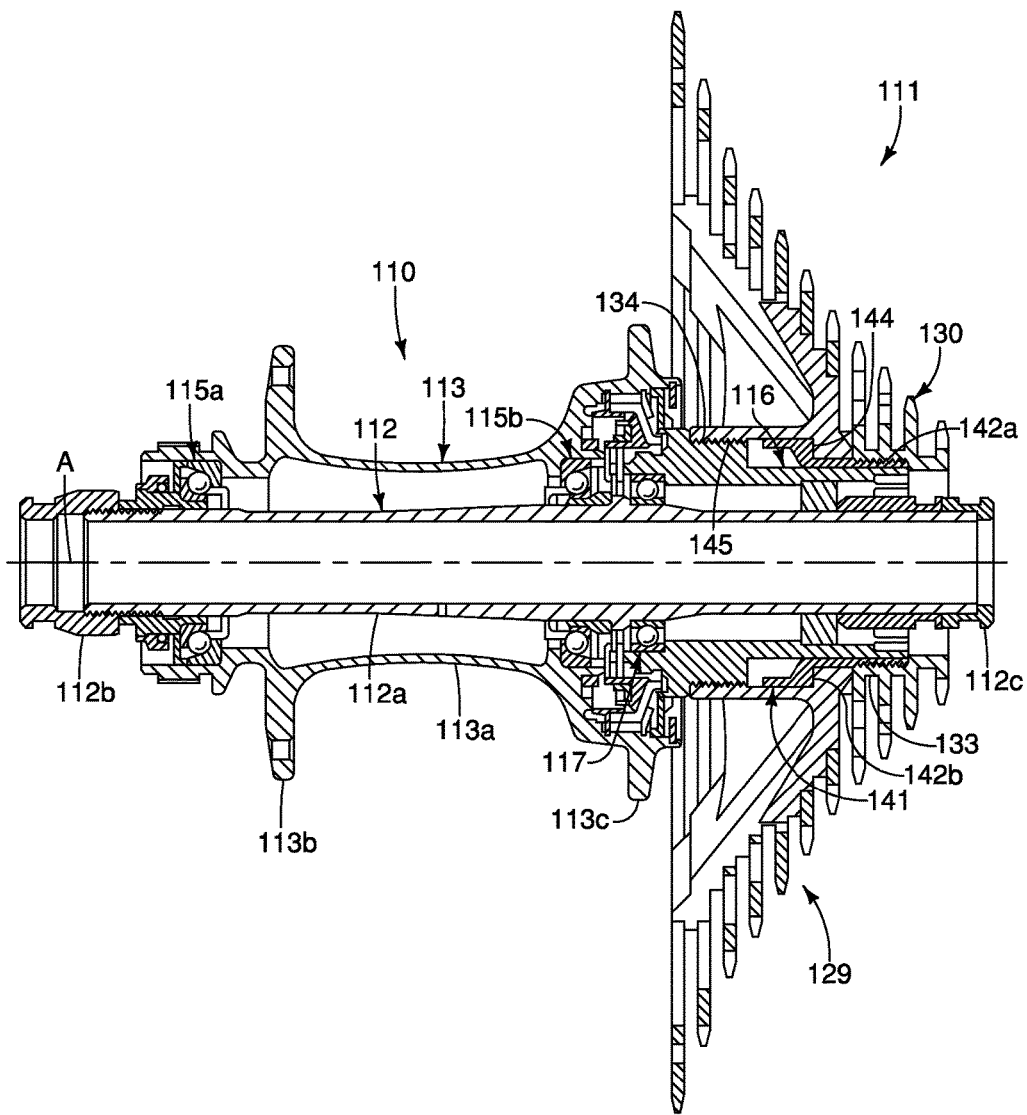


FIG. 10

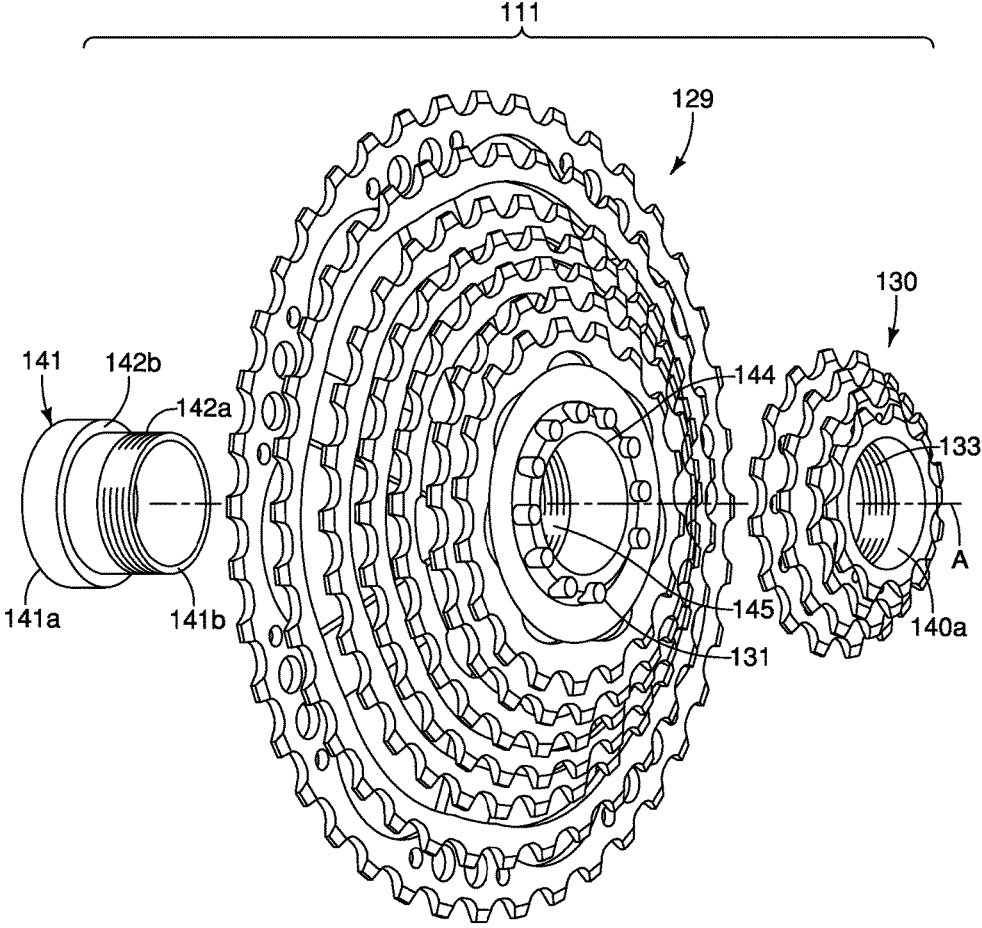


FIG. 11

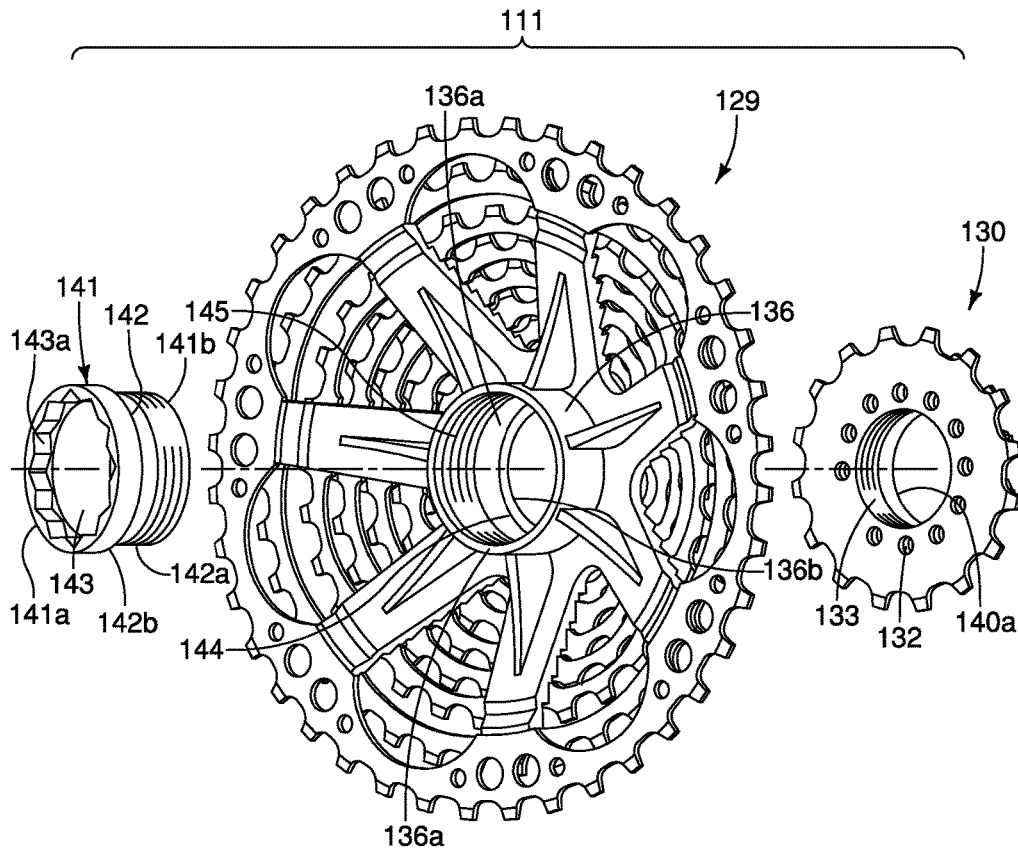


FIG. 12

BICYCLE REAR SPROCKET ASSEMBLY

BACKGROUND

Field of the Invention

This invention generally relates to a bicycle rear sprocket assembly.

Background Information

Bicycling is becoming an increasingly more popular form of recreation, as well as a means of transportation. Moreover, bicycling has become a very popular competitive sport for both amateurs and professionals. Whether the bicycle is used for recreation, transportation or competition, the bicycle industry is constantly improving the various components of the bicycle. One area that has been extensively redesigned over the years is the bicycle drive train. Specifically, manufacturers of bicycle components have been continually improving shifting performance of the various shifting components, such as shifters, derailleurs, chain and sprockets.

One particular component of the bicycle drive train that has been extensively redesigned in the past years is the sprocket assembly.

SUMMARY

Generally, the present disclosure is directed to various features of a bicycle rear sprocket assembly.

In view of the state of the known technology and in accordance with a first aspect of the present disclosure, a bicycle rear sprocket assembly is basically provided that includes a first sprocket assembly and a second sprocket assembly. The first sprocket assembly includes at least one first sprocket and a first torque transmitting profile. The second sprocket assembly includes at least one second sprocket and a second torque transmitting profile. The second torque transmitting profile is configured to engage the first torque transmitting profile to transmit torque between the first sprocket assembly and the second sprocket assembly. A threaded portion is provided to one of the first sprocket assembly and the second sprocket assembly. The threaded portion is configured to threadedly engage a bicycle rear hub assembly. According to the first aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with a second aspect of the present invention, the bicycle rear sprocket assembly according to the first aspect is configured so that the at least one first sprocket includes a plurality of first sprockets. According to the second aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with a third aspect of the present invention, the bicycle rear sprocket assembly according to the first or second aspect is configured so that the at least one second sprocket includes a plurality of second sprockets. According to the third aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a sprocket assembly including a plurality of sprockets to a bicycle rear hub assembly without forming splines.

In accordance with a fourth aspect of the present invention, the bicycle rear sprocket assembly according to any one of the first to third aspects is configured so that one of the first torque transmitting profile and the second torque transmitting profile includes at least one projection, the other of the first torque transmitting profile and the second torque transmitting profile includes at least one recess configured to receive the at least one projection. According to the fourth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket assembly and a second sprocket assembly.

In accordance with a fifth aspect of the present invention, the bicycle rear sprocket assembly according to the fourth aspect is configured so that the at least one projection extends in an axial direction parallel to a rotational center axis of the bicycle rear sprocket assembly, and the at least one recess extends in the axial direction. According to the fifth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to downsize a bicycle rear sprocket assembly in a radial direction with respect to a rotational center axis of the bicycle rear sprocket assembly.

In accordance with a sixth aspect of the present invention, the bicycle rear sprocket assembly according to the fourth or fifth aspects is configured such that the at least one projection includes a plurality of projections and the at least one recess includes a plurality of recesses. According to the sixth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket assembly and a second sprocket assembly.

In accordance with a seventh aspect of the present invention, the bicycle rear sprocket assembly according to the sixth aspect is configured such that the plurality of projections are circumferentially spaced on the one of the first torque transmitting profile and the second torque transmitting profile, and the plurality of recesses are circumferentially spaced on the other of the first torque transmitting profile and the second torque transmitting profile. According to the seventh aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket assembly and a second sprocket assembly.

In accordance with an eighth aspect of the present invention, the bicycle rear sprocket assembly according to any one of the first to seventh aspects is configured to include a connecting member configured to connect the first sprocket assembly and the second sprocket assembly. According to the eighth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to unitize a first sprocket assembly and a second sprocket assembly.

In accordance with a ninth aspect of the present invention, the bicycle rear sprocket assembly according to the eighth aspect is configured so that the connecting member includes a tool engaging profile. According to the ninth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to unitize a first sprocket assembly and a second sprocket assembly by using a tool.

In accordance with a tenth aspect of the present invention, the bicycle rear sprocket assembly according to the ninth aspect is configured so that the tool engaging profile is disposed on an inner surface of the connecting member. According to the tenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to downsize a bicycle rear sprocket assembly.

3

In accordance with an eleventh aspect of the present invention, the bicycle rear sprocket assembly according to any one of the eighth to tenth aspects is configured such that one of the first sprocket assembly and the second sprocket assembly has a first threaded part, and the connecting member includes a second threaded part configured to threadedly engage the first threaded part. According to the eleventh aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively unitize a first sprocket assembly and a second sprocket assembly.

In accordance with a twelfth aspect of the present invention, the bicycle rear sprocket assembly according to the eleventh aspect is configured such that the second threaded part is disposed on an outer surface of the connecting member. According to the twelfth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to downsize a bicycle rear sprocket assembly.

In accordance with a thirteenth aspect of the present invention, the bicycle rear sprocket assembly according to the eleventh or twelfth aspect is configured such that the other of the first sprocket assembly and the second sprocket assembly has a first axial abutment surface, and the connecting member includes a second axial abutment surface configured to contact the first axial abutment surface. According to the thirteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively unitize a first sprocket assembly and a second sprocket assembly.

In accordance with a fourteenth aspect of the present invention, the bicycle rear sprocket assembly according to any of the first to thirteenth aspects is configured such that the at least one first sprocket has a first sprocket diameter, and the at least one second sprocket has a second sprocket diameter that is smaller than the first sprocket diameter. According to the fourteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with a fifteenth aspect of the present invention, the bicycle rear sprocket assembly according to any of the first to fourteenth aspects is configured such that the threaded portion is provided to the first sprocket assembly. According to the fifteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with a sixteenth aspect of the present invention, the bicycle rear sprocket assembly according to any of the first to fourteenth aspects is configured such that the threaded portion is provided to the second sprocket assembly. According to the sixteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with a seventeenth aspect of the present invention, a bicycle rear sprocket assembly is provided that basically includes a first sprocket and a second sprocket. The first sprocket includes a first sprocket body, a plurality of first sprocket teeth provided to a first outer periphery of the first sprocket body, and a first torque transmitting profile. The second sprocket includes a second sprocket body, a plurality of second sprocket teeth provided to a second outer periphery of the second sprocket body, and a second torque transmitting profile. The second torque transmitting profile is configured to engage the first torque transmitting profile to

4

transmit torque between the first sprocket and the second sprocket. A threaded portion is provided to one of the first sprocket body and the second sprocket body. According to the seventeenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to mount a bicycle rear sprocket assembly to a bicycle rear hub assembly without forming splines.

In accordance with an eighteenth aspect of the present invention, the bicycle rear sprocket assembly according to the seventeenth aspect is configured such that one of the first torque transmitting profile and the second torque transmitting profile includes at least one projection, and the other of the first torque transmitting profile and the second torque transmitting profile includes at least one recess configured to receive the at least one projection. According to the eighteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket and a second sprocket.

In accordance with a nineteenth aspect of the present invention, the bicycle rear sprocket assembly according to the eighteenth aspect is configured such that the at least one projection extends in an axial direction parallel to a rotational center axis of the bicycle rear sprocket assembly, and the at least one recess extends in the axial direction. According to the nineteenth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to downsize a bicycle rear sprocket assembly in a radial direction with respect to a rotational center axis of the bicycle rear sprocket assembly.

In accordance with a twentieth aspect of the present invention, the bicycle rear sprocket assembly according to the eighteenth or nineteenth aspect is configured such that the at least one projection includes a plurality of projections, and the at least one recess includes a plurality of recesses. According to the twentieth aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket and a second sprocket.

In accordance with a twenty-first aspect of the present invention, the bicycle rear sprocket assembly according to the twentieth aspect is configured such that the plurality of projections are circumferentially spaced on the one of the first torque transmitting profile and the second torque transmitting profile, and the plurality of recesses are circumferentially spaced on the other of the first torque transmitting profile and the second torque transmitting profile. According to the twenty-first aspect of the present invention, a bicycle rear sprocket assembly is provided in which it is possible to effectively transmit torque between a first sprocket and a second sprocket.

Also other objects, features, aspects and advantages of the disclosed bicycle rear sprocket assembly will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses exemplary embodiments of the bicycle rear sprocket assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the attached drawings which form a part of this original disclosure:

FIG. 1 is a perspective view of a bicycle rear sprocket assembly mounted to a bicycle rear hub assembly in accordance with one illustrated embodiment;

FIG. 2 is a rear elevational view of the rear hub assembly and the rear sprocket assembly of FIG. 1;

5

FIG. 3 is a side elevational view of the rear hub assembly and the rear sprocket assembly of FIG. 1;

FIG. 4 is a rear elevational view in cross section of the rear hub assembly and the rear sprocket assembly of FIG. 2;

FIG. 5 is an enlarged rear elevational view in cross section of the rear sprocket assembly threadably engaging the rear hub assembly of FIG. 4;

FIG. 6 is an exploded perspective view of the rear hub assembly and the rear sprocket assembly of FIG. 1;

FIG. 7 is a rear perspective view of the rear hub assembly and the rear sprocket assembly of FIG. 6;

FIG. 8 is an exploded perspective view of the bicycle rear sprocket assembly of FIG. 7;

FIG. 9 is an exploded perspective view of a bicycle rear hub assembly and a bicycle rear sprocket assembly in accordance with another illustrated embodiment of the present invention;

FIG. 10 is a rear elevational view in cross section of the rear sprocket assembly mounted to the rear hub assembly of FIG. 9;

FIG. 11 is an exploded front perspective view of the rear hub assembly of FIG. 9; and

FIG. 12 is an exploded rear perspective view of the rear hub assembly of FIG. 9.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Selected exemplary embodiments will now be explained with reference to the drawings. It will be apparent to those skilled in the bicycle field from this disclosure that the following descriptions of the exemplary embodiments are provided for illustration only and not for the purpose of limiting the invention as defined by the appended claims and their equivalents.

Because the various parts of a bicycle are well known in the bicycle art, these parts of the bicycle will not be discussed or illustrated in detail herein, except as they are modified in accordance with the exemplary embodiments of the present invention. It will be apparent to those skilled in the bicycle field from this disclosure that a bicycle rear sprocket assembly in accordance with the exemplary embodiments of the present invention can have a different number of sprockets.

Referring initially to FIGS. 1, 2 and 4, a bicycle rear hub assembly 10 is illustrated to which a bicycle rear sprocket assembly 11 in accordance with a first exemplary embodiment is mounted. The bicycle rear hub assembly 10 basically comprises a hub axle 12 and a hub shell 13. The hub axle 12 is a conventional member having a shaft portion 12a with a first end cap 12b connected to a first end of the hub axle 12 and a second end cap 12c connected to a second end of the hub axle 12. The hub axle 12 defines a rotational center axis A. The hub shell 13 is rotatably mounted on the hub axle 12 to rotate around the center rotational axis A. The hub shell 13 has a center tubular body 13a and a pair of spoke attachment flanges 13b and 13c extending outwardly in a radial direction from the center tubular body 13a.

As shown in FIG. 4, at least one bearing assembly is provided for rotatably supporting the hub shell 13 on the hub axle 12. In the illustrated exemplary embodiment, the hub shell 13 is rotatably mounted on the hub axle 12 by a pair of bearing assemblies 15a and 15b. The bearing assemblies 15a and 15b are conventional parts that are well known in the bicycle field, and thus, the bearing assemblies 15a and 15b

6

will not be discussed or illustrated in detail herein. Also, other bearing arrangements can be used as needed and/or desired.

Referring now to FIG. 4, the bicycle rear hub assembly 10 further comprises a sprocket support body 16. At least one bearing assembly 17 is provided for rotatably supporting the sprocket support body 16 on the hub axle 12. In the illustrated exemplary embodiment, the sprocket support body 16 is rotatably mounted on the hub axle 12 by the bearing assembly 17, although any suitable number of bearing assemblies can be used. Coasting or freewheeling occurs when the sprocket support body 16 stops rotating or moves in a non-driving rotational direction (i.e., counter-clockwise about the rotational center axis A as viewed from the sprocket support body side of the bicycle rear hub assembly 10) while the hub shell 13 rotates in a driving rotational direction (i.e., clockwise about the rotational center axis A as viewed from the sprocket support body side of the bicycle rear hub assembly 10).

Referring to FIGS. 1 to 8, a bicycle rear sprocket assembly 11 is illustrated in accordance with a first exemplary embodiment of the present invention. As shown in FIGS. 1-4 and 6, the bicycle rear sprocket assembly 11 includes eleven sprockets 18 to 28. The sprockets 18 to 28 are axially spaced from each other at predetermined intervals. The sprockets 18 to 28 are configured to be fixedly mounted on the bicycle rear hub assembly 10 such that the sprockets 18 to 28 are configured to rotate together about the rotational center axis A. The sprockets 18 to 28 typically rotate together in a forward rotational direction D (e.g., in a clockwise direction as viewed in FIG. 3) when the rider is pedaling in a forward (clockwise) direction to propel the bicycle in a forward direction. It will be apparent to those skilled in the bicycle art from this disclosure that the rear sprocket assembly can have fewer or more sprockets.

As shown in FIGS. 1 and 2, the sprockets 18 to 28 are hard, rigid disc shaped members formed from a suitable material, such as a metallic material. In the illustrated exemplary embodiment, the sprockets 18 to 28 are each a one-piece, unitary member formed of a metallic material that is suitable for a bicycle sprocket. The sprockets 18 to 28 can include modified teeth, such as teeth having inclined surfaces, and/or recesses to facilitate downshifting and upshifting operations.

As shown in FIGS. 4, 5 and 8, the bicycle rear sprocket assembly 11 includes a first sprocket assembly 29 and a second sprocket assembly 30. The first sprocket assembly 29 includes at least one first sprocket, such as sprocket 18, and a first torque transmitting profile 31. The second sprocket assembly 30 includes at least one second sprocket, such as sprocket 25, and a second torque transmitting profile 32. The second torque transmitting profile 32 is configured to engage the first torque transmitting profile 31 to transmit torque between the first sprocket assembly 29 and the second sprocket assembly 30. A threaded portion is provided to one of the first sprocket assembly 29 and the second sprocket assembly 30. The threaded portion is configured to threadably engage a bicycle rear hub assembly 10. As shown in FIG. 5, a threaded portion 33 is provided to the second sprocket assembly 30 that engages a corresponding threaded portion 34 of the sprocket support body 16 of the bicycle rear hub assembly 10.

In other words, a first sprocket includes a first torque transmitting profile, and a second sprocket includes a second torque transmitting profile, as shown in FIGS. 8, 11 and 12. The second torque transmitting profile is configured to engage the first torque transmitting profile to transmit torque

between the first sprocket and the second sprocket. A threaded portion, such as threaded portion **34** (FIG. **5**) and threaded portion **145** (FIG. **10**), is provided to one of the first sprocket body and the second sprocket body.

As shown in FIGS. **4**, **5** and **8**, the first sprocket assembly **29** includes a plurality of first sprockets supported by a first sprocket support member **35**. In the illustrated embodiment, the first sprocket assembly **29** includes seven first sprockets, i.e., sprockets **18-24**, although the first sprocket assembly **29** can be configured to receive any suitable number of sprockets.

The first sprocket support member **35** includes a tubular body **36** and a plurality of support arms **37** extending outwardly in a radial direction from the tubular body **36**, as shown in FIGS. **4** and **5**. The tubular body **36** has a bore **36a** configured to receive the sprocket support body **16**. The bore **36a** extends from a first end **36b** of the tubular body **36** to a second end **36c** thereof. A reinforcing member **38** extends between the tubular body **36** and each of the support arms **37**, as shown in FIGS. **4** and **7**, to strengthen the support arms **37**. As shown in FIG. **7**, the illustrated embodiment has seven support arms **37**, although any suitable number of support arms can be used.

A distal end portion of each of the support arms **37** is disposed closer to the spoke attachment flange **13c** than the first end **36b** of the tubular body **36** of the first sprocket support member **35** when the first sprocket assembly **29** is received by the sprocket support body **16**. As shown in FIGS. **4**, **5** and **7**, a plurality of shoulders **37a-37g** are provided on each support arm **37**. Each of the shoulders **37a-37g** is configured to receive one of the first sprockets **18-24**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **18** basically has a sprocket body **18a** and a plurality of first sprocket teeth **18b** provided to a first outer periphery of the sprocket body **18a**. The plurality of teeth **18b** are circumferentially spaced and extend radially and outwardly from the first outer periphery of the sprocket body **18a**. The sprocket body **18a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **19**) and a second axial side or large sprocket side that faces the spoke attachment flange **13c**. The center of the sprocket **18** is provided with a sprocket attachment portion **18c** that is configured to be mounted on the shoulders **37g** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **18c** preferably has a non-circular shape. Preferably, the sprocket **18** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **18** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **19** basically has a sprocket body **19a** and a plurality of sprocket teeth **19b** provided to an outer periphery of the sprocket body **19a**. The plurality of teeth **19b** are circumferentially spaced and extend radially and outwardly from the outer periphery of the sprocket body **19a**. The sprocket body **19a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **20**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **18**). The center of the sprocket **19** is provided with a sprocket attachment portion **19c** that is configured to be mounted on the shoulders **37f** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS.

7 and **8**, the sprocket attachment portion **19c** preferably has a non-circular shape. Preferably, the sprocket **19** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **19** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **20** basically has a sprocket body **20a** and a plurality of circumferentially spaced teeth **20b** extending radially and outwardly from an outer periphery of the sprocket body **20a**. The sprocket body **20a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **21**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **19**). The center of the sprocket **20** is provided with a sprocket attachment portion **20c** that is configured to be mounted on the shoulders **37e** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **20c** preferably has a non-circular shape. Preferably, the sprocket **20** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **20** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **21** basically has a sprocket body **21a** and a plurality of circumferentially spaced teeth **21b** extending radially and outwardly from an outer periphery of the sprocket body **21a**. The sprocket body **21a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **22**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **20**). The center of the sprocket **21** is provided with a sprocket attachment portion **21c** that is configured to be mounted on the shoulders **37d** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **21c** preferably has a non-circular shape. Preferably, the sprocket **21** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **21** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **22** basically has a sprocket body **22a** and a plurality of circumferentially spaced teeth **22b** extending radially and outwardly from an outer periphery of the sprocket body **22a**. The sprocket body **22a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **23**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **21**). The center of the sprocket **22** is provided with a sprocket attachment portion **22c** that is configured to be mounted on the shoulders **37c** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **22c** preferably has a non-circular shape. Preferably, the sprocket **22** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **22** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **23** basically has a sprocket body **23a** and a plurality of circumferentially spaced teeth **23b** extending radially and outwardly from an outer periphery of the sprocket body **23a**.

The sprocket body **23a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **24**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **22**). The center of the sprocket **23** is provided with a sprocket attachment portion **23c** that is configured to be mounted on the shoulders **37b** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **23c** preferably has a non-circular shape. Preferably, the sprocket **23** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **23** to the first sprocket support member **35**.

Referring now to FIGS. **4**, **7** and **8**, the sprocket **24** basically has a sprocket body **24a** and a plurality of circumferentially spaced teeth **24b** extending radially and outwardly from an outer periphery of the sprocket body **24a**. The sprocket body **24a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **25**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **23**). The center of the sprocket **24** is provided with a sprocket attachment portion **24c** that is configured to be mounted on the shoulders **37a** of the support arms **37** of the first sprocket support member **35** of the bicycle rear sprocket assembly **11** in a conventional manner. As shown in FIGS. **7** and **8**, the sprocket attachment portion **24c** preferably has a non-circular shape. Preferably, the sprocket **24** is mounted on the arms **37** of the first sprocket support member **35** by diffusion bonding or with an adhesive. Alternatively, a mechanical fastener, such as a rivet, can be used to secure the sprocket **24** to the first sprocket support member **35**.

As shown in FIGS. **4**, **5** and **8**, the second sprocket assembly **30** includes a plurality of second sprockets supported by a second sprocket support member **39**. In the illustrated embodiment, the second sprocket assembly **30** includes four second sprockets, i.e., sprockets **25-28**, although the second sprocket assembly **30** can include any suitable number of sprockets.

The second sprocket support member **39** includes a tubular body **40** having a bore **40a** extending from a first end **40b** to a second end **40c**, as shown in FIGS. **4**, **5** and **8**. The bore **40a** is configured to receive the sprocket support body **16**. The threaded portion **33** is provided to a portion of the bore **40a**. The second sprockets, e.g., sprockets **25-28**, are preferably integrally formed with the tubular body **40**, such that the second sprocket assembly **30** is formed as a one-piece member. Alternatively, the second sprocket support member **39** can be configured substantially similarly as the first sprocket support member **35** such that each of the second sprockets is separately formed and attached to the second sprocket support member.

Referring now to FIGS. **2** and **8**, the sprocket **25** basically has a sprocket body **25a** and a plurality of sprocket teeth **25b** provided to an outer periphery of the sprocket body **25a**. The plurality of sprocket teeth **25b** are circumferentially spaced and extend radially and outwardly from an outer periphery of the sprocket body **25a**. The sprocket body **25a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **26**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **24**).

Referring now to FIGS. **2** and **3**, the sprocket **26** basically has a sprocket body **26a** and a plurality of circumferentially spaced teeth **26b** extending radially and outwardly from an

outer periphery of the sprocket body **26a**. The sprocket body **26a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **27**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **25**).

Referring now to FIGS. **2** and **3**, the sprocket **27** basically has a sprocket body **27a** and a plurality of circumferentially spaced teeth **27b** extending radially and outwardly from an outer periphery of the sprocket body **27a**. The sprocket body **27a** has a first axial side or small sprocket side that faces the next smaller sprocket (sprocket **28**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **26**).

Referring now to FIGS. **2** and **3**, the sprocket **28** basically has a sprocket body **28a** and a plurality of circumferentially spaced teeth **28b** extending radially and outwardly from an outer periphery of the sprocket body **28a**. The sprocket body **28a** has a first axial side or small sprocket side that faces in an outbound direction of the bicycle (e.g., toward the second end cap **12c**) and a second axial side or large sprocket side that faces the next larger sprocket (sprocket **27**).

Referring to FIG. **8**, the at least one first sprocket (e.g., sprocket **18**) has a first sprocket diameter **D1**, and the at least one second sprocket (e.g., sprocket **25**) has a second sprocket diameter **D2**. The second sprocket diameter **D2** is smaller than the first sprocket diameter **D1**. As shown in FIGS. **2** to **4**, the sprockets **18-28** have decreasing diameters moving in the outbound direction (e.g., away from the spoke attachment flange **13c**) from sprocket **18** to sprocket **28**.

Referring to FIGS. **4** and **5**, the first sprocket assembly **29** is connected to the bicycle rear hub assembly **10** such that the first sprocket support member **35** receives the sprocket support body **16**. The first end **36b** of the tubular body **36** abuts a shoulder **16a** of the sprocket support body **16**, thereby properly positioning the first sprocket assembly **29**. The second sprocket assembly **30** is connected to the bicycle rear hub assembly **10** such that the tubular body **40** of the second sprocket support member **39** receives the sprocket support body **16**. The first end **40b** of the tubular body **40** of the second sprocket support member **39** abuts the second end **36c** of the tubular body **36** of the first sprocket support member **35**. The threaded portion **34** of the second sprocket support member **39** of the second sprocket assembly **30** threadably engages the threaded portion **33** of the sprocket support body **16**, thereby securing the bicycle rear sprocket assembly **11** to the bicycle rear hub assembly **10**.

Referring to FIG. **8**, the first torque transmitting profile **31** includes at least one projection **31a** extending axially outwardly from the second end **36c** of the tubular body **36** of the first sprocket support member **35**. Preferably, the at least one projection **31a** includes a plurality of projections. The illustrated exemplary embodiment has eleven projections **31a**, although any suitable number of projections can be used. The projections **31a** extend in an axial direction substantially parallel to the rotational center axis **A**. The plurality of projections **31a** are circumferentially spaced on the first torque transmitting profile **31**.

The second torque transmitting profile **32** includes at least one recess **32a** configured to receive the at least one projection **31a**. Preferably, the at least one recess **32a** includes a plurality of recesses. The illustrated exemplary embodiment has eleven recesses **32a**, although any suitable number of recesses can be used. Preferably, there are an equal number of projections **31a** and recesses **32a**. The recesses extend in the axial direction substantially parallel to the rotational center axis **A**. The plurality of recesses **32a** are circumferentially spaced on the second torque transmitting

11

profile **32**. Alternatively, the at least one projection **31a** of the first torque transmitting profile **31** can be provided to the second sprocket assembly **30**, and the at least one recess **32a** of the second torque transmitting profile **32** can be provided to the first sprocket assembly **29**. Accordingly, one of the first torque transmitting profile **31** and the second torque transmitting profile **32** includes at least one projection **31a**, and the other of the first torque transmitting profile **31** and the second torque transmitting profile **32** includes at least one recess **32a** configured to receive the at least one projection **31a**.

When the first end **40b** of the tubular body **40** of the second sprocket support member **39** abuts the second end **36c** of the tubular body **36** of the first sprocket support member **35**, the second torque transmitting profile **32** engages the first torque transmitting profile **31** such that torque is transmitted between the first sprocket assembly **29** and the second sprocket assembly **30**. Each of the plurality of recesses **32a** receives one of the plurality of projections **31a**, thereby allowing for torque to be transmitted between the first sprocket assembly **29** and the second sprocket assembly **30**. With such a configuration, the bicycle rear sprocket assembly **11** can be mounted to the bicycle rear hub assembly **10** without forming splines.

As shown in FIGS. **9** to **12**, a bicycle rear sprocket assembly **111** in accordance with another illustrated exemplary embodiment of the present invention is substantially similar to the bicycle rear sprocket assembly **11** of the exemplary embodiment illustrated in FIGS. **1** to **8** except for the differences described below. Similar parts are identified with similar reference numerals, except increased by 100 (i.e., 1xx, accordingly).

In the illustrated exemplary embodiment shown in FIGS. **9** to **12**, one of the first sprocket assembly **129** and the second sprocket assembly **130** has a first threaded part **133**, and a connecting member **141** includes a second threaded part **142a** configured to threadably engage the first threaded part **133**. The second sprocket assembly **130** includes the first threaded part **133** disposed on a portion of the bore **140a**. Alternatively, the first threaded part **133** can be provided to the first sprocket assembly **129**. A threaded portion **145** is provided to the first sprocket assembly **129** to threadably engage the threaded portion **134** of the rear hub assembly **110**.

Referring to FIGS. **10** to **12**, the connecting member **141** is configured to connect the first sprocket assembly **129** and the second sprocket assembly **130**. The connecting member **141** has an outer surface **142** extending from a first end **141a** to a second end **141b**. The second threaded part **142a** is disposed on the outer surface **142** of the connecting member **141**. An inner surface **143** extends from the first end **141a** to the second end **141b** of the connecting member **141**. The connecting member **141** includes a tool engaging profile **143a** to facilitate connecting the first sprocket assembly **129** and the second sprocket assembly **130** using a tool. The tool engaging profile **143a** is disposed on the inner surface **143** of the connecting member **141**.

The other of the first sprocket assembly **129** and the second sprocket assembly **130** has a first axial abutment surface **144**. The first axial abutment surface **144** is disposed on either the first sprocket assembly **129** or the second sprocket assembly **130**, whichever is not provided with the first threaded part **133**. The first axial abutment surface **144** is provided to the first sprocket assembly **129**, as shown in FIG. **10**, and the first threaded part **133** is provided to the second sprocket assembly **130**. The first axial abutment surface **144** is disposed on an inner surface of the tubular

12

body **136** of the first sprocket assembly **129** between the first end **136a** and the second end **136b**. The connecting member **141** includes a second axial abutment surface **142b** configured to contact the first axial abutment surface **144**, as shown in FIGS. **10** to **12**. The second axial abutment surface **142b** is formed on the outer surface **142** of the connecting member **141** between the first end **141a** and the second end **141b**.

The first sprocket assembly **129** is disposed on the connecting member **141** such that the first axial abutment surface **144** of the first sprocket assembly **129** abuts the second axial abutment surface **142b** of the connecting member **141**. The second sprocket assembly **130** is then disposed on the connecting member **141** such that the second torque transmitting profile **132** engages the first torque transmitting profile **131** of the first sprocket assembly **129**. Accordingly, torque can be transmitted between the first sprocket assembly **129** and the second sprocket assembly **130** through the engaged first torque transmitting profile **131** and the second torque transmitting profile **132**.

A tool engages the tool engaging profile **143a** of the connecting member **141** to threadably engage the second threaded part **142a** of the connecting member **141** with the first threaded part **133** of the second sprocket assembly **130**, thereby connecting the first sprocket assembly **129** and the second sprocket assembly **130** and forming the bicycle rear sprocket assembly **111**. Accordingly, the rear sprocket assembly **111** is assembled prior to being mounted on the rear hub assembly **110**, as shown in FIG. **9**.

As shown in FIG. **10**, the bicycle rear sprocket assembly **111** is secured to the rear hub assembly **110** such that a threaded portion **145** of the first sprocket assembly **129** threadably engages the threaded portion **134** of the sprocket support body **116**, as shown in FIG. **10**, thereby connecting the rear sprocket assembly **111** and the rear hub assembly **110**. With such a configuration, the bicycle rear sprocket assembly **111** can be mounted to the bicycle rear hub assembly **110** without forming splines.

In understanding the scope of the present invention, the term “comprising” and its derivatives, as used herein, are intended to be open ended terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but do not exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The foregoing also applies to words having similar meanings such as the terms, “including”, “having” and their derivatives. Also, the terms “part,” “section,” “portion,” “member” or “element” when used in the singular can have the dual meaning of a single part or a plurality of parts unless otherwise stated.

As used herein, the following directional terms “frame facing side”, “non-frame facing side”, “forward”, “rearward”, “front”, “rear”, “up”, “down”, “above”, “below”, “upward”, “downward”, “top”, “bottom”, “side”, “vertical”, “horizontal”, “perpendicular” and “transverse” as well as any other similar directional terms refer to those directions of a bicycle in an upright, riding position and equipped with the bicycle rear sprocket assembly. Accordingly, these directional terms, as utilized to describe the bicycle rear sprocket assembly should be interpreted relative to a bicycle in an upright riding position on a horizontal surface and that is equipped with the bicycle rear sprocket assembly. The terms “left” and “right” are used to indicate the “right” when referencing from the right side as viewed from the rear of the bicycle, and the “left” when referencing from the left side as viewed from the rear of the bicycle.

Also it will be understood that although the terms “first” and “second” may be used herein to describe various com-

ponents these components should not be limited by these terms. These terms are only used to distinguish one component from another. Thus, for example, a first component discussed above could be termed a second component and vice versa without departing from the teachings of the present invention. The term “attached” or “attaching”, as used herein, encompasses configurations in which an element is directly secured to another element by affixing the element directly to the other element; configurations in which the element is indirectly secured to the other element by affixing the element to the intermediate member(s) which in turn are affixed to the other element; and configurations in which one element is integral with another element, i.e. one element is essentially part of the other element. This definition also applies to words of similar meaning, for example, “joined”, “connected”, “coupled”, “mounted”, “bonded”, “fixed” and their derivatives. Finally, terms of degree such as “substantially”, “about” and “approximately” as used herein mean an amount of deviation of the modified term such that the end result is not significantly changed.

While only selected embodiments have been chosen to illustrate the present invention, it will be apparent to those skilled in the art from this disclosure that various changes and modifications can be made herein without departing from the scope of the invention as defined in the appended claims. For example, unless specifically stated otherwise, the size, shape, location or orientation of the various components can be changed as needed and/or desired so long as the changes do not substantially affect their intended function. Unless specifically stated otherwise, components that are shown directly connected or contacting each other can have intermediate structures disposed between them so long as the changes do not substantially affect their intended function. The functions of one element can be performed by two, and vice versa unless specifically stated otherwise. The structures and functions of one embodiment can be adopted in another embodiment. It is not necessary for all advantages to be present in a particular embodiment at the same time. Every feature which is unique from the prior art, alone or in combination with other features, also should be considered a separate description of further inventions by the applicant, including the structural and/or functional concepts embodied by such feature(s). Thus, the foregoing descriptions of the exemplary embodiments according to the present invention are provided for illustration only, and not for the purpose of limiting the invention as defined by the appended claims and their equivalents.

What is claimed is:

1. A bicycle rear sprocket assembly comprising:
 - a first sprocket assembly including
 - at least one first sprocket; and
 - a first torque transmitting profile; and
 - a second sprocket assembly including
 - at least one second sprocket; and
 - a second torque transmitting profile configured to engage the first torque transmitting profile to transmit torque between the first sprocket assembly and the second sprocket assembly; and
 - a threaded portion provided to the first sprocket assembly, the threaded portion being configured to threadedly engage a bicycle rear hub assembly, the second sprocket assembly being not provided with the threaded portion and being free of a spline for engaging the bicycle rear hub assembly.
2. The bicycle rear sprocket assembly according to claim 1, wherein

- the at least one first sprocket includes a plurality of first sprockets.
3. The bicycle rear sprocket assembly according to claim 2, wherein
 - the at least one second sprocket includes a plurality of second sprockets.
 4. The bicycle rear sprocket assembly according to claim 1, wherein
 - one of the first torque transmitting profile and the second torque transmitting profile includes at least one projection,
 - the other of the first torque transmitting profile and the second torque transmitting profile includes at least one recess configured to receive the at least one projection.
 5. The bicycle rear sprocket assembly according to claim 4, wherein
 - the at least one projection extends in an axial direction parallel to a rotational center axis of the bicycle rear sprocket assembly, and
 - the at least one recess extends in the axial direction.
 6. The bicycle rear sprocket assembly according to claim 4, wherein
 - the at least one projection includes a plurality of projections, and
 - the at least one recess includes a plurality of recesses.
 7. The bicycle rear sprocket assembly according to claim 6, wherein
 - the plurality of projections are circumferentially spaced on the one of the first torque transmitting profile and the second torque transmitting profile, and
 - the plurality of recesses are circumferentially spaced on the other of the first torque transmitting profile and the second torque transmitting profile.
 8. The bicycle rear sprocket assembly according to claim 1, further comprising
 - a connecting member configured to connect the first sprocket assembly and the second sprocket assembly.
 9. The bicycle rear sprocket assembly according to claim 8, wherein
 - the connecting member includes a tool engaging profile.
 10. The bicycle rear sprocket assembly according to claim 9, wherein
 - the tool engaging profile is disposed on an inner surface of the connecting member.
 11. The bicycle rear sprocket assembly according to claim 8, wherein
 - one of the first sprocket assembly and the second sprocket assembly has a first threaded part, and
 - the connecting member includes a second threaded part configured to threadedly engage the first threaded part.
 12. The bicycle rear sprocket assembly according to claim 11, wherein
 - the second threaded part is disposed on an outer surface of the connecting member.
 13. The bicycle rear sprocket assembly according to claim 11, wherein
 - the other of the first sprocket assembly and the second sprocket assembly has a first axial abutment surface, and
 - the connecting member includes a second axial abutment surface configured to contact the first axial abutment surface.
 14. The bicycle rear sprocket assembly according to claim 1, wherein
 - the at least one first sprocket has a first sprocket diameter, and

15

the at least one second sprocket has a second sprocket diameter that is smaller than the first sprocket diameter.

15. A bicycle rear sprocket assembly comprising:

a first sprocket including

a first sprocket body;

a plurality of first sprocket teeth provided to a first outer periphery of the first sprocket body; and

a first torque transmitting profile, the first torque transmitting profile being disposed radially closer to a radially innermost surface of the first sprocket body than to a radially outermost surface of the first sprocket body; and

a second sprocket including

a second sprocket body;

a plurality of second sprocket teeth provided to a second outer periphery of the second sprocket body; and

a second torque transmitting profile configured to engage the first torque transmitting profile to transmit torque between the first sprocket and the second sprocket, the second torque transmitting profile being disposed radially closer to a radially innermost surface of the second sprocket body than to a radially outermost surface of the second sprocket body; and

a threaded portion provided to the first sprocket body.

16. The bicycle rear sprocket assembly according to claim 15, wherein

16

one of the first torque transmitting profile and the second torque transmitting profile includes at least one projection, and

the other of the first torque transmitting profile and the second torque transmitting profile includes at least one recess configured to receive the at least one projection.

17. The bicycle rear sprocket assembly according to claim 16, wherein

the at least one projection extends in an axial direction parallel to a rotational center axis of the bicycle rear sprocket assembly, and

the at least one recess extends in the axial direction.

18. The bicycle rear sprocket assembly according to claim 16, wherein

the at least one projection includes a plurality of projections, and

the at least one recess includes a plurality of recesses.

19. The bicycle rear sprocket assembly according to claim 18, wherein

the plurality of projections are circumferentially spaced on the one of the first torque transmitting profile and the second torque transmitting profile, and

the plurality of recesses are circumferentially spaced on the other of the first torque transmitting profile and the second torque transmitting profile.

* * * * *